

10 June 2020

Australian Securities Exchange Limited
Via Electronic Lodgement

DALGARANGA GOLD MINE – UPDATED MINERAL RESOURCE

- **Mineral Resource Estimate for the Dalgaranga Gold Project now 801,300 oz gold;**
- **Confidence level increased with Measured and Indicated now 628 koz;**
- **Mining depletion of 79koz replaced since the last resource statement;**

Gascoyne Resources Limited (“Gascoyne” or “Company”) (ASX:GKY) is pleased to provide an update to the Mineral Resource Estimate for the Dalgaranga Gold Project. The updated Mineral Resource estimate is **29.62Mt @ 0.84 g/t for 801,300 ounces of contained gold.**



Photo of Gilbey’s main pit looking north taken 7 June 2020

The updated Ore Reserve and Life Of Mine Plan (“**LOMP**”) for Dalgaranga is currently being finalised and due for release in the coming weeks. The updated Ore Reserve and LOMP is the result of greatly increased working knowledge and is majority based on the more predictable fresh component of the Gilbey’s Main Zone (“**GMZ**”). It will be generated using the updated Localised Uniform Conditioning (“**LUC**”) Resource model focussing on accessing the GMZ ore, with mine sequencing and processing schedules that maximise value.

Dalgaranga Resource Update

Gascoyne engaged independent consultants to update the Mineral Resource modelling and estimation. New Mineral Resource estimates for the Gilbey’s area (Gilbey’s, Gilbey’s South, Sly Fox and Plymouth deposits) have

been completed by Cube Consulting Pty Ltd (“**Cube**”). The updated Golden Wings deposit LUC model and Mineral Resource estimation was completed by SD2 Pty Ltd (“**SD2**”). It is very encouraging to see the new resource model compares closely with the reconciled Equigold historical production from the Gilbey’s main pit giving even further confidence in the operation going forward.

The Mineral Resource estimate is reported within a A\$2,800¹ per ounce of gold optimised pit shell in order to capture any mineralisation that may fall within an increasing gold price in the future. The updated Ore Reserves and LOMP will be a subset of the resource estimated at a more conservative gold price to take account of the current gold price and fluctuations in price during operations.

The updated global Dalgaranga Mineral Resource estimate is shown below in Table 1 and Table 2.

1. The mineralisation is constrained within an optimised pit shell using a gold price of A\$2,800 which demonstrates that there is a reasonable expectation that it will become economic (as per clause 41 of the JORC Code 2012).

Table 1 : Dalgaranga Gold Project
30th April 2020 Summary Mineral Resource Statement

Classification	Mt	Au g/t	Au koz
Measured	1.65	0.75	39.7
Indicated	21.22	0.86	588.6
Measured + Indicated	22.87	0.85	628.3
Inferred	6.76	0.80	173.1
TOTAL	29.62	0.84	801.3

Notes to Table 1 and 2:

1. The Mineral Resource estimate for the Gilbey’s, Gilbey’s South, Plymouth, and Sly Fox deposits has been compiled under the supervision of Mr Michael Job and Mr Michael Millad. Mr Michael Job is a Principal Geologist/Geostatistician at Cube Consulting Pty Ltd and a Fellow of the Australasian Institute of Mining and Metallurgy. Mr Michael Millad is a Director and Principal Geologist/Geostatistician at Cube Consulting Pty Ltd, and a Member of the Australasian Institute of Geoscientists. Both Mr Job and Mr Millad have sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity that was undertaken to qualify as Competent Persons, as defined in the 2012 Edition of the ‘Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (The Joint Ore Reserves Committee Code – JORC 2012 Edition).
2. The Mineral Resource estimate for the Golden Wings deposit has been compiled by Mr Scott Dunham, a Competent Person who is a Fellow of The Australasia Institute of Mining and Metallurgy and an employee of SD2 Pty Ltd. Mr Dunham has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity that was undertaken to qualify as a Competent Person, as defined in the 2012 Edition of the ‘Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (The Joint Ore Reserves Committee Code – JORC 2012 Edition).
3. Mineral Resource estimates are not precise calculations and the reported estimate is dependant on the interpretation of limited data pertaining to the location, shape, continuity of the mineralisation and the quality and quantity of the samples of the mineralisation.
4. Effective date of 30 April 2020.
5. Mineral Resources that are not Ore Reserves do not have demonstrated economic viability. The estimate of Mineral Resources may be materially affected by environmental, permitting, legal, title, taxation, socio-political, marketing, or other relevant modifying factors.
6. Mineral Resources are reported at variable cut-offs for the Gilbey’s, Gilbey’s South, Plymouth, and Sly Fox deposits at 0.25g/t Au outside black shale; 0.3g/t Au inside black shale; Golden Wings @ 0.3g/t Au cut-off within a constraining pit shell, provided to Cube and SD2 by Gascoyne, based on a gold price of A\$2,800 per ounce and based on Measured, Indicated and Inferred categories. Key inputs to the pit optimisation were as follows: Current Average Mining Costs = A\$3.90 per tonne; Current Average Processing Costs = A\$9.92 (Oxide) to A\$12.85 (Fresh) per tonne; Slope Angles = 30° to 56°; Process Recovery = 77% (Black Shale) and 87.45% (Fresh Lower) to 93% (Oxide Other).
7. Figures may not add up exactly due to rounding.

Table 2 : Dalgaranga Gold Project
April 30, 2020 Summary Mineral Resource Statement

**All Deposits, Resource Category, Oxide State In-Situ Inside MII A\$2800 Pit Shells. Variable cut-off for
Gilbey's, Gilbey's South, Plymouth, and Sly Fox at 0.25g/t Au outside black shale; 0.3g/t Au inside
black shale; Golden Wings @ 0.3g/t Au cut-off**

Gilbey's				
Classification	Ox State	Mt	Au g/t	Au koz
Measured	Oxide	-	-	-
	Transitional	1.09	0.75	26.1
	Fresh	0.56	0.76	13.6
Indicated	Oxide	0.15	0.57	2.7
	Transitional	1.06	0.78	26.3
	Fresh	19.04	0.86	528.6
Inferred	Oxide	0.07	0.35	0.7
	Transitional	0.18	0.46	2.6
	Fresh	5.81	0.81	150.8
	SUBTOTAL:	27.94	0.84	751.5
Gilbey's South				
Classification	Ox State	Mt	Au g/t	Au koz
Measured	Oxide	-	-	-
	Transitional	-	-	-
	Fresh	-	-	-
Indicated	Oxide	0.02	0.73	0.4
	Transitional	0.15	0.69	3.3
	Fresh	0.08	0.67	1.8
Inferred	Oxide	0.001	0.39	0.02
	Transitional	0.01	0.89	0.3
	Fresh	0.07	0.64	1.3
	SUBTOTAL:	0.32	0.68	7.1
Plymouth				
Classification	Ox State	Mt	Au g/t	Au koz
Measured	Oxide	-	-	-
	Transitional	-	-	-
	Fresh	-	-	-
Indicated	Oxide	0.10	0.80	2.5
	Transitional	0.01	0.72	0.2
	Fresh	0.0001	0.88	0.002
Inferred	Oxide	0.14	0.56	2.5
	Transitional	0.13	0.78	3.4
	Fresh	0.03	0.84	0.8
	SUBTOTAL:	0.41	0.71	9.4

Sly Fox				
Classification	Ox State	Mt	Au g/t	Au koz
Measured	Oxide	-	-	-
	Transitional	-	-	-
	Fresh	-	-	-
Indicated	Oxide	0.02	1.15	0.7
	Transitional	0.02	0.61	0.4
	Fresh	0.32	1.00	10.4
Inferred	Oxide	0.002	0.79	0.1
	Transitional	0.003	0.83	0.1
	Fresh	0.05	0.86	1.3
	SUBTOTAL:	0.42	0.97	13.0
Golden Wings				
Classification	Ox State	Mt	Au g/t	Au koz
Measured	Oxide	-	-	-
	Transitional	-	-	-
	Fresh	-	-	-
Indicated	Oxide	0.13	1.01	4.3
	Transitional	0.11	1.73	6.1
	Fresh	0.02	1.37	0.8
Inferred	Oxide	0.08	0.87	2.3
	Transitional	0.09	0.96	2.9
	Fresh	0.10	1.29	4.0
	SUBTOTAL:	0.53	1.19	20.4
GRAND TOTAL		29.62	0.84	801.3

*Figures may not add up exactly due to rounding.

Comparison to Previous Mineral Resource

Gilbey's Area (Gilbey's, Gilbey's South, Plymouth and Sly Fox)

The updated Mineral Resource estimate for the Gilbey's, Gilbey's South, Plymouth and Sly Fox deposits has not changed materially from the June 2019 estimate, however a number of factors have contributed to the change in the stated figures which are summarised in the waterfall chart in Figure 1 and Table 3.

Table:3 Gilbey's Area Mineral Resource statement comparison – June 2019 versus April 2020.

Category	LUC OK GC June 2019			LUC OK GC April 2020			LUC 2020 minus LUC 2019		
	Mt	Au g/t	Au koz	Mt	Au g/t	Au koz	Mt	Au g/t	Au koz
Measured	1.6	0.91	46	1.6	0.75	40	6%	-17%	-13%
Indicated	18.9	0.89	540	21.0	0.86	577	11%	-4%	7%
Indicated+Measured	20.5	0.89	586	22.6	0.85	617	10%	-5%	5%
Inferred	7.1	0.84	192	6.5	0.79	164	-9%	-6%	-14%
TOTAL	27.6	0.88	778	29.1	0.84	781	6%	-5%	0%

Note:

1. The term "OK" refers to Ordinary Kriging.
2. The term "GC" refers to Grade Control.

The new pit optimisation, is based on a gold price of A\$2,800, as opposed to the June 2019 A\$2,400 pit. As input mining costs have risen the new A\$2,800 pit is only slightly larger than the previous one despite the increase in spot gold price, with most of the volume increase focussed at the northern and southern ends of the Gilbey's Main Porphyry Zone.

The depletion of the Mineral Resource has occurred primarily on the peripheral lode domains, with a relatively small proportion having being derived from the relatively large updated relative high grade GMZ domains (Domains 101 and 102, see Figure 2).

In contrast to the previous June 2019 Mineral Resource estimate, the updated estimation domains for some areas, particularly within the Gilbey's Main Porphyry Zone, have been significantly modified relative to the previous Mineral Resource estimate undertaken in 2019. The new subdivisions follow the increased geological knowledge of the Gilbey's deposit in particular the use of information about the structural controls on the gold mineralisation. While the overall effect of this has been a relatively small change in the Mineral Resource, it has had a significant localised effect within the Gilbey's Main Porphyry Zone. Previously the primary domain for this area was Domain 101, which has now been split into three separate but adjacent zones, named Domains 100, 101 and 102 (see Table: 4 for descriptions of the specific characteristics of these domains and Figures 2-4).

Another significant change is that the overall modelled dip of the southern Gilbey's Main Porphyry domains has flattened significantly due to recent additional drilling between local grid 3400mN and 3800mN as announced in the *ASX release dated 6 May 2020*. A significant volume of material has been upgraded from the Inferred category to the Indicated category as a result of this drilling, which has increased the confidence in the material at depth in the southern area of the GMZ.

The change to a variable cut-off grade for reporting in the 2020 model, differentiating the black shales (0.30 g/t cut-off) from other material, has had an impact on the reported Mineral Resource, with a drop in reporting cut-off to 0.25g/t outside of the black shales being the key factor.

It is important to note that using a spot price of AUD\$2,400 per ounce of gold, 0.25 grams is valued at \$19.30. With processing costs at Dalgaranga of less than \$15 per tonne, it is clear that an economic benefit can be derived from these very low cut-off grades.

A higher grade portion of the Measured category has been mined between June 2019 and April 2020, and relatively lower grade material was added to this category in the Gilbey's Main Porphyry Zone (lower grade oblique lodes in Domain 100) due to additional Grade Control ("GC") drilling. The net effect has little change in tonnage but a drop in grade for the Measured category.

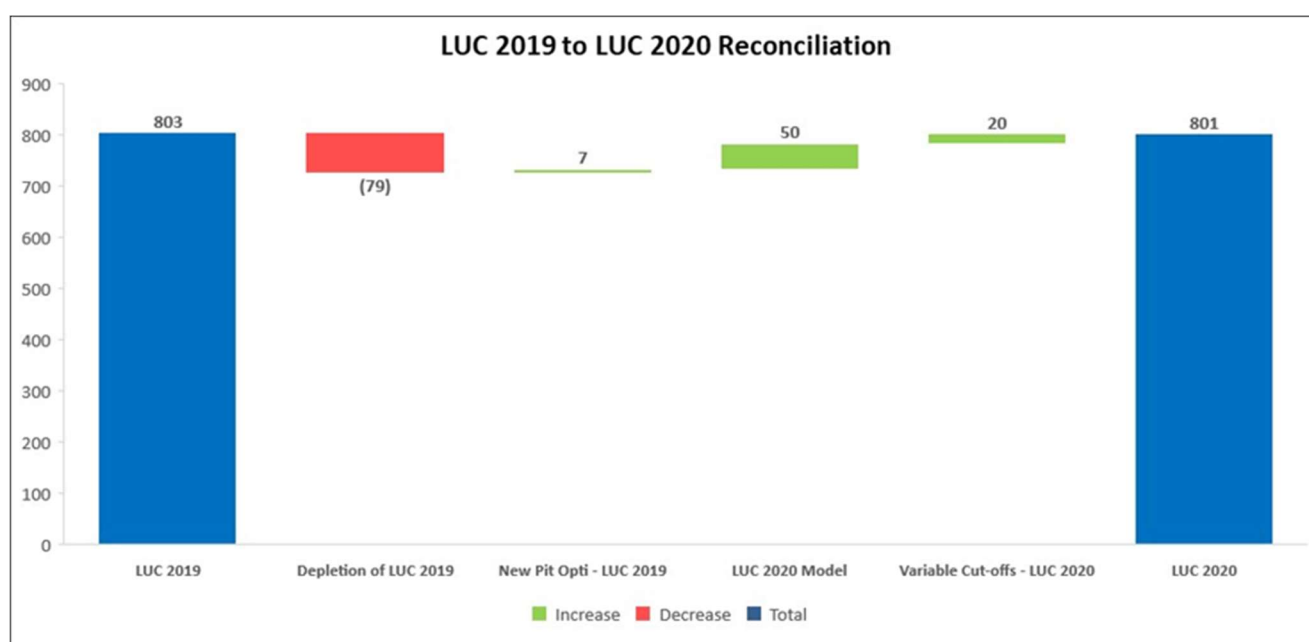


Figure 1: Waterfall chart showing change in gold ounces from June 2019 to April 2020 (includes Golden Wings).

Table: 4 Descriptions of the Broad Mineralised Domains for gold grade estimation – orientations refer to local grid.

Domain Code	Description	Area
100	Gold mineralisation associated with the north-south fold limb (local grid) and the Gilbey's Main Porphyry Zone. A relatively low grade zone characterised by oblique orientation of narrower lodes that strike approximately NNE-SSW on local grid, in contrast to the adjacent higher grade Domain 102, which strikes N-S. Internal lodes dip moderately-to-steeply towards local WNW.	Gilbey's Main Oblique Footwall Lodes
101	Gold mineralisation associated with the north-south fold limb (local grid) and the southern portion of the Gilbey's Main Porphyry Zone. A relatively high grade zone with well-developed lodes striking NNE-SSW and dipping moderately-to-steeply towards local WNW. Considered to be one of the two most continuous and least erratic mineralised zones in the project area, along with Domain 102. An oblique fault zone striking NNE-SSW defines the NW boundary of Domain 101.	Gilbey's Main Zone - South
102	Gold mineralisation associated with the north-south fold limb (local grid) and limited to the western side of the Gilbey's Main Porphyry Zone. A prominent black shale horizon defines the eastern edge of this domain. A relatively high grade zone with well-developed lodes oriented either N-S or, in places, NNE-SSW. Lodes dip moderately-to-steeply towards local W and local WNW. Considered to be one of the two most continuous and least erratic mineralised zones in the project area, along with Domain 101.	Gilbey's Main Zone - West
103	Gold mineralisation associated with a portion of the north-south limb (local grid) and the Gilbey's Main Porphyry Zone in the far north, which has been sinistrally displaced about 70m to the west of Domain 102. Internal lodes dip moderately-to-steeply towards the west.	Gilbey's North
104	Near-surface gold mineralisation associated with a portion of the north-south limb (local grid) in the Gilbey's Main Porphyry Zone to the south of Domains 100 and 101, where structural disruption in the hinge zone begins to have a significant impact. Internal lodes dip moderately to the west.	Gilbey's Starter Pit Area
201	A relatively narrow band of well-defined mineralisation in the hangingwall of the Gilbey's Main Porphyry Zone, trending towards the north-northeast (local grid). This zone is associated with a number of black shale horizons. Internal lodes dip moderately-to-steeply to the west.	Gilbey's Hangingwall Lode - South
202	A continuation of the Domain 201 feature to the north, eventually merging with Domain 102. Internal lodes dip moderately-to-steeply to the west.	Gilbey's Hangingwall Lode - North
203	Highly erratic and discontinuous mineralisation in the footwall of the southern hangingwall lode, stretching across to the west to Domain 104. Internal lodes appear to strike NNE-SSW (local grid) and dip moderately to steeply to the WNW.	Gilbey's HW Link Zone
401	A diffuse trend of highly erratic and discontinuous mineralisation in the footwall of the Gilbey's Main Porphyry Zone and situated on the north limb of the fold. Internal lodes strike NNE-SSW (local grid) and dip moderately to steeply to the WNW.	Gilbey's Eastern Cutback Lodes
402	A second diffuse trend of highly erratic and discontinuous mineralisation in the footwall of the Gilbey's Main Porphyry Zone, situated to the immediate west (local grid) of Domain 401.	Gilbey's Eastern Cutback Lodes
501	A diffuse trend of highly erratic and discontinuous mineralisation in the far SW (local grid) of the project area. Situated on the near-hinge portion of the E-W limb of the fold. Internal lodes dip moderately-to-steeply towards the N.	Gilbey's South
502	A diffuse volume of highly erratic and discontinuous mineralisation situated immediately below Domain 501. Internal lode orientation is uncertain due to limited drilling.	Gilbey's South
601	A diffuse trend of highly erratic and discontinuous mineralisation in the southeast (local grid) of the project area. Possibly a strike extension of the mineralisation trends defined by Domains 401 and 402. Internal lodes dip moderately-to-steeply towards the W.	Plymouth
701	Reasonably continuous mineralisation associated with the Sly Fox Porphyry Zone, and situated in the SE (local grid) along the E-W limb of the fold. Internal lodes dip steeply towards the N.	Sly Fox
900	Mineralised waste domain – defined around all the above mineralised domains out to the limit of drilling	-

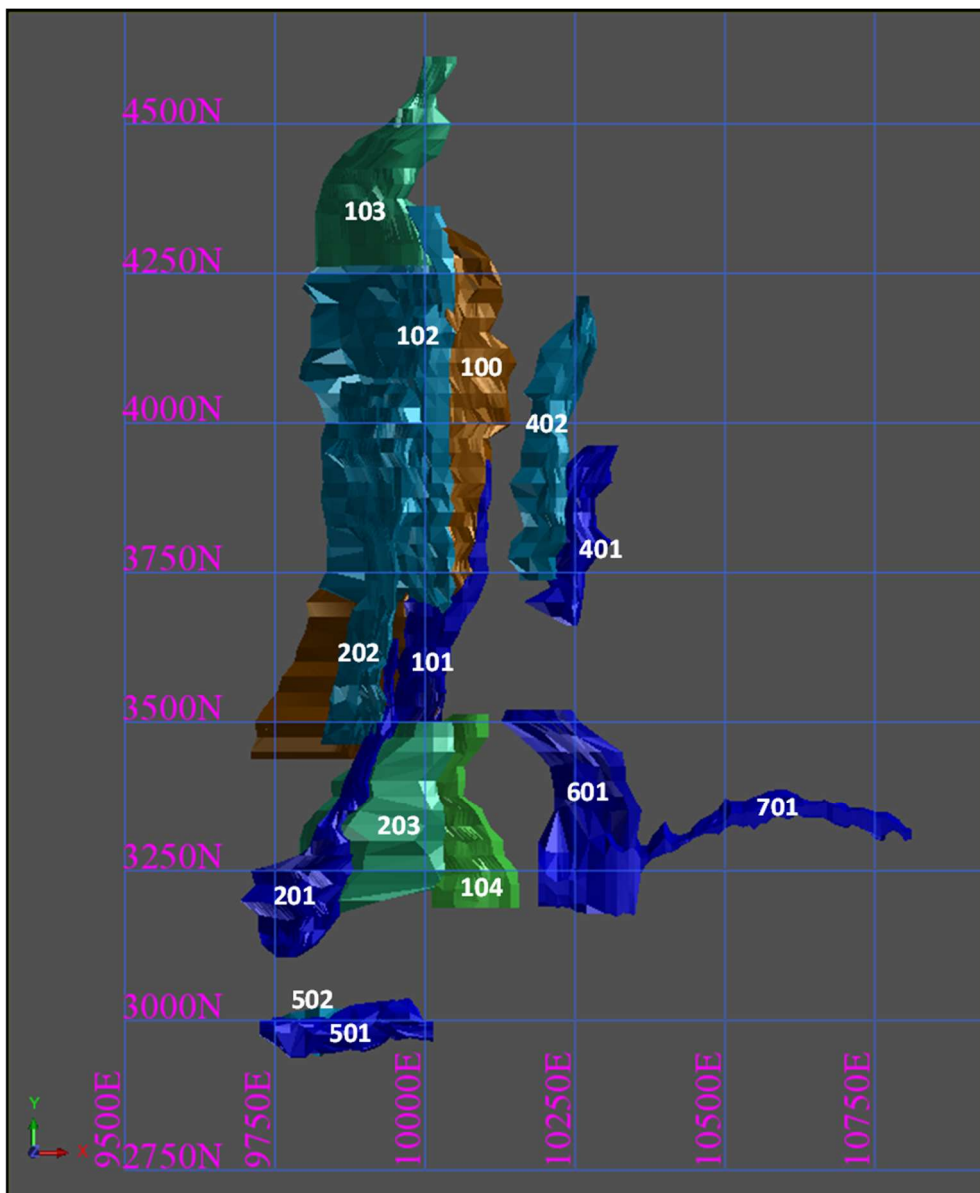


Figure 2: Gilbey's Area Plan view (local grid) of the broad estimation domains for gold estimation.

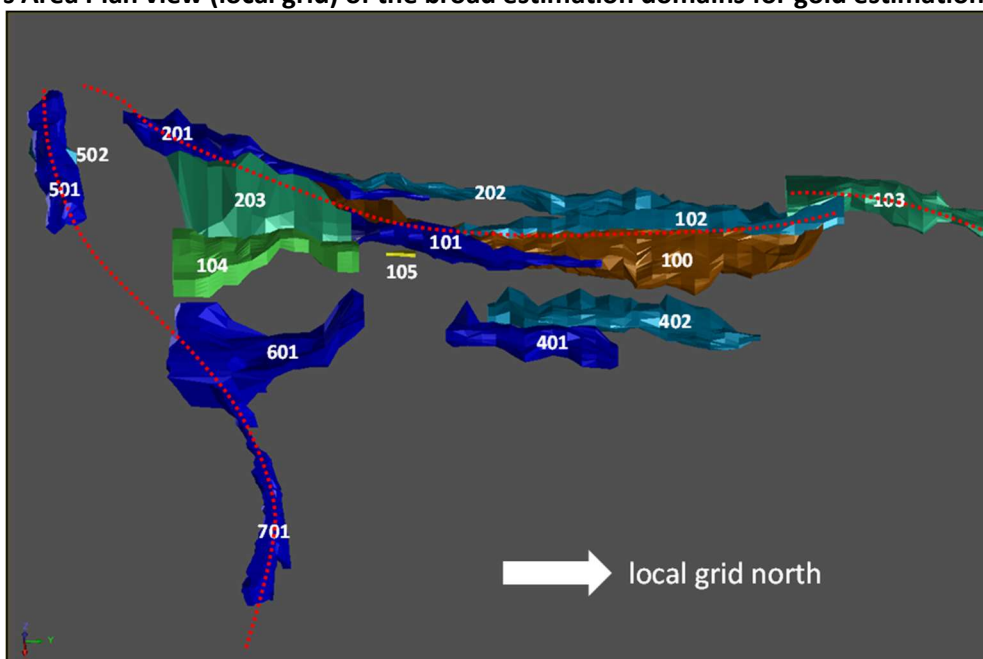


Figure 3: Gilbey's Area Isometric view looking down-dip on the north-south limb domains, with red dashed line indicating the approximate shape of the fold axis

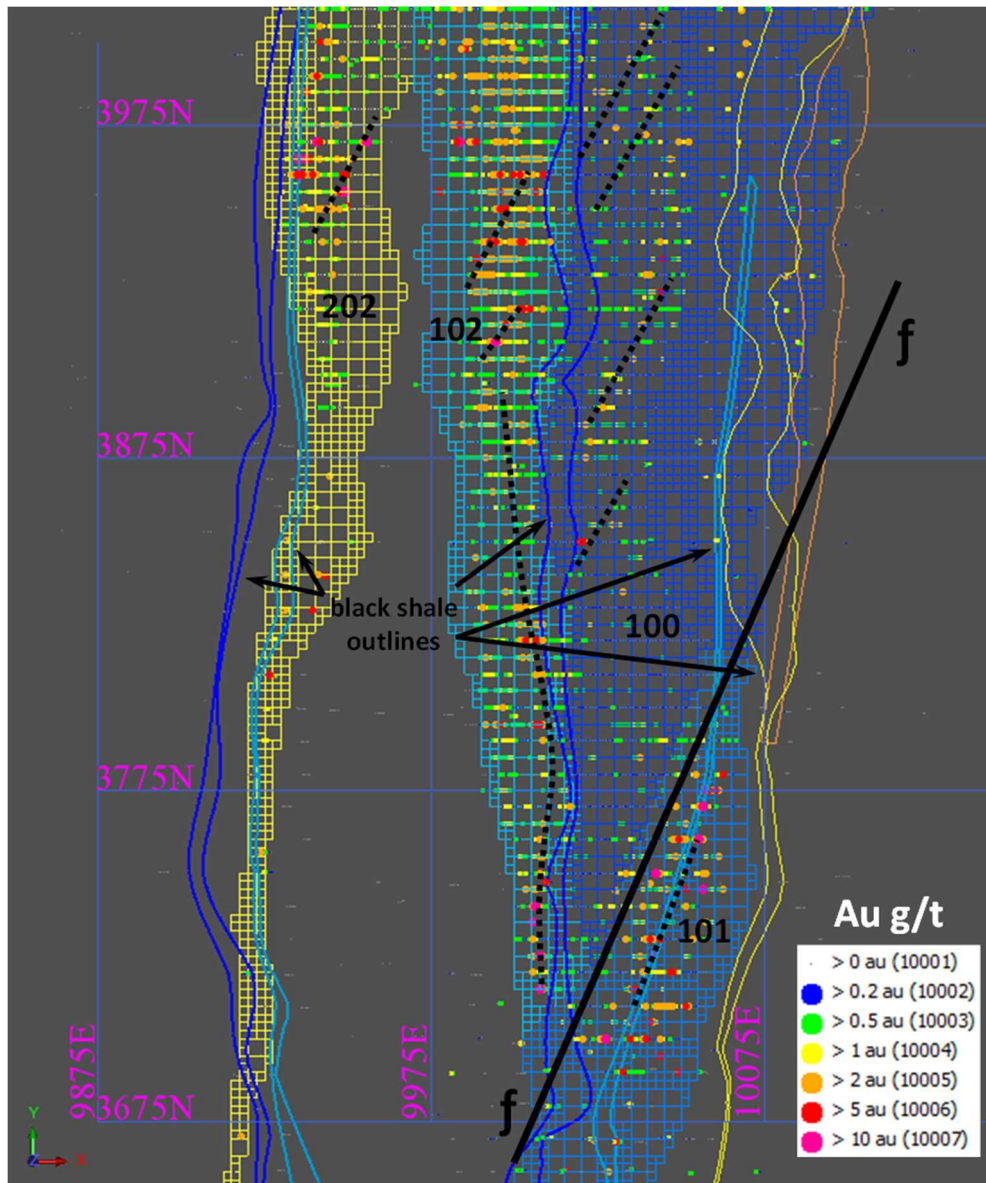


Figure 4: Plan cross-section view at 355mRL – estimation domains represented by variably coloured blocks. Key lithological and structural features are shown, including mineralisation trends oblique to main zone trend (stippled lines).

The historical Equigold actual production figures were compared to the combined LUC and Ordinary Kriging (“OK”) GC model. The comparison was undertaken within the historical pit volume, and the Mineral Resource was reported at a 0.7g/t Au cut-off, to mimic the mining cut-off used by Equigold. Figures for the total volume are compared in Table 5 and the tonnes, grade and gold ounces are compared by elevation slice in Figure 5 to Figure 7.

Table 5: Comparison of Equigold Actual Production to the 2020 LUC OK GC Model

Equigold Actual			LUC OK GC Model @ 0.7g/t Au			% difference (Model - Equigold)		
kt	Au koz	Au g/t	kt	Au koz	Au g/t	kt	Au koz	Au g/t
4,392	218	1.54	4,481	220	1.53	2.0%	1.1%	-0.9%

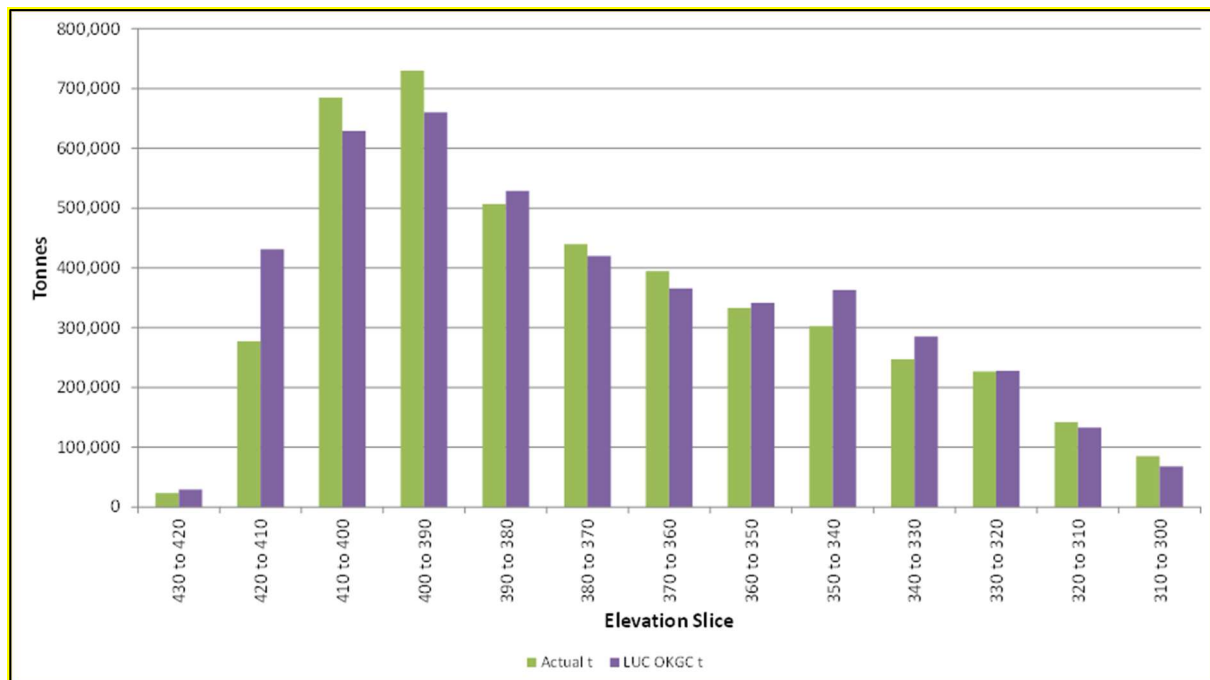


Figure 5: Tonnes comparison by elevation slice – Equigold Actuals vs LUC OK GC Model

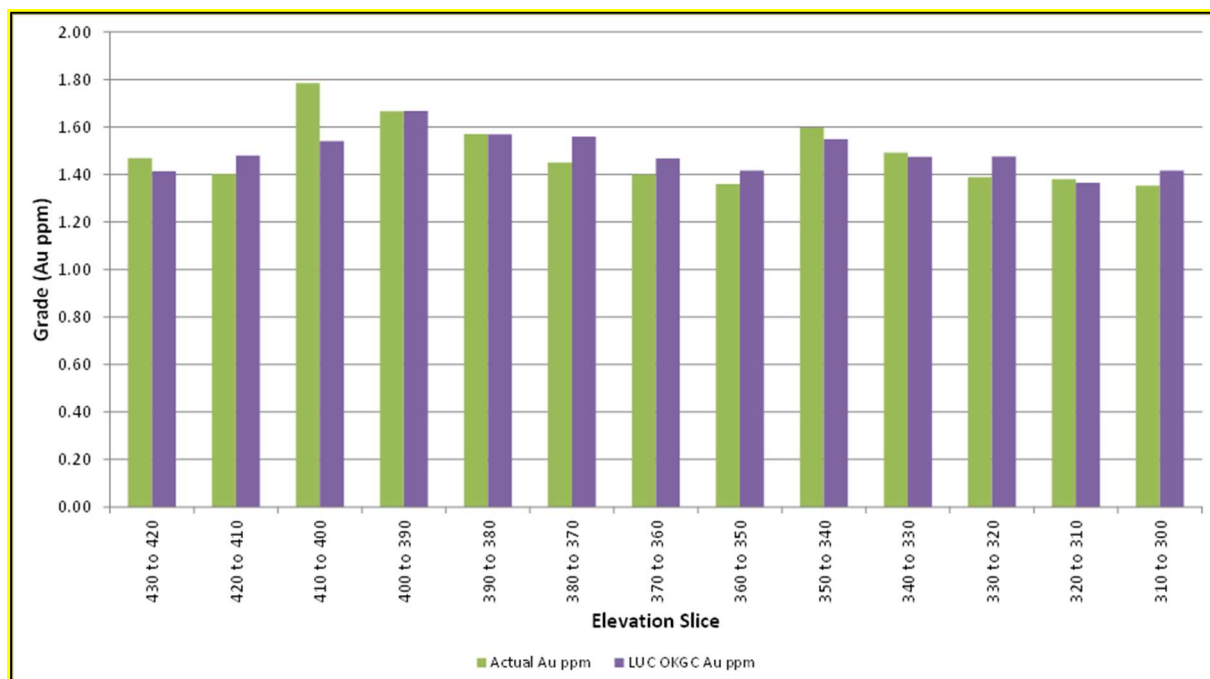


Figure 6: Gold grade comparison by elevation slice – Equigold Actuals vs LUC OK GC Model

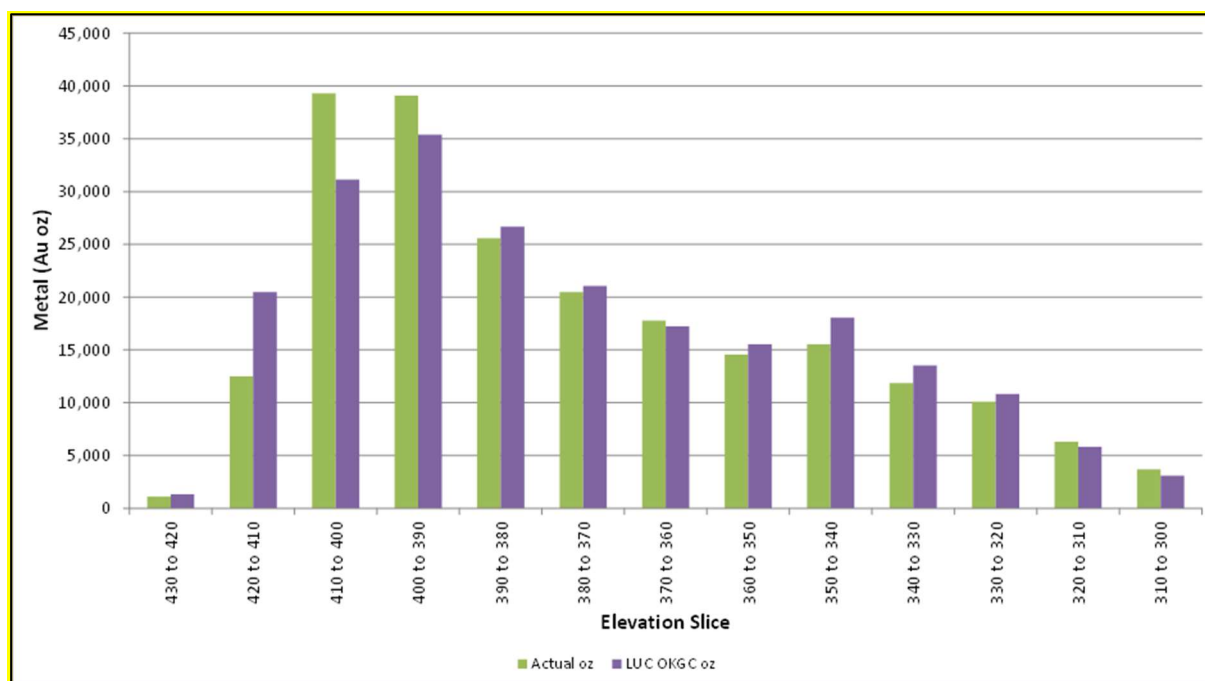


Figure 7: Gold ounces comparison by elevation slice – Equigold Actuals vs LUC OK GC Model

The global comparison for the Equigold mined volume shows that the Mineral Resource falls within approximately 2% of the actuals in terms of the tonnes and gold ounces prediction, with the gold grade being almost identical for both. This is an excellent result increasing confidence in the overall LUC model estimate for Gilbey's. The comparison volume encompasses primarily the Gilbey's Main Porphyry Zone (LUC Domains 100, 101 & 102) with a subordinate amount of material also having been mined from the hangingwall lode Domain 202.

The comparison by elevation slice shows good correlation between the model and Equigold actuals, with the exception of the 390m to 410m elevation range, where the model is significantly under-calling the tonnes and therefore the gold ounces. The reason for this is probably due to the inability of the Resource Development ("RDV") drill data to adequately characterise a narrow zone of supergene enrichment in this portion of the oxide zone. However, for the most part, the predictive ability of the model is considered to be good within the volume of comparison, both on a global and semi-local basis.

Since the Life-of-Mine plan calls for the vast majority of gold to be mined in this area, chiefly targeting the volume below the Equigold pit, this is an important result supporting the robustness of the estimation methods used.

Appendix 1 contains notes related to the Mineral Resource estimate for the Gilbey's, Gilbey's South, Sly Fox and Plymouth deposits compiled under the supervision of Mr Michael Millad, Director and Principal Geologist/Geostatistician and Mr Michael Job, Principal Geologist/Geostatistician at Cube Consulting Pty Ltd. Additional information is contained in Appendix 3 (JORC Table 1).

Golden Wings

Comparison between the 2019 LUC estimate against the 2020 estimate shows the two estimates are similar across all grade ranges; with the 2020 estimate showing slightly lower tonnages in the range between 0.6 g/t Au and 3.5 g/t Au, which reflects the change in domaining isolated pods of mineralisation which have been excluded from the 2020 estimate (see Figure 8). The 2020 update compared the grade control estimate from material mined between April 2019 and March 2020 at both the 0.3 g/t and 0.5 g/t cut-off which showed an improvement in the new model reflecting the impact of additional drill hole data and changes to the domains used in the 2020 estimate. **The Mineral Resource estimate of 533,000t at 1.2g/t for 20.0koz of contained gold** (Table 2) is reported within a constraining optimised pit shell using a A\$2,800 per ounce gold price.

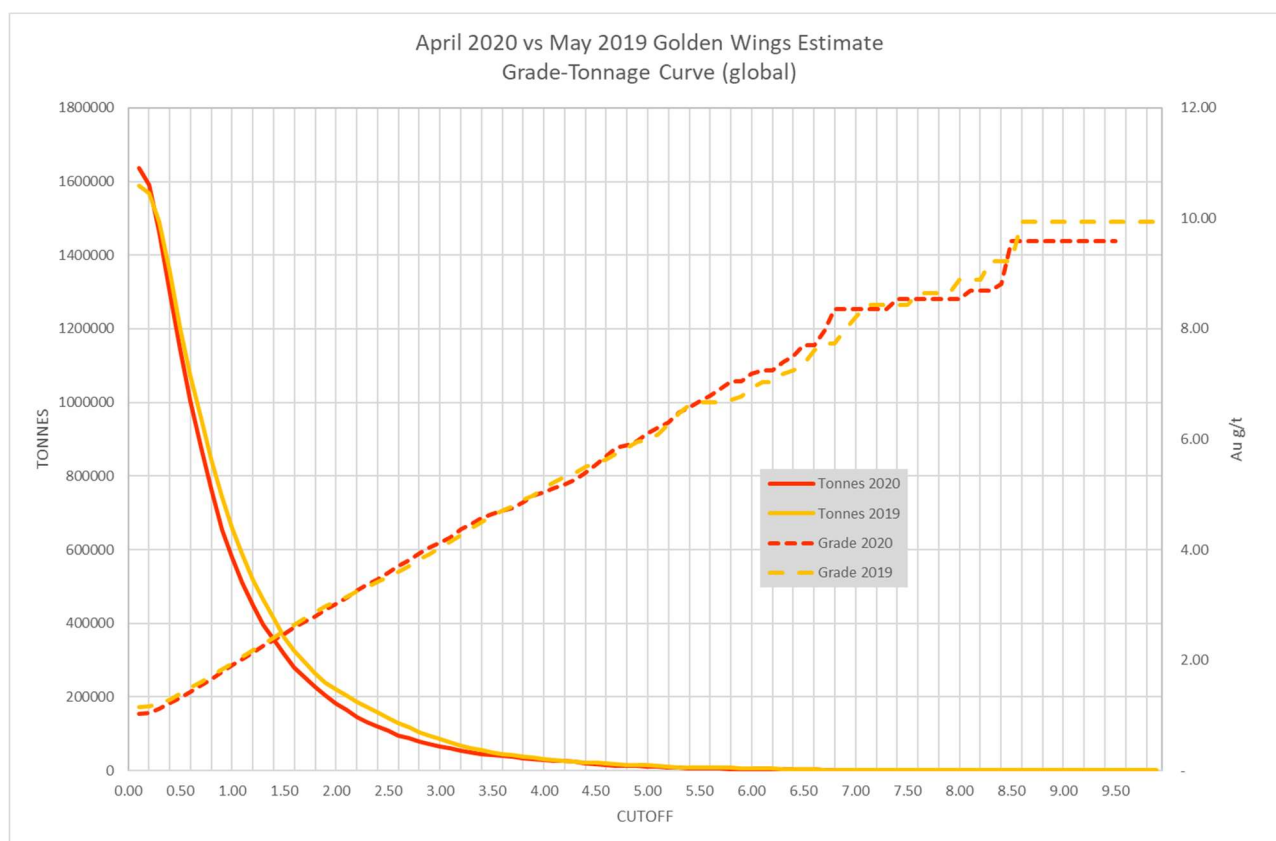


Figure:8 2020 Golden Wings 2020 Estimate vs 2019 Estimate (grade-tonnage curves)

Appendix 2 contains notes related to the Mineral Resource estimate for the Golden Wings deposit compiled under the supervision of Mr Scott Dunham an employee of SD2 Pty Ltd. Additional information is contained in Appendix 4 (JORC Table 1 Golden Wings).

Appendix 1

Listing Rule 5.8.1

Pursuant to ASX listing rule 5.8.1, and in addition to the information contained in Appendix 3, the Company provides the following in respect of the April 2020 Dalgaranga Mineral Resource estimate update for the Gilbey's, Gilbey's South, Sly Fox and Plymouth deposits:

Notes on Gilbey's, Gilbey's South, Sly Fox and Plymouth Deposits and Mineral Resource Estimate

Dalgaranga Deposit Geology and Geological interpretation;

Regional Geology

The Dalgaranga Gold Project is located within the Dalgaranga Greenstone Belt in the Murchison Province of Western Australia (Figure 16). The northeast trending belt consists of high magnesium basalt, tholeiitic basalt, intermediate volcanic, felsic intrusive porphyry, and a volcano-sedimentary sequence dominated by black shale and volcanoclastic lithologies. Felsic volcanic rocks outcrop on the western side of the belt, north of the Gilbey's and Golden Wings deposits. The Greenstone sequence is intruded by large gabbro complexes in the north (Mt Farmer, Mt Charles) and to the west (Dalgaranga Hill). The stratigraphy has been folded into two regional synforms which plunge in opposite directions, separated by a regional fault/shear along the western side of the Mt Farmer gabbro sill, westwards to the south side of the gabbroic Dalgaranga Hill. The Dalgaranga Greenstone Belt is intruded by a number of post-tectonic granites separated by zones of amphibolite and mafic schists intruded by pegmatites. East-west trending Proterozoic dykes of dolerite and gabbro intrude the Greenstone sequences.

Geophysical interpretation of the region shows large scale northeast structures and a general fabric also oriented northeast. The fabric and structures cross cut folded stratigraphy and are synonymous with regional mineralised corridors.

Gilbey's

Gold mineralisation in the Gilbey's area (Gilbey's, Gilbey's South, Sly Fox and Plymouth) is hosted within folded sequences, with the Gilbey's deposit located on the northern limb of a regional anticline, within a dextral ductile shear 100-200m wide. The shear zone trends northeast and dips northwest, sub-parallel to the stratigraphy which strikes between 055° - 065°.

The stratigraphic package from east to west is footwall dolerite/gabbro and footwall shale. To the immediate west of this are interbedded volcanoclastics, sheared shale and porphyry, that collectively are termed the Main Porphyry Zone, and which host most of the gold mineralisation at Gilbey's. The hangingwall unit is a package of high magnesium basalt, intrusive gabbro and dolerite. The Gilbey's Anticline is partially overturned with the northern limb (as described above) dipping to the northwest, with the southern/eastern limb (host to Gilbey's South and Sly Fox deposits) sub-vertical or dipping steeply north.

The main body of mineralisation in the Gilbey's deposit, the Main Porphyry Zone, varies from 20m to 110m in width (Figure 9). The combined thickness of the Main Porphyry Zone and parallel mineralised zones is up to 200m wide. While the thickness of shale units is highly variable along strike, they are consistently located within the mineralised Main Porphyry Zone and footwall positions. The porphyry, however, appears to lens out or plunge to the north and south.

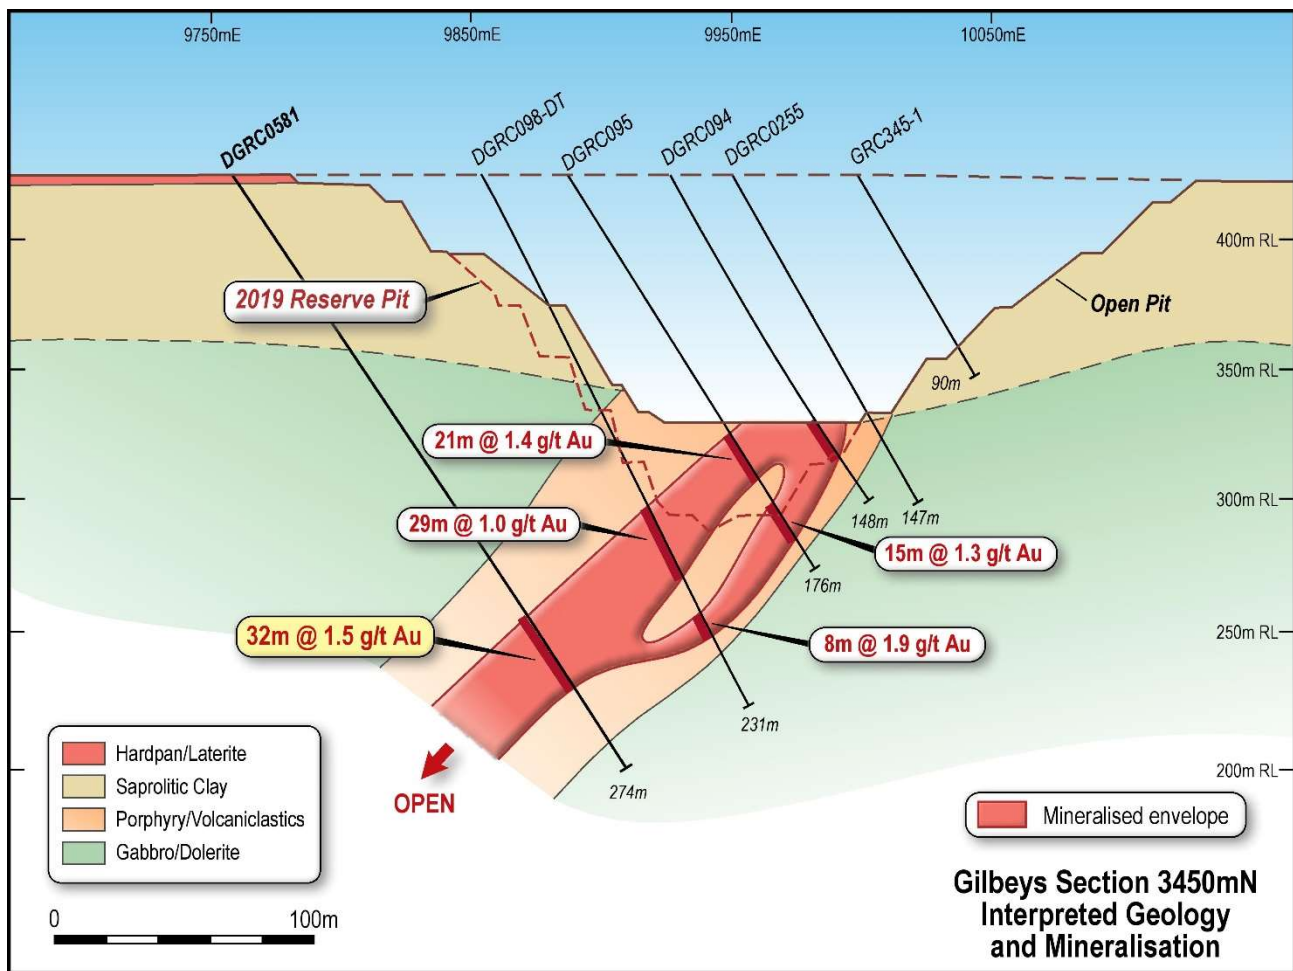


Figure 9: Cross-section interpretation of the Gilbey's deposit at local grid 3450mN, looking northwards

The footwall shale is moderately graphitic, pyritic and usually contains pyrrhotite. It varies from 10m thick in the south to over 20m thick in the north. This unit appears to form the eastern boundary to the strongest deformation, acting in a very ductile manner during the deformation.

The style of mineralisation at Gilbey's can be described as a quartz-pyrite-carbonate veined ductile shear system. Pyrite is the most common sulphide, however pyrrhotite is also a common sulphide particularly in the shale mineralised zones. Biotite/sericite and carbonate alteration are synonymous with mineralisation.

The major control on mineralisation at Gilbey's is structure. A major ductile shear hosts the mineralisation, with the ore grade material developing as consistently wide sub-parallel lodes in the areas of strongest shearing. This structure was folded prior to gold mineralisation by north-northwest striking (local grid) subvertical high strain zones which were subsequently refolded by east-west striking sub-vertical folds. A flat, late vein stage system is visible in the footwall and ore-zone; all four sets of quartz + sulphide veins are variably mineralised. The predominant mineralised veins are narrow, discontinuous and parallel to the shear zone, forming as ductile syn-deformational shear veins and rotated tensional veins within the overall sheared sequence and shallow dipping, short range north-northwest striking linking structures. Short strike northwest to north-northwest and east-west trending structures offset the stratigraphy having only minor influence on the geometry of mineralisation.

In the north of the Gilbey's deposit the stratigraphy and mineralisation is sinistrally offset by a fault, with apparent offset of ~70m, or alternatively the mineralisation is dragged into a more north-south zone of shearing. The shale/porphyry host sequence continues northward.

Lesser amounts of mineralisation outside of the Main Porphyry Zone are associated with highly discontinuous structures in the footwall and hangingwall. While the historical Equigold mining focussed on the upper portion of the

Main Porphyry Zone, the bulk of the GCY mining from 2018 to date has been within these areas of lesser structural and mineralisation continuity.

Plymouth

The Plymouth deposit is located approximately 150m northwest of Sly Fox and south of Gilbey's (Figure 17). At Plymouth the higher grade mineralisation is related to a north trending and westerly dipping zone defined to date by drilling to be over 150m in length; open to the north and open down dip. Gold mineralisation occurs within quartz veined and silica-pyrite-biotite altered schists. Mineralisation is most consistent at a vertical depth of ~60-80m. Highly oxidised / leached upper saprolite to about 30m vertical depth has inconsistent grade on most sections

Sly Fox

The Sly Fox deposit is located approximately 500m southeast of the Gilbey's deposit (Figure 17), on the eastern limb of the southerly plunging anticline, within a dextral ductile shear zone in the equivalent portion of the stratigraphy that hosts the Gilbey's Main Porphyry Zone in the northern limb. The shear zone trends to the northwest (MGA grid) and dips steeply northeast at approximately 80° cross-cutting the broadly east-west striking stratigraphy.

The Sly Fox deposit occurs within a shear zone (Figure 10) that trends northwest for approximately 300m. Gold mineralisation is associated with silica-sericite-pyrite altered biotite-carbonate schists and black shale zones. Strong weathering/oxidation occurs up to 40m below the surface. Mineralisation dips -80° to the northeast and is highly predictable down-dip. Mineralisation is open down-dip and along strike to the northwest.

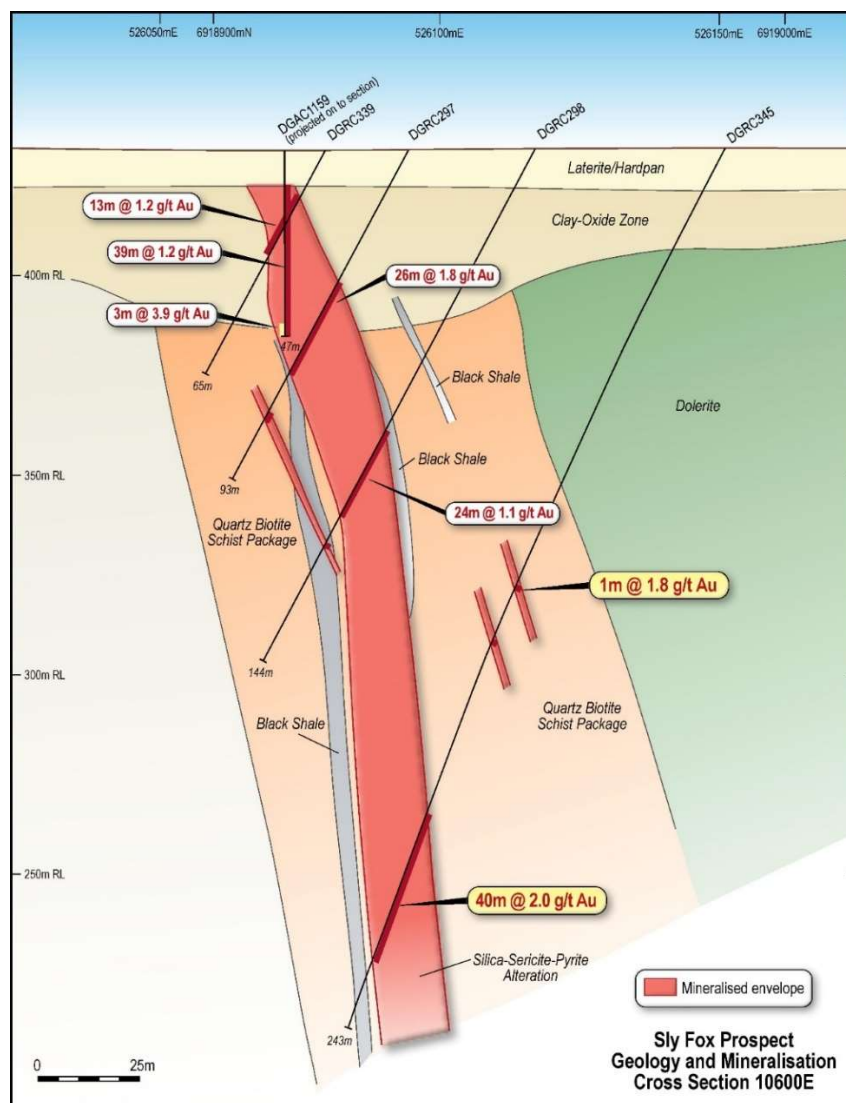


Figure 10: Cross-section interpretation of the Sly Fox deposit at local grid 10600mE, looking westwards

Drilling and Sampling, and Sample Analysis Techniques;

The Gilbey's, Sly Fox, and Plymouth gold deposits have been sampled using Trenches ("TR"), Rotary Air Blast ("RAB") drilling, Air Core ("AC") drilling, Reverse Circulation ("RC") drilling and Diamond ("DD") drilling over numerous campaigns by several companies and currently by Gascoyne. GC RC drilling was undertaken by Gascoyne, commencing with mining in 2018 and continuing through to the present time. RDV drilling has also been undertaken by Gascoyne, using primarily the RC methods, with a lesser amount of DD holes. The majority of GC RC holes have been drilled on a 10m x 7.5m grid over modelled mineralisation. The TR, RAB and AC samples have been excluded from gold interpolation for this Mineral Resource estimate since these sampling methods are considered to be of insufficient quality for the purpose of resource definition. These lower quality results, were, however, used to assist in the interpretation of mineralisation domains for interpolation of gold grade. The very dense TR samples in particular have proven to be very useful in informing the estimation approach, due to the high resolution with which they highlight the dominantly structural controls on mineralisation.

A breakdown of all holes in the database for use in the Mineral Resource estimate are shown in Table 6. The majority of historical "drill" metres are GC trenches from the Equigold pit (grade control samples for oxide and transitional material).

Hole Type	Period	No. Holes	Metres
RC - RDV	Historical	316	31,145
	GNT	411	49,432
RC - GC	Historical	1,669	25,614
	GNT	5,042	142,052
DD	Historical	32	8,696
	GNT	9	1,099
RC with DD Tail	Historical	0	0
	Gascoyne	19	5,270
AC	Historical	80	4,735
	Gascoyne	637	23,671
RAB	Historical	261	12,635
	Gascoyne	0	0
TR	Historical	11,512	268,274
	GNT	28	1,032
Unknown	Historical	3	198
	GNT	0	0
WB	Historical	0	0
	GNT	19	2,273
SUBTOTALS	Historical	13,873	351,297
	GNT	6,165	224,829
GRAND TOTAL		20,038	576,126

Table 6: Breakdown of drill holes and Trenches in Gilbey's Area Drill Database

Drilling methods used by historical operators are assumed to be in line with industry standards at the time.

Gascoyne Resource Development RC drilling and GC RC drilling used a nominal 5½ inch diameter face sampling hammer. AC drilling used a conventional 3½ inch face sampling blade to refusal or a 4½ inch face sampling hammer to a nominal depth. The DD was undertaken either as diamond tails to RC pre-collars or exclusively as DD from the collar. NQ and HQ diameter core was collected from DD holes.

Sampling methods used by historical operators are assumed to be in line with industry standards at the time.

The sampling procedure for RC drilling undertaken by Gascoyne can be summarised as follows:

- Drill chips were collected via the cyclone at the drill rig, with the cyclone routinely cleaned between successive samples.
- A 3-5kg split was obtained either by using a static cone splitter or riffle splitter.

- In the case of RDV RC holes, 4m composite samples were collected near surface where no significant mineralisation was expected, otherwise the standard sampling interval was 1m.
- GC RC holes were sampled at 1m intervals throughout.

The sampling procedure for DD drilling undertaken by Gascoyne can be summarised as follows:

- Half-core samples were collected for the NQ diameter core, with the left hand side of the core being sampled in all cases.
- Quarter core samples were collected in the case of HQ core, with the left hand side of the left hand half being sampled.

The sampling procedure for AC drilling undertaken by Gascoyne can be summarised as follows:

- 4m composite samples of 3-5kg were collected for all AC drill holes using a spearing method.
- Where significant mineralisation was detected in a 4m composite samples, 1m samples were collected from the relevant interval and re-submitted for analysis.

Detailed logging for most historical holes exists in the Gascoyne database.

Gascoyne Reverse Circulation, DD and Aircore Logging procedures

- Current RC and AC chips are geologically logged at 1m intervals and to geological boundaries respectively.
- RDV RC hole chip trays and end of hole chips from AC drilling have been stored for future reference.
- Drill chips from GC RC drill holes are not retained, with exceptions being retained to confirm lithological logging.
- RC and AC chip logging recorded the lithology, oxidation state, colour, alteration, sulphides and veining.
- DD holes have all been geologically, structurally and geotechnically logged.
- The core was photographed tray-by-tray, both wet and dry.
- Historical collars were reportedly surveyed to within ± 1 m accuracy.
- All drill hole collars were surveyed in the MGA94 Zone 50 grid.
- Gascoyne drill collars have been surveyed by DGPS equipment and mine site Surveyors.
- The hole collars and downhole survey azimuths were transformed to Gilbey's local grid for use in this Mineral Resource estimate. The rotation parameters specified involve an anticlockwise rotation of approximately 45°, in addition to the grid co-ordinate shift. This means that the Gilbey's Main Porphyry Zone strikes almost exactly north-south and Sly Fox east-west in the local grid system.
- For Gascoyne drilling, a down hole survey was taken at least every 30m in RC and DD holes by electronic multi-shot tool by the drilling contractors.
- GC RC drill holes completed after August 2018, except for a few holes where equipment was not available, were surveyed with a minimum of two surveys per hole.
- Gyro surveys have been undertaken on selected holes to validate the multi shot surveys.
- AC holes were not down hole surveyed due to their shallow nature.

No sample recovery information is available for historical drilling.

Information on Gascoyne drill sample recovery is as follows:

- RC and AC samples were visually checked for recovery, moisture and contamination.
- RC and AC sample recovery was visually assessed and recorded where significantly reduced. Very little sample loss was noted.
- The DD drill core was measured and orientated to determine recovery, which was generally 100%. The diamond drilling recovery was therefore excellent with very little to no core loss identified.
- Sample recoveries are generally high. No significant sample loss was recorded with a corresponding increase in gold present. Sample bias is not anticipated, and no preferential loss/gain of grade material was noted.

Drill Spacing and Orientation

Initial exploration by Gascoyne was targeting discrete areas that may host mineralisation. Consequently resource drilling pre-2018 was not grid based. However, when viewed with historical data, the drill holes lie on existing grid lines and within 25m - 100m of an existing hole.

RDV drilling in most of the Dalgaranga Project areas is nominally at a 25m – 40m spacing, but becomes less dense at depth.

GC drilling has been to test areas of modelled resources and is generally at a spacing of 10m x 7.5m.

The RDV drill spacing in unmined volumes is sufficiently dense in areas where relatively long range mineralisation continuity has been demonstrated, the best examples of this being the Main Porphyry Zone at Gilbey's (previously mined by Equigold) and at Sly Fox. Peripheral zones at Gilbey's, such as the Gilbey's Eastern Cutback, Gilbey's Far North, Gilbey's Starter Pit and Gilbey's South areas, have been proven by GC drilling to be much more discontinuous, and therefore difficult to model with high confidence using RDV data only. However, the mineralised zones have sufficient continuity in both geology and grade to be considered appropriate for the Mineral Resource and Ore Reserve estimation procedures and classification categories specified under the 2012 JORC Code.

The majority of drill holes have a dip of -60° towards local grid east. One program of 10m x 10m spaced holes in early 2018 tested an alternative drilling direction of -60° towards local grid southeast, however the change was not seen as an improvement and all subsequent drilling has been towards local grid east at the Gilbey's deposit and the Plymouth deposit, where local grid north – south striking mineralisation predominates. For the east – west striking Sly Fox and Gilbey's South deposits, holes are appropriately oriented towards local grid south.

The vast majority of the drill holes used are thus considered to be oriented near-optimally for intersection of gold mineralisation structures, ruling out any material bias due to drill orientation.

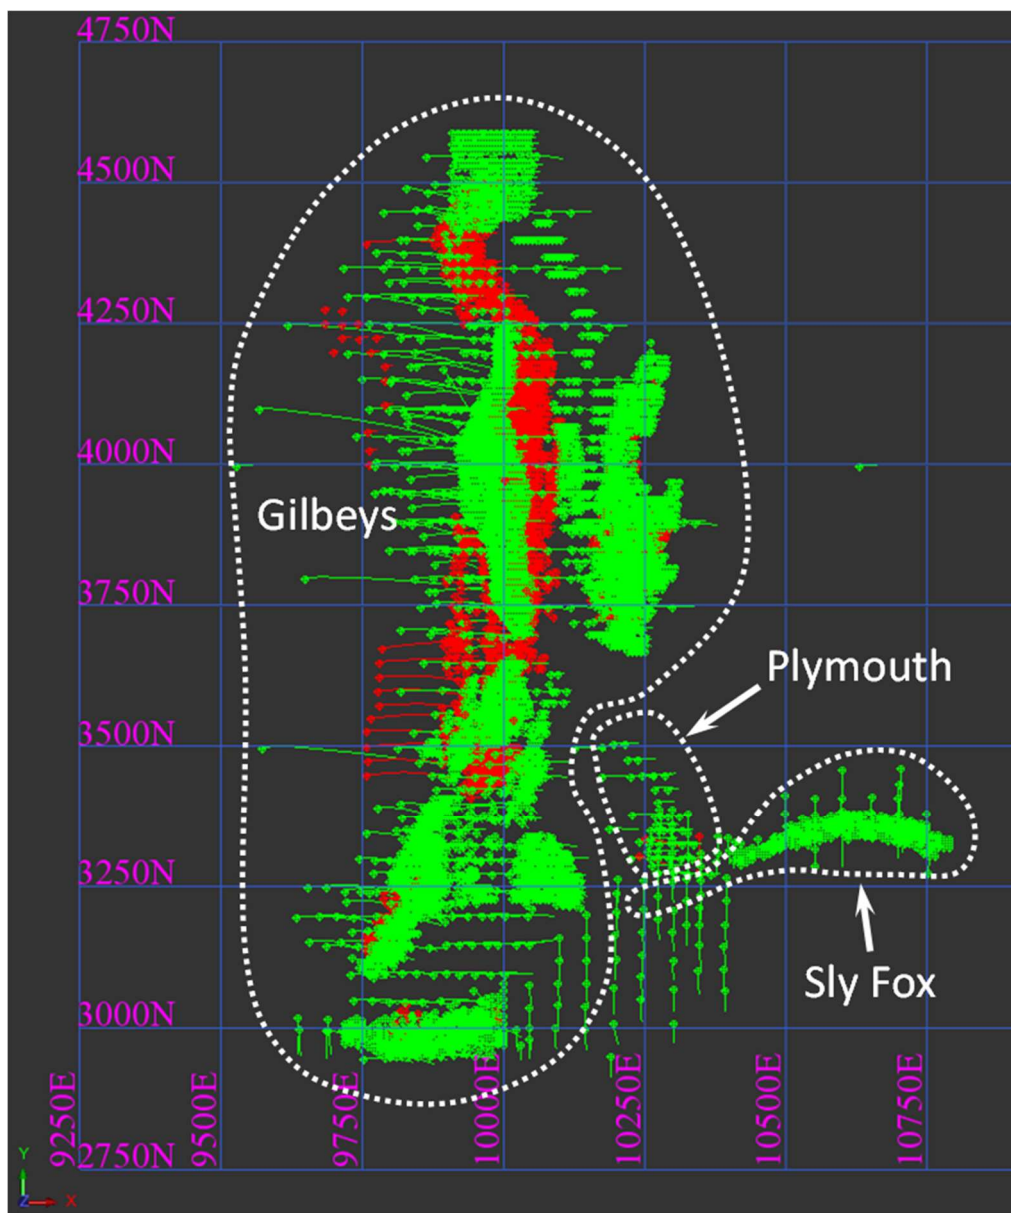


Figure 11: Plan view, in local grid, of holes used during the previous and update gold grade estimates. Green = holes used both previously and in this update; red = new holes not used previously but included in update estimate.

Sample Security

No information is available concerning sample security procedures for historical drilling.

For Gascoyne era sampling, the chain of custody is managed by Gascoyne:

- RC samples collected pre-2018 were delivered daily to the Toll depot in Mt Magnet by Gascoyne personnel.
- Toll delivered the samples directly to the assay laboratory in Perth. In some cases, Company personnel have delivered the samples directly to the laboratory.
- DD core was transported directly to Perth for cutting and dispatched to the assay laboratory for analysis.
- 2018-2020 grade control samples and 2020 deep RC resource drilling samples are collected immediately as drilled and stored in a designated area at the Dalgaranga mine site administration office.
- They are stored in closed bulk bags, numbered and ordered ready for transport. To ready the bulk bags for transport they are strapped to pallets, limiting the chance to tamper with sample bags during transport.
- The samples are sent once or twice weekly directly to MinAnalytical Laboratory via the Company's preferred transport provider.
- Consignments are specific to Gascoyne, thereby limiting potential security issues.

Analytical Methods

No information is available in the database for historical sample analysis.

Gascoyne Analyses

Prior to 2017, RDV samples sent to MinAnalytical were analysed by Fire Assay, using a 25g charge, with an AAS finish. Subsequent to this, all DD and RC samples were analysed by Fire Assay, using a 50g charge, with AAS finish.

The GC RC samples sent to MinAnalytical after mid-2018 were analysed by Photon Assay. This method involves the bombardment of the 250-500g charge with high energy X-Rays, leading to excitation of atomic nuclei and the consequent release of elemental signature gamma-rays, which are measured for gold content. It is a non-destructive method. GCY has undertaken comparisons to Fire Assay results on duplicate samples and this has shown that the Photon method, while being somewhat less precise at lower gold grades, is unbiased. Precision is observed to increase with gold grade.

The GC RC samples sent to the Dalgaranga Mine Site Laboratory for PAL analysis were analysed by the PAL1000 for 65 minutes. A 100ml of solution is collected and centrifuged. A 10ml aliquot is then collected and assayed for gold by AAS technique. The PAL method is considered to be a partial recovery method, but comparisons to Fire Assay at Dalgaranga show that recovery is very high, with a non-material difference being evident.

The AC samples were analysed by Aqua Regia dissolution of a 25g charge, with an AAS finish. This method is considered to be a partial method. Aqua Regia can digest many different mineral types including most oxides, sulphides and carbonates but will not totally digest refractory or silicate minerals.

Quality Assurance and Quality Control

Primary assay data total 194,657 AC, RC and DD samples, which include 8,084 CRMs, 2,986 Blanks, and 4,393 Field Duplicates, were reviewed.

The quality of the assay data was assessed by analysing the Certified Reference Material (CRM or Standards) and duplicate samples in terms of accuracy and precision. The precision analysis determines how closely the results can be repeated, while the accuracy analysis determines how similar the results are to the reported CRM value.

Mineral Resource Estimation Methodology;

- Two estimation/interpolation approaches were used for gold grade.
- The first method used was Localised Uniform Conditioning (LUC), which is a non-linear method developed specifically for the estimation of the grade distribution for blocks that are small relative to the available data spacing (i.e. Selective Mining Unit (SMU) sized blocks). LUC is able to produce SMU scale block grade estimates

that are not over-smoothed. Over-smoothing is a problem that has long been recognised when using standard linear methods such as OK for positively skewed and highly variable gold grade distributions, where the data spacing is relatively wide. The Dalgaranga gold grade distributions are universally positively skewed and highly variable.

- The second method used was OK, but only in the volume covered by GC drilling (10m x 7.5m spacing). The use of a linear estimate in areas informed by such dense data is considered to be appropriate.
- Fifteen broad mineralisation domains were interpreted for LUC gold interpolation using Surpac 6.7.3 software. An additional mineralised waste 'halo' domain was also defined surrounding the fifteen domains, out to the limit of drilling, in order to provide a representation of gold grade for future exploration and infill drill targeting purposes.
- Six LUC domains were defined on the north-south limb of the anticline, corresponding roughly to the porphyry-shale-mafic lithological zone (Domain codes 100 through 105). Domains 101 and 102 represent the Gilbey's Main Zone (GMZ), and encapsulates the most continuous, abundant and voluminous mineralisation. Domain 100 is situated within the Main Porphyry Zone, but is of lesser grade tenor and is characterised by narrow, less continuous oblique structural control. Domain 103 is to the north of Domains 100 to 102 and represents a less continuous zone of mineralisation that has been displaced to the west by a cross-cutting fault. Domain 104 is south of Domains 100 to 102, and encapsulates a near-surface zone of mineralisation that is situated close to the fold hinge zone. Domain 105 is a small, currently sparsely defined zone of higher grade mineralisation in the footwall of the GMZ. These domains were the primary target of historical Equigold mining. GNT has only recently begun to access the GMZ domains, which will underpin the bulk of gold production into the future – See Figures 2-4 and Table 4 for domain descriptions.
- LUC Domains 201 and 202 represent a relatively narrow band of westerly dipping mineralisation in the hangingwall (i.e. to the west) of the Main Porphyry Zone. This structure is oblique to the GMZ and gradually approaches it to the north, where it eventually merges with the GMZ mineralisation.
- LUC Domains 401 and 402 represent NNE-SSW striking diffuse and discontinuous mineralisation in the footwall (i.e. to the east) of the Main Porphyry Zone. These domains have recently been mined by GNT in the Gilbey's Eastern cutback.
- LUC Domains 501 and 502 are situated at the far southern end of the project area, and encompass erratic and discontinuous mineralisation situated within the east – west striking limb of the anticline to the immediate south of the Main Porphyry Zone. These domains have recently been mined by GNT in the stand-alone Gilbey's South pit.
- LUC Domain 601 represents the Plymouth deposit, which is situated at the western end of Sly Fox, but strikes north – south, and appears to be a southern extension to the Domain 401 and 402 footwall mineralisation. Plymouth is also characterised by erratic and discontinuous gold mineralisation and has not been mined to date.
- LUC Domain 701 represents the Sly Fox mineralisation envelope, which strikes east – west on local grid.
- The mineralised waste 'halo' LUC domain has been designated Domain 900.
- In addition to the aforementioned geological associations, the LUC domain boundaries were designed so as to capture very broadly the main mineralisation trends and settings. A very high tolerance for incorporation of internal waste was therefore applied. Where possible, a nominal grade cut-off of 0.2g/t Au was employed, but, especially in the more erratic peripheral zones, the boundaries were often defined at a lower grade, in order to ensure that all the potential mineralisation was captured in a sensibly continuous shape, while at the same time ensuring that the relatively depleted near-surface pallid zone was excluded (unless assay data showed otherwise) and while limiting the extrapolation of volume beyond the available drill data.
- The domains for OK estimation in the GC volume were defined by intersecting the volume covered by the GC drilling with the estimation domains discussed above.

- Gold grade composites were produced to equalise sample support using the 'best-fit' method in Surpac 6.7.3, with a target length of 1m.
- Gold grade caps were selected per domain, with due consideration given to the robustness of the upper tail of the gold distribution and the spatial continuity within the domain.
- LUC estimation was undertaken using an initial 'Panel' block size of 15mE x 15mN x 5mRL (local grid). The E and N dimension were chosen based on a nominal RDV drill spacing of between 25m and 30m in most areas. The vertical Panel dimension was set at double the current flitch height of 2.5mRL, and is supported by the dense 1m composite data in the downhole direction. The ultimate SMU estimation block size for the LUC was set at 5mE x 5mN x 2.5mRL, in order to reflect the current view on practical mining selectivity, with the vertical dimension matched to the flitch height. Equal E and N dimensions were selected for the blocks since the block model represents a mix of north – south and east – west striking ore bodies on the local grid.
- The master Surpac block model was designed with a 5mE x 5mN x 2.5mRL parent block size, with allowance for sub-blocks down to 2.5mE x 2.5mN x 1.25mRL for accurate volume definition.
- Gold grade variogram models were undertaken for all LUC and OK GC domains by transforming the composite data to Gaussian space, modelling a Gaussian variogram, and then back-transforming the Gaussian models to real space for use in interpolation. This transformation method de-skews the gold data and thereby enhances the detection of the true underlying spatial structure. All available valid RDV and GC composites were used for variography, thus ensuring the best possible definition at short ranges.
- LUC estimation was undertaken initially using just RDV data as input. During a series of trial LUC runs, it was realised that the use of standard capping and search parameters was unable to account for the reduced grade observed in some of the more erratic and discontinuously mineralised areas once GC drilling was undertaken. The RDV data only LUC runs were therefore compared to the OK GC models within the various GC volumes. Distance limiting above a specified grade threshold was applied to the Panel estimate in the LUC workflow, in order to inhibit the propagation of high grade composites in the estimation. The distance limiting thresholds were picked by identifying inflexions in the gold grade distribution and distance limits were based largely on the practical range of the relevant gold grade variograms. The practical range is defined as being the distance at which the variogram reaches between 80% and 90% of the sill value. The distance limiting parameters are believed to reflect the reality that some parts of the Dalgara Project are characterised by high grade continuity that is significantly less than the RDV drill spacing. This exercise thus serves the important purpose of 'calibrating' the forward-looking part of the Mineral Resource model, which is informed primarily by relatively wide spaced RDV data, by reference to the densely sampled GC volume. The distance limiting parameters defined by this exercise were utilised in the final LUC runs, which used all available valid data (i.e. RDV + GC).
- LUC estimation commenced with the large Panel block estimates, which is undertaken using OK. This was followed by a Change of Support (CoS) step, which uses the composite gold grade distribution and variogram model to define a gold grade distribution at the SMU block scale. An Information Effect correction, which accounts for the imperfect predictions that dense GC data will produce, was modelled as part of the CoS, assuming a GC drill spacing of 8mX x 10mY x 1mRL. Uniform Conditioning (UC) was then undertaken to produce a model of the SMU block grade, tonnage and metal distribution within each Panel, which is conditioned to the Panel grade. The resulting array variables for a range of cut-off grades is stored in the Panel block model. Finally, LUC is undertaken whereby the UC SMU block grade distribution stored in the Panel model is devolved to the SMU block model via a discretization post-processing procedure, thus resulting in a single grade value per SMU block.
- Search radius parameters for the LUC process were based on the anisotropy evident in the variograms, and by visual inspection of the pattern of informing composite selection. Discoidal shaped searches were used throughout, with major and semi-major axes radii being equal to each other and four times longer than the minor axis search radius. Anisotropic composite selection was activated, whereby the distance to a sample is considered to be a proportion of the distance to the ellipsoid surface. In addition, four quadrants were used in the search, with a maximum limit set for the number of allowable composites for each quadrant, in order to limit the number of samples selected from a single hole. Minimum (8) and maximum (20) numbers of allowable samples were selected based on Quantitative Kriging Neighbourhood Analysis. The use and method of selection of distance limiting parameters for some domains has already been discussed above. Only a single estimation pass was

implemented to avoid the production of artefacts at pass boundaries, which are undesirable, especially for non-linear estimation, where the effect of such artefacts can be amplified during the CoS step.

- OK GC estimation was undertaken using both the RDV and GC data. The estimation block size used was the chosen SMU size of 5mE x 5mN x 2.5mRL, with any SMU block having at least one sub-block falling within the wireframes being tagged for estimation.
- Search radius parameters for the OK GC process were based on the anisotropy evident in the variograms, and by visual inspection of the pattern of informing composite selection. Discoidal shaped searches were used throughout, with major and semi-major axes radii being equal to each other and four times longer than the minor axis search radius. Anisotropic composite selection was activated, whereby the distance to a sample is considered to be a proportion of the distance to the ellipsoid surface. In addition, four quadrants were used in the search, with a maximum limit set for the number of allowable composites for each quadrant, in order to limit the number of samples selected from a single hole. A minimum of 2 and maximum of 12 samples were allowed for estimation. No distance limiting parameters were applied.
- In the case of both the LUC and OK GC estimation, locally varying rotations were used for both the variogram model and search neighbourhood. These were based on interpreted surfaces that reflect the plane of maximum continuity of the gold mineralisation within each domain. The major and semi-major axes of the variograms and searches were thus oriented parallel to these planes.
- The OK GC model was merged with LUC model by volume weighting into the SMU blocks. The OK GC and LUC estimates were first devolved to sub-block level (2.5m x 2.5m x 1.25m). The OK GC and LUC sub-block grades were then re-blocked back to the 5m x 5m x 2.5m SMU block size, combining the two estimates at the juncture of the two zones using the volume proportions derived from the corresponding number of sub-blocks for each.
- Isatis v2018 was used to undertake the LUC and OK GC estimation, with the results being imported into the master Surpac block model.
- No variables other than gold grade were interpolated.
- The gold model was validated by comparison of global composite means and block estimate means. Swath plots by northing and elevation slice were generated to compare composite grades to estimated block grades at the semi-local scale. In those areas where distance limiting was applied during interpolation, the global and semi-local checks reveal that the mean estimated gold grade is somewhat lower than the composite means, as would be expected, but the estimated grade fluctuations are observed to mirror those of the input composites. Agreement between composites and block estimates was generally observed to be good. Visual checks of the block estimates against the raw assay data were undertaken, with good local agreement being observed. A check Inverse Distance Squared estimate, with distance limiting parameters identical to those used in the LUC process, was also compared and agreed well with the primary estimates.
- Wherever feasible, the estimated Mineral Resource was compared to mining and production data. The production data from the Equigold mining period are considered to be the most definitive, since they involve little or no mixing of sources. A nominal 0.7g/t Au cut-off was used during the Equigold mining with actual total production from the historical pit reported as 4.39Mt at 1.54g/t Au for 217.8koz Au. The Mineral Resource was reported within the historical Equigold pit volume, predicting 4.48Mt at 1.53g/t Au for 220.1koz Au. The tonnes and gold metal therefore agree to within a margin of approximately 2%. The production data were also compared to the Mineral Resource model on a 10m elevation slice basis and, with a few exceptions, the agreement is observed to be close. The Equigold pit primarily targeted the Gilbey's Main Porphyry Zone, represented largely by Domains 100, 101 & 102 in this Mineral Resource estimate, with a lesser contribution from the hangingwall lode represented by Domain 202.

Oxidation/weathering state was assigned using the relevant wireframe solid and surface models.

Some 434 density measurements from sample collected at Gilbey's were available for density estimation. Density is measured using the water immersion technique. Moisture is accounted for in the measuring process and

measurements were separated for lithology, mineralisation and weathering. It is assumed there are minimal void spaces in the rocks within the Gilbey's deposit. Values applied in the Gilbey's block model are similar to other known bulk densities from similar geological terrains. Previously, density values of 1.8, 2.0, 2.4 and 2.8t/m³ were assigned respectively to alluvium/dumps, the oxide zone, the transitional zone and the fresh zone. The only slight revision to these assigned values in this update was to the transitional zone, where a density of 2.5t/m³ has now been assigned.

The block model was depleted using surfaces representing pre-mining topography and the topography inclusive of surface mining as at the end of 30 April 2020.

The Criteria used for classification, including drill and data spacing and distribution

The Mineral Resource has been classified and reported in accordance with the 2012 JORC Australasian Code for Reporting of Mineral Resources and Ore Reserves (JORC Code). The Dalgaranga mineralisation is sufficiently drilled to allow classification as Measured, Indicated or Inferred (Table 1).

The following points are considered to be material in the classification of the Dalgaranga Mineral Resource:

- Geological interpretation – The current geological interpretations including mineralisation, structure, weathering, and lithology are considered the best possible with available information.
- At the Gilbey's Main Porphyry Zone (Domains 100, 101 & 102), the Measured Mineral Resource was defined within areas of grade control drilling. The Indicated Mineral Resource was defined within areas of close spaced diamond and RC drilling of less than 40m x 40m, and where the continuity and predictability of the lode positions was considered to be good. The Inferred Mineral Resource was assigned to areas where drill hole spacing was greater than 40m by 40m, where mineralisation continuity can only be assumed.
- In the Sly Fox, Plymouth, Gilbey's East, Gilbey's North, Gilbey's South and Gilbey's Starter Pit areas no Measured Mineral Resources were defined. The high level of geological complexity, relatively limited geological and mineralisation continuity and low sample precision precluded classification at the Measured level of confidence. Indicated Mineral Resources were defined in areas of dense 10m x 7.5m GC drilling, except for Sly Fox, where Indicated Resources were defined where drill spacing was less than 40m x 40m. The Inferred Mineral Resource was assigned to areas outside of the GC volume, which are informed only by relatively wide spaced RDV drill holes.
- The input data is comprehensive in its coverage of the mineralisation in most areas and does not favour or misrepresent in-situ mineralisation. The model has been confirmed by infill and GC drilling, which supported the interpretation. Validation of the block model shows good correlation of the input data to the estimated grades.

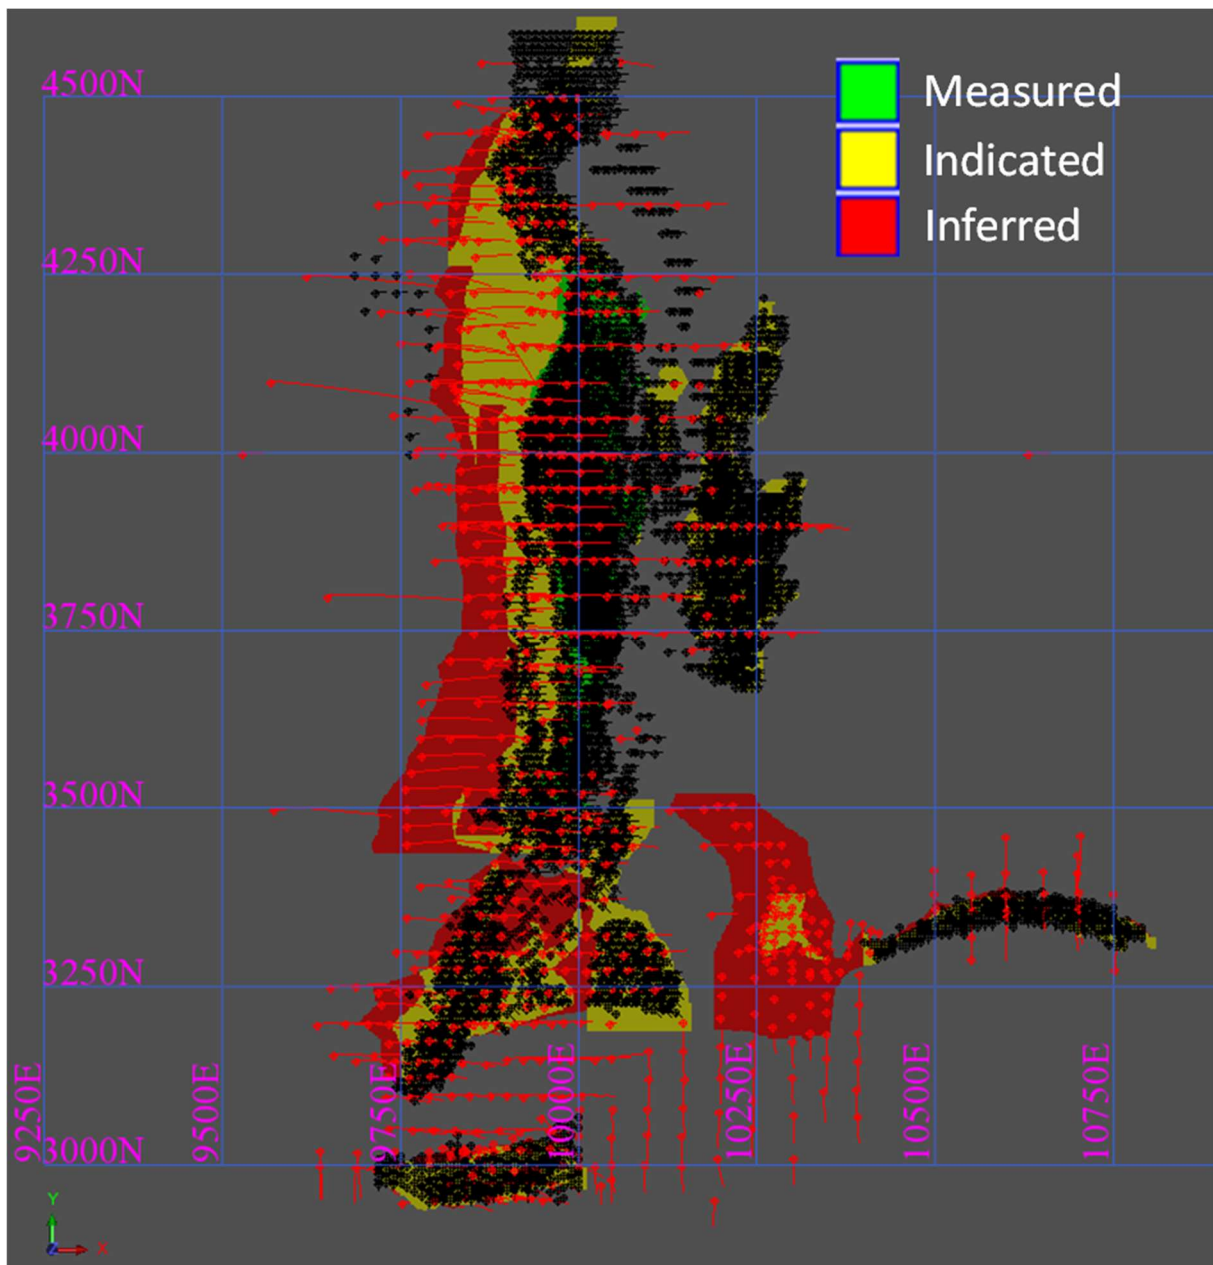


Figure 12: Dalgaranga classification plan view – depleted, showing non-halo domains.
Black traces = GC holes; Red traces = RDV holes.

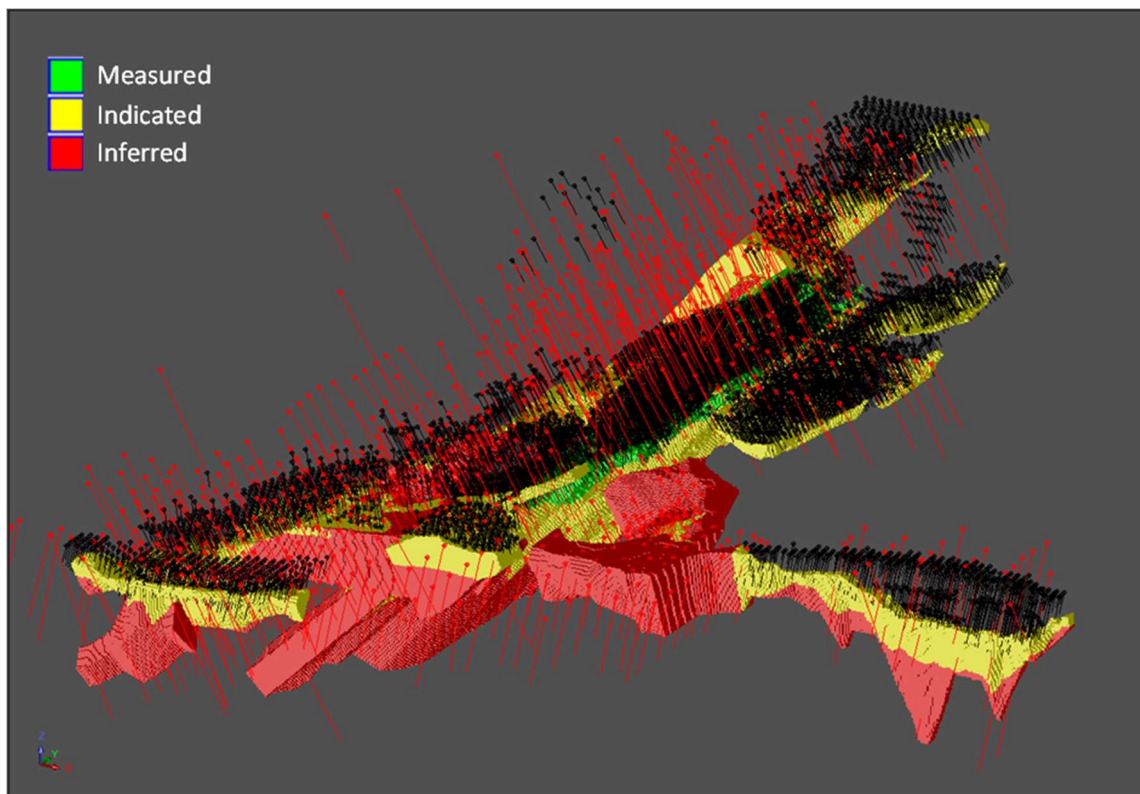


Figure 13: Dalgara classification isometric view looking towards the northwest (local grid) – depleted, showing non-halo domains. Black traces = GC holes; Red traces = RDV holes.

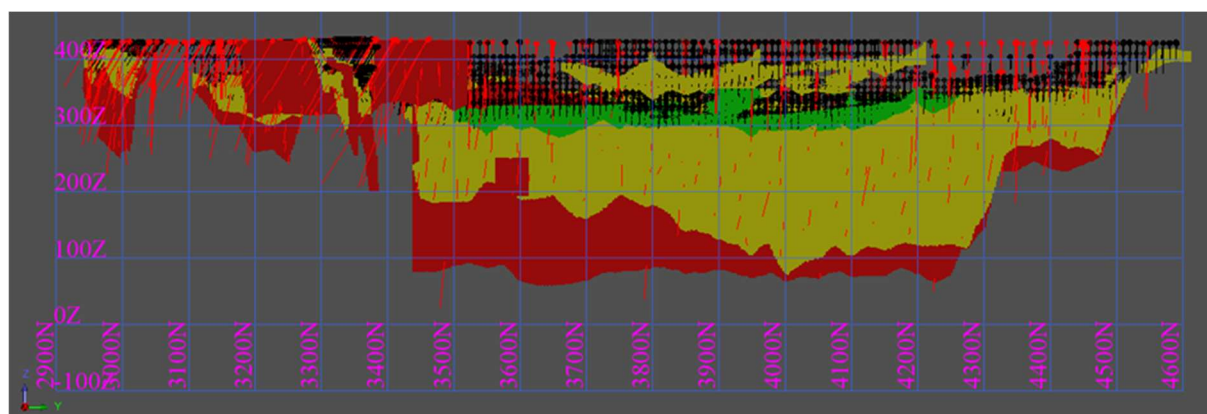


Figure 14: Dalgara classification long section view looking towards the west (local grid) – depleted, showing non-halo domains. Black traces = GC holes; Red traces = RDV holes.

Mining and Metallurgical Methods and Parameters, and other material modifying factors considered to date

The Gilbey's deposit was previously mined as an open pit in the period 1996 to 2000, and the current phase of mining involves extending and deepening the existing open pit.

Metallurgical test work was conducted on the Gilbey's deposit by Equigold prior to mining of the deposit from 1996 to 2000. Gascoyne has access to extensive reconciliation records from that period of operation. The remaining mineralisation has the same characteristics as the mined material. Further metallurgical test work was conducted on samples obtained from Gascoyne surface drilling, from each material type at the Gilbey's deposit as part of Dalgara Gold Project Feasibility Study (ASX release on 25th November 2016). Mill Production Sampling has shown that gold recovery is currently averaging >90% over the last six months. Black (carbonaceous) shales occurring within the mineralised sequence are known to result in lower recoveries. The black shales have been modelled using implicit methods (Leapfrog) and were flagged into the block model. A gold recovery of 77% is currently in use, which is at the lower end of metallurgical test work that was undertaken on black shale material.

Appendix 2

Listing Rule 5.8.1

Pursuant to ASX listing rule 5.8.1, and in addition to the information contained in Appendix 3, the Company provides the following in respect of the 2019 Dalgaranga Resource update for the Golden Wings Mineral Resource estimate:

Notes on Golden Wings Deposits and Mineral Resource Estimate

Dalgaranga Deposit Geology and Geological interpretation;

Regional Geology

The Dalgaranga Gold Project occurs within the Dalgaranga Greenstone Belt in the Murchison Province of Western Australia). The northeast trending belt consists of high magnesium basalt, tholeiitic basalt, intermediate volcanic, felsic intrusive porphyry, and a volcano-sedimentary sequence dominated by black shale and volcanoclastic lithologies. Felsic volcanic rocks outcrop on the western side of the belt, north of the Gilbey's and Golden Wings deposits. The Greenstone sequence is intruded by large gabbro complexes in the north (Mt Farmer, Mt Charles) and to the west (Dalgaranga Hill). The stratigraphy has been folded into two regional synforms which plunge in opposite directions, separated by a regional fault/shear along the western side of the Mt Farmer gabbro sill, westwards to the south side of the gabbroic Dalgaranga Hill. The Dalgaranga Greenstone Belt is intruded by a number of post-tectonic granites separated by zones of amphibolite and mafic schists intruded by pegmatites. East-west trending Proterozoic dykes of dolerite and gabbro intrude the Greenstone sequences.

Geophysical interpretation of the region shows large scale northeast structures and a general fabric also oriented northeast. The fabric and structures cross cut folded stratigraphy and are synonymous with regional mineralised corridors.

Golden Wings

The Golden Wings deposit lies on the south eastern side of the Dalgaranga Greenstone belt some 4km north of the Gilbey's deposit (Figure 17).

The overlying laterites at Golden Wings are gold enriched and were subject to some mining by Equigold, the pisolitic horizon is some 3-10m thick with patchy gold grades. Gascoyne mined the remnant gold rich laterites when mining recommenced in 2018.

The host rocks for the oxide and primary gold lodes at Golden Wings consist of a sequence of high magnesium basalts, basalt and interflow sediments (black shales) and minor porphyries. Quartz gabbro occurs on the northern side of the deposit. These rock units have been sheared to form quartz biotite chlorite schists, with the strike of the geology interpreted to be east-west in a broad shear zone. A well-developed weathering profile occurs at Golden Wings; at surface a mixed hardpan residual pisolitic laterite horizon occurs which is up to 10m thick, below which residual mottled and saprolitic clay zones are developed, in places strong oxidation occurs to a depth of 80m or more.

The deposit has a complex deformation history. As outlined by Davis (2019) there are five recognised deformation events (Figure 15). The D1 event, present as an east-west striking zone of subvertical cleavage, is the primary directional control on the Golden Wings mineralisation. The D1 strain zone has been subsequently folded to form two distinct structural domains; one in the north of the open pit and one in the south.

Event	Description	Notes
D ₁	E-W-striking and subvertical cleavage and high strain zones. Axial planar to regional fold south of Gilbey's	- Primary host structure at Golden Wings. - A major gold hosting structure at Gilbey's. Precise role yet to be defined.
D ₂	Northwest-striking, subvertical crenulation and localised high strain zones.	- No identifiable influence at Golden Wings. - Spatial association with gold deposits in Gilbey's and Sly Fox but precise mechanism not yet defined.
D ₃	Northeast-striking subvertical crenulation cleavage and high strain zones.	- Main foliation at Golden Wings. Folding of D₁ high strain zone in D₃ likely produced geometric perturbations that localised gold mineralisation in D₅. Kinematics of mineralisation likely involved reactivation of S₃ shear bands inside the D₁ high strain zone that is the primary host structure to the gold deposit. - Present at Gilbey's and probably of local importance to internal shoots though not defined yet. May have similar significance in the east half of the deposit to as at Golden Wings.
D ₄	Sub horizontal high strain zones and crenulation cleavage.	At both deposits there is evidence of a local control on mineralisation reflected in sub horizontal gold trends.
D ₅	North-south-striking subvertical crenulation cleavage and spaced high strain zones.	- Same time as gold mineralisation. Clear associations at Golden Wings. - Spatial association with gold at Gilbey's identified at the scale of tens of metres so far.

Figure 15: Description of key structural geology events (After Davis, 2019)

The mineralisation shows a correlation to the structural framework of the deposit, thickening and thinning in response to the various strain zones developed in the rock mass. This has led to multiple higher-grade shoots, primarily at the intersection of S₁ and other foliations at Golden Wings.

Drilling and Sampling, and Sample Analysis Techniques;

Historic Drill Data

Exploration and production from the Golden Wings mineralisation dates back to the mid-1990's. Therefore, the geology database includes results from companies and activities before Gascoyne gained possession of the tenement. Of the 2,294 drill holes recorded in the Golden Wings database, 552 are identified as non-Gascoyne data. The vast majority of these 552 holes are either RAB (113) or 'LAT' (354) and only 81 are either diamond drill holes (1) or reverse circulation holes (80).

All RAB, 'LAT' and aircore (AC) holes have been excluded from the 2020 resource estimate. SD2's decision to exclude RAB, 'LAT' and AC drill holes is based on the potential sample quality associated with these drilling and sampling methods combined with the additional drill coverage provided by Gascoyne's more recent drilling programs.

Of the 81 RC and DDH drilled by companies prior to Gascoyne, 37 were excluded on the advice of Gascoyne. The remaining 44 are usually the deepest/longest on the drill section and have a greater influence on the deeper parts of the resource. Of the 66 holes with data below 350m RL, 17 (~25%) are from this group of historical drilling.

Drilling and sampling of the pre-Gascoyne samples were by Newcrest and Equigold and followed standard industry practice as defined at the time of execution. Samples were collected from face-sampling bits in RC drilling with the drill chips collected in a cyclone prior to splitting in a riffle splitter. Nominal sample length is 1.0m with a final sample weight of between 2-3kg sent to the laboratory for analysis. Newcrest note some challenges with sampling wet, sticky clays and in these instances grab samples were collected from the drill cuttings.

Gascoyne Drill Data

There are 2,710 drill holes in the supplied Access database. Of these, 2,158 holes were drilled by Gascoyne. This total includes holes adjacent to but not intersecting the Golden Wings mineralisation. Forty-four holes were excluded by the Gascoyne geology team due either to unacceptable quality, lack of assay data, or holes superseded by more up to date grade control drilling. SD2 applied a further data filter, requiring all holes used in the estimate to have complete collar, down-hole survey and sampling data. After this filtering 2,061 holes remained in the database (58,301.75m) in the immediate area of the mineral resource.

One diamond drill hole was used in the resource estimate. The other holes were drilled by reverse circulation methods. RC drilling and sampling was by conventional 5½" face-sampling bit with samples collected in a cyclone prior to splitting. The cyclone sample was split using either a riffle or cone splitter to reduce sample mass to between 2.5 and 4kg. Field duplicates were collected as part of Gascoyne's quality management system.

RC drilling limits the precision of contact definition due to the sampling method. Of necessity, sample intervals are fixed a nominal 1.0m regardless of any geological contact. The nominal 1.0m has a relatively low precision, commonly ranging from 0.8m to 1.2m in Australian drilling operations due to sample hang-up and delimitation errors. This 1.0m fixed length impacts on the precision of the domain boundary, potentially impacting on the estimation of the grade-tonnage curve and is a factor to be considered in resource classification. In the absence of supporting diamond drilling data, a resource defined solely by RC samples is, in SD2's opinion unlikely to meet the requirements of being classified as a Measured Resource under the JORC Code.

The location of drill hole collars for all of the holes used in this estimate were surveyed by differential GPS (DGPS) to a precision of +/-1m. Coordinates were recorded in MGA94 Zone 50 grid and a calculated local mine grid. This estimate was completed in the MGA94 Zone 50 system.

The precision and accuracy drill hole collars are considered suitable for resource estimation. The collar coordinate precision is consistent with the sample length precision and SD2 considers the data fit-for-purpose.

For longer drill holes (greater than ~40m), the dip and dip-azimuth of the drill holes used in this estimate were recorded by a variety of methods. Prior to September 2016, 30m down-hole surveys were collected using an electronic multi-shot survey tool operated by the drilling contractors. Post September 2016 a Champ gyroscopic survey tool has been used. The change of survey methodology was prompted following an internal review by GNT which indicated the potential for magnetic minerals to interfere with the multi-shot tool. The Champ tool is operated by the drilling contractor and surveys from the bottom of the hole towards the top at 30m intervals with the final measurement taken within 3m or less to the collar.

The survey frequency for longer holes ranges between one reading every 12.5m to one reading every 50m with an average of one reading every 29m.

For shorter, grade control holes the planned (design) dip and azimuth were adopted (typically -60 towards 180 or vertical).

The survey methods and frequency adopted by Gascoyne are common industry practice and are reasonable for resource estimate. All resource and grade control drill holes are geologically logged using a standardised logging legend. The majority of drilling is reverse circulation and therefore the geological data is restricted to lithology and alteration with texture and structure largely destroyed by the drilling process. Holes are logged using the site's Geobank logging system and uploaded to the central geological database.

Gascoyne Analyses – Analytical Methods

Recent grade control drilling was analysed at Gascoyne's on-site laboratory using pulverise and leach (PAL).

Prior to 2020, Gascoyne's RC drill chips for both grade control and resource definition drilling were analysed in Perth at the NATA accredited facility owned and operated by Minanalytical Laboratories Pty Ltd (a division of the AusDrill Group). The analysis technique is PhotonAssay™, a relatively new analytical method developed by the Commonwealth Scientific and Industrial Research Organisation (CSIRO) and commercialised by Chrysos Corp.

Gascoyne's RC drill chips for both grade control (GC) and RDV were analysed in Perth at the NATA accredited facility owned and operated by Minanalytical Laboratories Pty Ltd. The analysis technique is PhotonAssay™, a relatively new analytical method developed by the Commonwealth Scientific and Industrial Research Organisation (CSIRO) and commercialised by Chrysos Corp.

PhotonAssay is based on gamma activation analysis (GAA). Samples are exposed to a high-energy X-ray source which causes excitation of the atomic nuclei in the sample. As the nuclei return to a non-excited state a gamma-ray signature is emitted. The nature and strength of this signature is used to calculate elemental gold grade. The technique is non-destructive and works directly on rock chips or drill core as well on pulverised samples.

The GC RC samples sent to the Dalgaranga Mine Site Laboratory for PAL analysis were analysed by the PAL1000 for 65 minutes. A 100ml of solution is collected and centrifuged. A 10ml aliquot is then collected and assayed for gold by AAS technique.

Quality Assurance and Quality Control

Data quality and assessment of the fit-for-purpose incorporates aspect of drilling, sampling, analysis and database management. SD2 reviewed procedures and outcomes and assessed quality performance based on data supplied by Gascoyne. This included the analytical performance of a range of different certified reference materials (CRMs) processed in batch with Gascoyne grade control samples.

Mineral Resource Estimation Methodology;

The Golden Wings resource was estimated by Localised Uniform Conditioning (LUC) using Datamine Software Studio RM. The mineralisation was constrained by a 3-dimensional volume developed by Indicator Kriging (IK) at a 0.25g/t Au threshold and contoured above a 35% probability of grade exceeding 0.25g/t Au (i.e., the 35% iso-surface of the 0.25g/t Au indicator Figure 16). This constraining envelope was selected based on evidence derived from open pit mining exposures, interpreted structural geological controls and as-mined grade control ore/waste boundaries.

For the IK estimation used to define the constraining volume, drill hole sample data was composited to a nominal 2.0m from the top of hole downwards. These composites were then transformed into binary indicators (0, 1) at the 0.25g/t threshold. Experimental variograms of this binary transform were used to develop indicator variogram models. The indicators were estimated via Ordinary Kriging using search parameters derived on the basis of the variogram model and the sample-to-block configuration. The resulting indicator estimate was then contoured in 3-dimensions using the iso-surfacing tools provided in Studio RM. These iso-surfaces were reviewed and modified to improve their correlation to the exposed (in pit) geology. The Golden Wings mineralisation style includes a high proportion of isolated gold intersections and several of these isolated intersections were not captured by the IK and iso-surface model. Intersections exceeding 2.0m at a grade greater than 0.5 g/t Au were incorporated into the mineralisation interpretation and given a restricted spatial zone of influence (derived from the variogram model) to prevent these intersections from adversely impacting on the quality of the estimate.

For the LUC grade estimation, samples were composited to a nominal 2.0m within the constraining volume. The frequency distribution of these 2.0m composites was examined and grade caps of 7 g/t (Domain 1001) and 17 g/t (Domain 1002) were applied. These caps reflect the point where the rate of change in the coefficient of variation (CV) stabilises as high-grade composites are sequentially removed from the population. The grade caps correspond to the 98.5% and 99.4% distribution respectively.

Experimental variograms were calculated for the two domains based on the 2.0m composites and variogram models were fitted to the experimental results. The variogram models have a moderate nugget effect (~36%); however, the slope near the origin is steep with more than 50% of the total variance occurring within the first 5m.

The LUC was estimated in four stages:

- An initial estimate of the panel grade (at a support of 10m x 5m x 5m) using Ordinary Kriging of the 2.0m composites;
- Subsequent Uniform Conditioning (UC) of the panel estimates to a selective mining unit (SMU) of 10m x 5m x 2.5m based on the dispersion variance of the panel estimate. The SMU was selected after discussions with Gascoyne and reflects the minimum volume likely to be marked out as an individual dig unit during grade control; The UC change-of-support was developed for grades ranging from 0.0g/t Au to 16.25g/t Au at 0.25g/t intervals;
- Development of an SMU support grade estimate to rank the SMU distribution within each panel. This estimate was by Ordinary Kriging using modified search parameters to reduce the smoothing and enhance the ranking outcome; and
- Allocation of SMU-support metal and grade to individual SMU blocks based on the panel UC grade-tonnage curve and the ranking estimate. This is the final 'localisation' step in an LUC estimate.

Bulk density was assigned to the estimate based on estimated oxidation state. Oxidation surfaces were derived from geological logging and are largely unchanged from the 2017 estimate. Bulk density ranges from 2.0 g/cm³ to 2.8 g/cm³. These values are based on the results of tests conducted at the nearby Gilbey's open pit during feasibility study and are supported by tonnage reconciliation performance against the ore treatment plant that is within +/- 3%.

The LUC estimate is a so-called 'recoverable resource' estimate. It incorporates an allowance for mining recovery as the SMU support of 10m x 5m x 2.5m (XYZ) assuming perfect selection (i.e., that every SMU-size block can be perfectly mined independently of the surrounding blocks.) The estimate does not include other factors that contribute to mining loss and dilution such as blast-associated mixing, dig block decisions and the physical interaction of mining equipment and the broken rock mass. The reporting cut-off grade is 0.3g/t Au and is based on economic studies completed by Gascoyne. It corresponds to the current (April 2020) mining cut-off grade for oxide material.

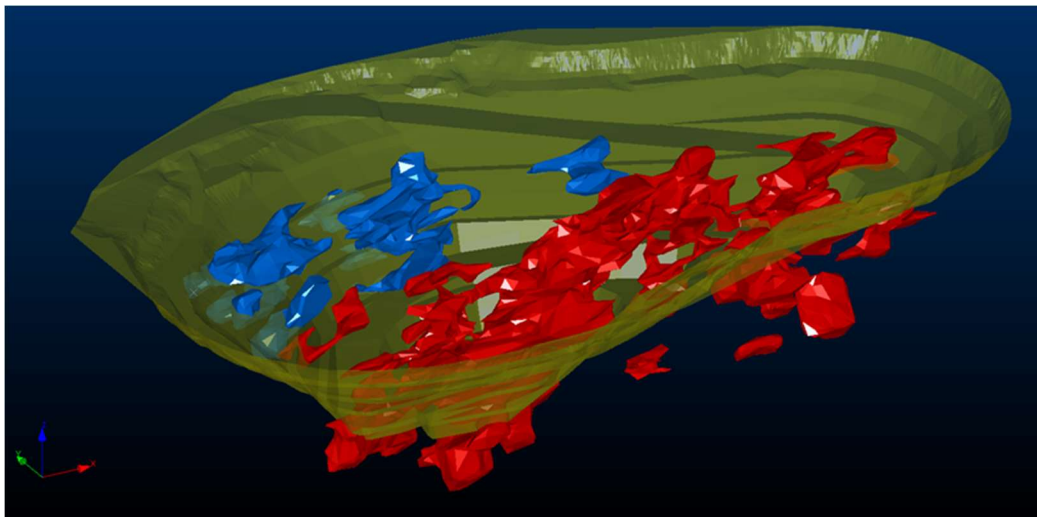


Figure 16: Golden Wings 0.25 gold grade indicator - 35% probability iso-surface

Criteria used for classification, including drill and data spacing and distribution

The resource is classified according to the JORC Code as Indicated Resource and Inferred Resource. There is no Measured Resource at Golden Wings. In classifying the resource SD2 considered:

- Sampling type, spacing and quality;
- Geological factors including the geological setting and mineralisation style;

- Database integrity;
- The relative dimensions of the mineralisation compared to the available data;
- Recent mining activities and operational performance; and
- Uncertainty associated with alternate, reasonable geological interpretations, variogram models and estimation parameters.

In SD2's opinion the data available for resource estimation is fit-for-purpose. No data quality or database integrity issues affected the resource classification. The main factor affecting the classification is the highly variable nature of both the geology and the grade distribution. This variability limits confidence in the resource estimate even after close-spaced grade control drilling. At best geological continuity can be assumed between points of observation, not confirmed. Therefore, the highest classification under the JORC Code is Indicated Resource.

To classify the resource SD2 investigated the local and average sample distribution. Initially this analysis involved determining the number of samples informing each block during estimation and the average distance of those samples. Blocks supported by more than 10 samples within eight meters were considered well informed. Blocks supported by more than 10 samples within 15m were considered less well informed. Blocks supported by less than 10 samples or where the average distance to the samples exceeded 15m were considered poorly informed.

Using this sample spacing analysis SD2 developed 3D surfaces separating the majority of well informed, less informed and poorly informed blocks. These surfaces partitioned the resource into Indicated, Inferred and Unclassified mineralisation. The Indicated-to-Inferred boundary largely lies along a horizontal plane at approximately 360m RL except for the centre of the pit where additional, deep drilling focused on the high-grade core allowed the boundary to be lowered to approximately 310m RL.

The mineral resource is classified using the guidelines published in the JORC Code (2012). This includes consideration of the geological setting and understanding of the controlling geological features, the quality and quantity of supporting data including drill holes, mapping and sampling and consideration of the likelihood of future economic extraction (the 'reasonable prospects test'). There is no Measured Resource. Indicated Resource refers to mineralisation where there are more than 10 samples within eight metres. This volume was defined by a surface that reflect the average drill hole spacing and corresponds to a horizontal plan at approximately 360m RL with a depth extension to 310m RL in the centre of the designed open pit where additional deep drilling exists. Inferred Resource corresponds to mineralisation where there are more than 10 samples within 15m. Mineralisation where there are fewer than 10 samples within 15m is unclassified and has not been reported.

Mining and Metallurgical Methods and Parameters, and other material modifying factors considered to date

Metallurgical recovery performance has been demonstrated by both the current mining operation and dedicated metallurgical sampling completed in 2013 and in 2016 (documented in Dalgaranga Gold Project Feasibility Study - ASX release on 25th November 2016)

Metallurgical recovery, based on current operational performance, is high, ranging from 93% to 95% with relatively low residence times (24 hours or less). Metallurgical performance is not considered an impediment to the potential economic viability at Golden Wings.

References.

Davis, T., 2019. A Review of the structural geology of the Golden Wings and Gilbey's gold deposits, Dalgaranga, Western Australia. Internal company report by Impel Geoscience.

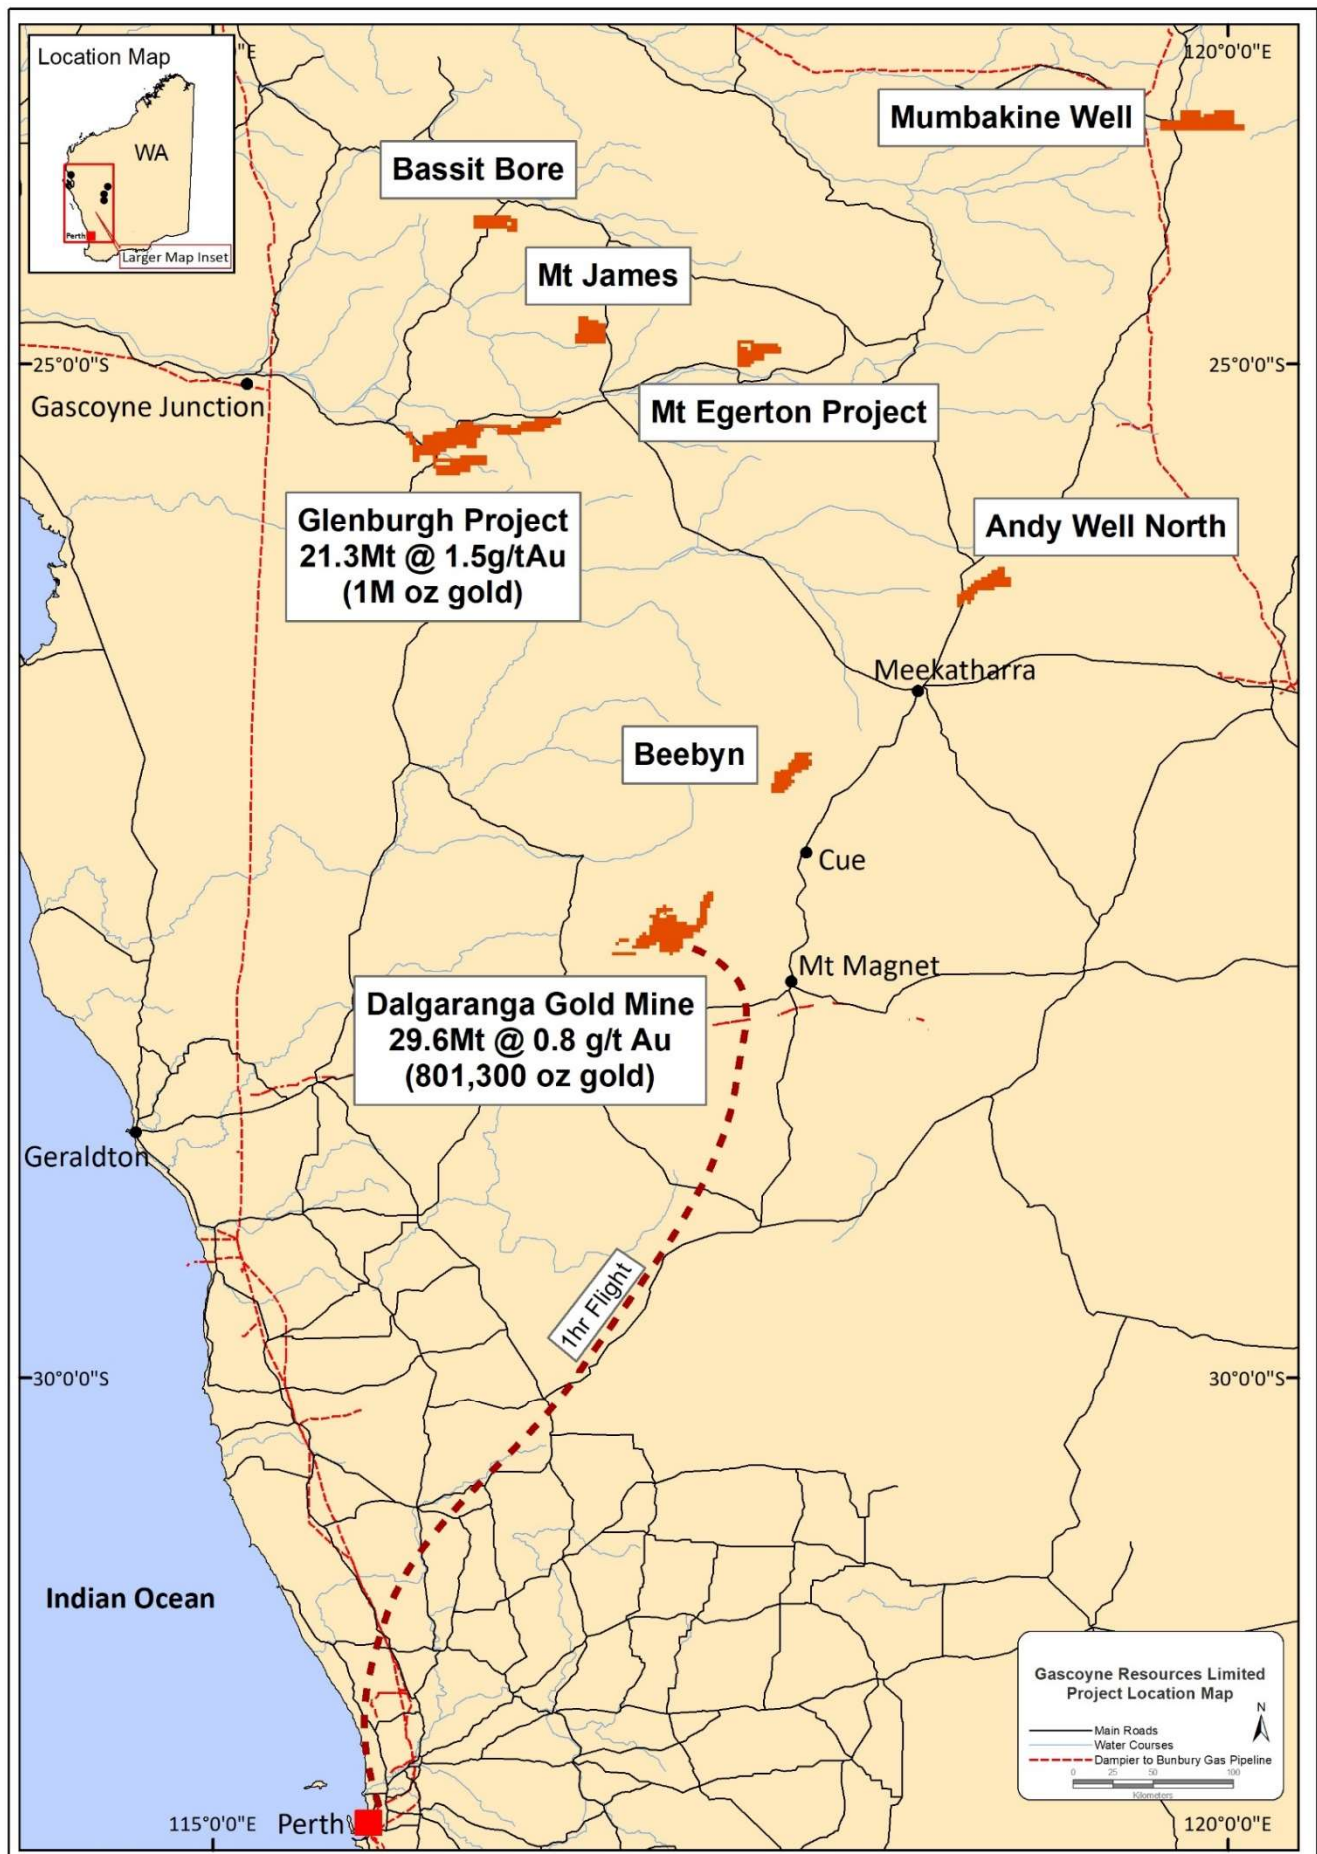


Figure 17: Project Locations in the Gascoyne and Murchison Regions

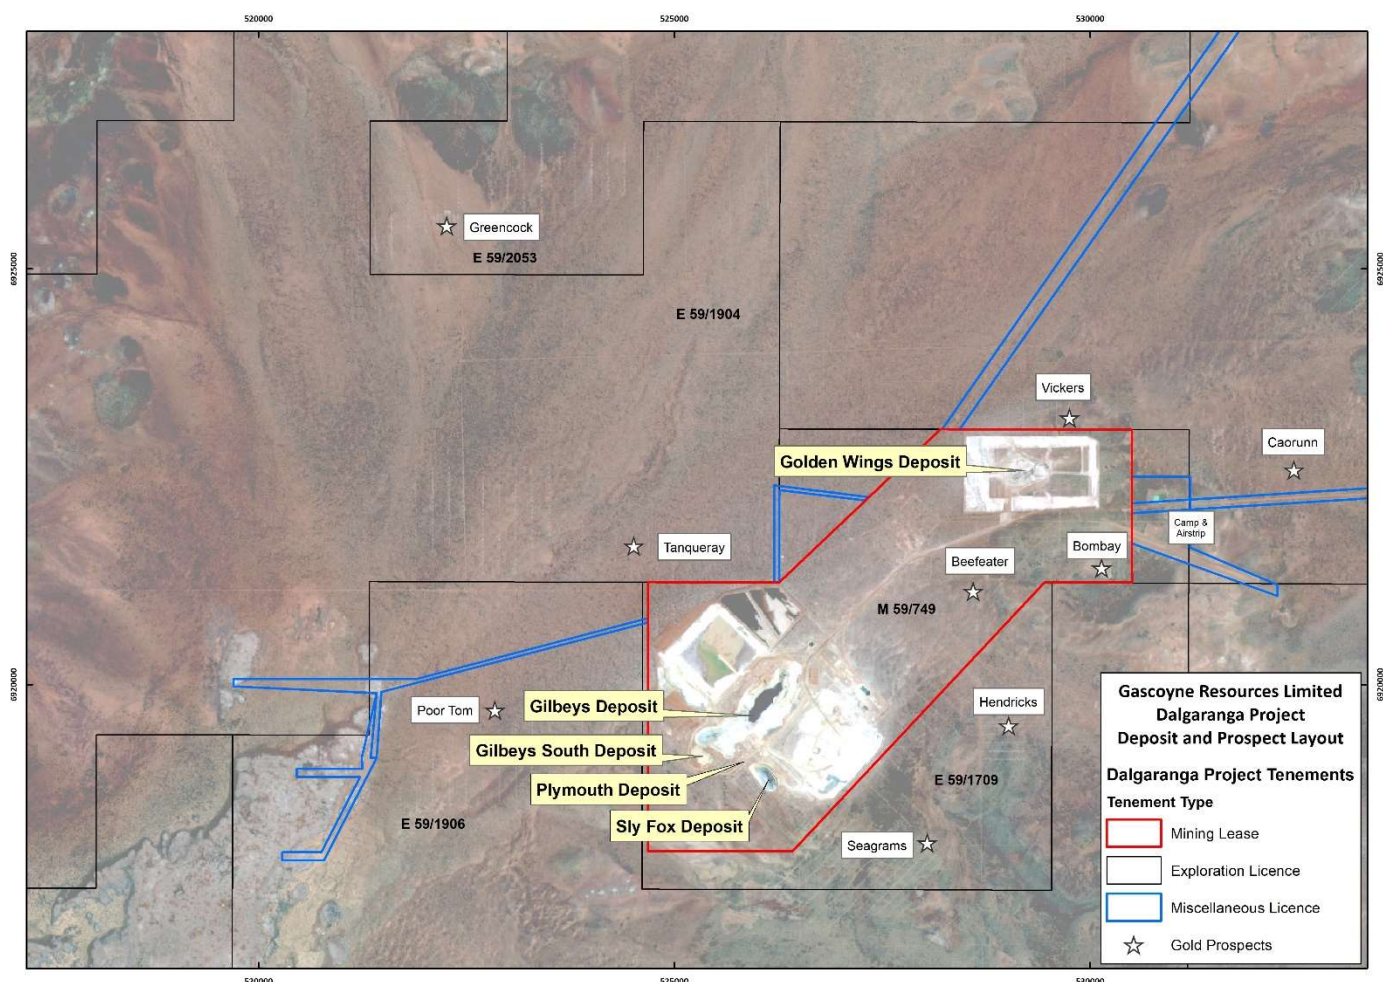


Figure 18: Dalgara Gold Project Deposit and Prospect Layout

On behalf of
Gascoyne Resources Limited

This announcement has been authorised by the Joint Administrators

Mike Ryan
Joint Administrator

For further information, please contact:

Media enquiries:

Shane Murphy
Strategic Communications
FTI Consulting
Ph: +61 8 9321 8533 / 0420 945 291
E: shane.murphy@fticonsulting.com

Creditor & Shareholder enquiries:

Gascoyne_enquiries@fticonsulting.com

BACKGROUND ON GASCOYNE RESOURCES

Gascoyne Resources Limited was listed on the ASX in December 2009 and is focused on exploration, development and production of a number of gold projects in Western Australia. The Company's 100% owned gold projects combined have over **1.8 million ounces of contained gold on granted Mining Leases**.

DALGARANGA:

The Dalgaranga Gold Project ("DGP") is located approximately 65km by road NW of Mt Magnet in the Murchison gold mining region of Western Australia and covers the majority of the Dalgaranga greenstone belt. After discovery in the early 1990's, the project was developed and from 1996 to 2000 produced 229,000 oz's of gold with reported cash costs of less than \$350/oz.

The Feasibility Study ("FS") completed on the DGP in November 2016 highlighted a robust development case for the Project based on the development of two open pits feeding a 2.5 Mtpa processing facility for production of around 100,000 ozpa for 6 years. As a result of the FS, the Company progressed through the funding, development and construction phases for the Project. Construction was completed ahead of schedule and under budget, with first gold poured in late May 2018.

An updated April 2020 Mineral Resource has been estimated (this announcement) with the Dalgaranga Gold Project Mineral Resource containing **29.62Mt @ 0.84 g/t gold for 801,300 ounces of gold** (Refer table 7).

The Ore Reserve Estimate was completed in October 2019 with the Dalgaranga Gold Project Ore Reserve containing 16.9Mt at 0.9 g/t for 502koz of contained gold (ASX Announcement 3 October 2019). Refer table 8.

An updated Ore Reserve and LOMP for Dalgaranga is being developed, based on the new LUC model reported here, focussing on accessing the Main Gilbey's zone as quickly as practicable, and optimising mining sequences and processing schedules to maximise value. This new Resource Model forms the basis for an updated Ore Reserve estimate expected in the coming weeks.

Significant exploration potential remains at Dalgaranga within the Company's extensive tenement holdings.

**Table 7 : Dalgaranga Gold Project
April 2020 Summary Mineral Resource Statement**

Classification	Mt	Au g/t	Au koz
Measured	1.65	0.75	39.7
Indicated	21.22	0.86	588.6
Measured + Indicated	22.87	0.85	628.3
Inferred	6.76	0.80	173.1
TOTAL	29.62	0.84	801.3

Note: Discrepancies in totals are a result of rounding

**Table 8: Dalgaranga Gold Project
30 June 2019 Summary Ore Reserve Statement**

Classification	Oxidation state	COG (g/t Au)	Mt	Au g/t	Au koz
Proved	Oxide	0.25	0.1	1.1	4.1
	Transition	0.30	0.4	0.9	11.0
	Fresh	0.32	0.9	0.8	22.4
	Stockpiles	0.25	0.0	0.5	2.6
	Gold In circuit				1.3
	SUBTOTAL		1.4	0.9	41.4
Probable	Oxide	0.25	0.7	0.8	19.2
	Transition	0.30	1.1	0.9	31.9
	Fresh	0.32	13.7	0.9	409.2
	SUBTOTAL		15.5	0.9	460.4
Total			16.9	0.9	501.8

GLENBURGH:

The Glenburgh Project in the Gascoyne region of Western Australia, has a Measured, Indicated and Inferred resource of: **21.3Mt @ 1.5 g/t Au for 1.0 million oz gold** from several prospects within a 20km long shear zone (see Table 9). (see ASX announcement dated 24 July 2014 and titled "High Grade Domains Identified Within Updated Glenburgh Gold Mineral Resource")

Table 9: Glenburgh Deposits - Area Summary

Mineral Resource Estimate (0.5 g/t Au Cut-off)

Area	Measured			Indicated			Inferred			Total		
	Tonnes Mt	Au g/t	Au Ounces	Tonnes Mt	Au g/t	Au Ounces	Tonnes Mt	Au g/t	Au Ounces	Tonnes Mt	Au g/t	Au Ounces
North East	0.2	4.0	31,000	1.4	2.1	94,000	3.3	1.7	178,000	4.9	1.9	303,000
Central	2.6	1.8	150,000	3.2	1.3	137,000	8.4	1.2	329,000	14.2	1.3	616,000
South West							2.2	1.2	84,000	2.2	1.2	84,000
Total	2.9	2.0	181,000	4.6	1.6	231,000	13.9	1.3	591,000	21.3	1.5	1,003,000

Note: Discrepancies in totals are a result of rounding

EGERTON:

The project includes the high grade Hibernian deposit and the high grade Gaffney's Find prospect, which lie on granted mining leases. Previous drilling includes high grade intercepts, **14m @ 71.7 g/t gold, 34m @ 14.8 g/t gold, 8m @ 11.4 g/t gold, 2m @ 147.0 g/t gold, and 5m @ 96.7 g/t gold** associated with quartz veining in shallow south-west plunging shoots. The Hibernian deposit has only been drill tested to 70m below surface and there is strong potential to expand the deposit with drilling testing deeper extensions to known shoots and targeting new shoot positions. Extensions to mineralised trends and new regional targets will be tested with Aircore during drilling campaigns. (see ASX announcement dated 29 May 2013 and titled "High grade Egerton Gold Project Secured Under Option").

Further information is available at www.gascoyneresources.com.au

Competent Persons Statement

The information in this announcement that relates to Mineral Resources for the Gilbey's, Gilbey's South, Plymouth, and Sly Fox gold deposits at the Dalgara Gold Project is based on, and fairly represents, information and supporting documentation compiled under the supervision of Mr Michael Job and Mr Michael Millad. Mr Michael Job is a Principal Geologist/Geostatistician at Cube Consulting Pty Ltd and a Fellow in good standing of the Australian Institute of Mining and Metallurgy. Mr Michael Millad is a Director and Principal Geologist/Geostatistician at Cube Consulting Pty Ltd, and a Member in good standing of the Australian Institute of Geoscientists. Both Mr Job and Mr Millad have sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity that was undertaken to qualify as a Competent Persons, as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (The Joint Ore Reserves Committee Code – JORC 2012 Edition). Mr Michael Job and Mr Michael Millad consent to the inclusion in this announcement of the Mineral Resource estimates for the Gilbey's, Gilbey's South, Plymouth and Sly Fox deposits and supporting information in the form and context in which it appears.

The information in this announcement that relates to Mineral Resources for the Golden Wings gold deposit at the Dalgara Gold Project is based on, and fairly represents, information and supporting documentation compiled by Mr Scott Dunham, a Competent Person who is a Fellow of The Australia Institute of Mining and Metallurgy and an employee of SD2 Pty Ltd. Mr Dunham has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity that was undertaken to qualify as a Competent Persons, as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (The Joint Ore Reserves Committee Code – JORC 2012 Edition). Mr Scott Dunham consents to the inclusion of the Golden Wings Mineral Resource estimate and supporting information in the form and context in which it appears.

The Ore Reserves for the Gilbey's, Gilbey's South, Sly Fox and Golden Wings gold deposits at the Dalgara Gold Project is based on, and fairly represents, information and supporting documentation compiled under the supervision of Mr. Neil Rauert. Mr. Neil Rauert is a Senior Mining Engineer and full-time employee of Gascoyne Resources and a Fellow in good standing of the Australian Institute of Mining and Metallurgy. Mr. Neil Rauert has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity that was undertaken to qualify as a Competent Person, as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' (The Joint Ore Reserves Committee Code – JORC Code 2012 Edition). Mr. Neil Rauert consents to the inclusion of the Ore Reserves estimates for the Gilbey's, Gilbey's South, Sly Fox and Golden Wings deposits and supporting information in the form and context in which it appears. (see ASX announcement dated 3 October 2019).

Information in this announcement relating to the Dalgara project is based on, and fairly represents, data compiled by Gascoyne's Chief Geologist Mr Julian Goldsworthy who is a member of The Australasian Institute of Mining and Metallurgy. Mr Goldsworthy has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as Competent Persons under the 2012 Edition of the Australasian Code for reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Goldsworthy consents to the inclusion of the matters based on his information in the form and context in which it appears.

The Glenburgh Mineral Resources have been estimated by RungePincockMinarco Limited, an external consultancy, and are reported under the 2012 Edition of the Australasian Code for reporting of Exploration Results, Mineral Resources and Ore Reserves (see ASX announcement dated 24 July 2014 and titled "High Grade Domains Identified Within Updated Glenburgh Gold Mineral Resource"). The company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and that all material assumptions and technical parameters underpinning the estimate in the original market announcement continue to apply and have not materially changed. The company confirms that the form and context in which the Competent Person's findings are presented have not materially modified from the original market announcement.

The Mt Egerton drill intersections referred to in this announcement were prepared and first disclosed under the JORC Code 2004 (see ASX announcement dated 29 May 2013 and titled "High grade Egerton Gold Project Secured Under Option"). They have not been updated since to comply with the JORC Code 2012 and the Company confirms that it is not aware of any new information or data that materially affects the information included in the original announcement.

Information in this announcement relating to the Mt Egerton Gold Project is based on, and fairly represents, data compiled by Gascoyne's Chief Geologist Mr Julian Goldsworthy who is a member of The Australasian Institute of Mining and Metallurgy. Mr Goldsworthy has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as Competent Persons under the 2004 Edition of the Australasian Code for reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Goldsworthy consents to the inclusion in this announcement of the data relating to the Mt Egerton Gold Project in the form and context in which it appears.

Appendix 3: JORC Table 1 for Gilbey's, Gilbey's South, Plymouth and Sly Fox Deposits

Dalgaranga Gold Project – Table 1 (JORC Code, 2012)

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	- The Dalgaranga gold deposits have been sampled using Trenches (TR) Rotary Air Blast (RAB) drilling, Air Core (AC) drilling, Reverse Circulation (RC) drilling and Diamond (DD) drilling over numerous campaigns by several companies and currently by Gascoyne Resources Limited (GCY). Grade Control (GC) RC drilling was undertaken by GCY in 2018 - 2020 (since commencement of mining) with the majority of holes drilled on a 10m x 7.5m grid over modelled mineralisation. The TR, RAB and AC samples have been excluded from gold interpolation for this Mineral Resource estimate since these sampling methods are considered to be of insufficient quality for the purpose of resource definition. These lower quality results, were, however, used to assist in the interpretation of mineralisation domains for interpolation of gold grade. - Sampling procedures followed by historic operators are assumed to be in line with industry standards at the time. - During historical (pre-2017) resource drilling campaigns, RC drilling was used to obtain 1m samples which were split by either cone or riffle splitter at the rig to produce a 3 - 5kg sample. In some cases, a 4m composite sample of approximately 3 – 5kg was collected from the top portion of the holes considered unlikely to host significant mineralisation. The samples were transported to the laboratory for analysis via 25g Fire Assay. Where anomalous results were detected in the 4m composites, single metre re-split samples were collected for subsequent analysis, also via 25g Fire Assay.

Criteria	JORC Code explanation	Commentary
		- A 4m composite sample of approximately 3 – 5kg was collected for all AC drilling. This was transported to the laboratory for analysis via a 25g Aqua Regia digest with reading via a mass spectrometer. Where anomalous results were detected, single metre samples were collected for subsequent analysis via a 25g Fire Assay. - The diamond drilling was undertaken as complete diamond holes or diamond tails to completed RC holes. The majority of the diamond holes were NQ core holes that were sampled by ½ core sampling while the HQ hole was ¼ core sampled. The samples are assayed using 50g charge fire assay with an AAS finish. - GC RC drilling, which commenced in 2018, collected samples at 1m intervals via a static cone split at the rig to produce a 2 - 4kg sample. The samples were sent to the Dalgaranga Site Lab or commercial Laboratory - MinAnalytical for analysis. At MinAnalytical the samples were initially analysed by Fire Assay and then, from mid-2018, by Photon Assay. At the Dalgaranga Site Lab samples were assayed using the Dalgaranga Mine Site laboratory using the Pulverise and Leach (PAL) assaying process.
<i>Drilling techniques</i>	<i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	Resource definition RC drilling and GC RC drilling used a nominal 5½ inch diameter face sampling hammer. AC drilling used a conventional 3½ inch face sampling blade to refusal or a 4 ½ inch face sampling hammer to a nominal depth. The diamond drilling was undertaken as diamond tails to the RC holes or diamond holes.
<i>Drill sample recovery</i>	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	- RC and AC sample recovery was visually assessed and recorded where significantly reduced. Very little sample loss was noted. The diamond drilling recovery was excellent with very little or no core loss identified. - RC samples were visually checked for recovery, moisture and contamination. A cyclone and splitter were used to provide a uniform sample and these were routinely cleaned. AC samples were visually checked for recovery moisture and contamination. A cyclone was used and routinely cleaned. 4m composites were speared to obtain the most representative

Criteria	JORC Code explanation	Commentary
		sample possible for AC drilling. - DD drilling was undertaken and the core measured and orientated to determine recovery, which was generally 100%. The diamond core has been consistently sampled with the left hand side of the NQ hole sampled, while for the HQ, the left hand side of the left hand half was sampled. - Sample recoveries are generally high. No significant sample loss was recorded with a corresponding increase in gold present. Sample bias is not anticipated, and no preferential loss/gain of grade material was noted.
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. - The total length and percentage of the relevant intersections logged.	- Detailed logging exists for most historic holes in the data base. - Current RC and AC chips are geologically logged at 1m intervals and to geological boundaries respectively. RC Resource hole chip trays and end of hole chips from AC drilling have been stored for future reference. - Drill chips from GC RC drill holes are not retained, with exceptions being retained to confirm lithological logging. - DD drill holes have all been geologically, structurally and geotechnically logged. The diamond core was photographed tray-by-tray, both wet and dry. - RC and AC chip logging recorded the lithology, oxidation state, colour, alteration and veining. - All GCY drill holes were logged in full.
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. - Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.	- Diamond drilling completed by GCY was sawn as ½ core (for NQ) or ¼ core (for HQ) and sampled. Previous companies have conducted diamond drilling - it is unclear whether ½ core or ¼ core was taken by previous operators. - RC chips were riffle or cone split at the rig to produce a 2 - 4kg sample at 1m intervals. AC samples were collected as 4m composites (unless otherwise noted) using a spear of the drill spoil. Samples were generally dry. 1m AC resamples are riffle split or speared. - At MinAnalytical the samples were analysed by either Fire Assay or from mid-2018, by Photon Assay. Both techniques involve drying the sample. For Fire Assay the sample is crushed and pulverised then assayed for gold using

Criteria	JORC Code explanation	Commentary
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	a 50g charge lead collection Fire Assay with AAS finish. For Photon Assay, the sample is crushed to nominal 85% passing 2mm, linear split and a nominal 500g sub sample taken (method code PAP3502R). The 500g sample is assayed for gold by Photon Assay (method code PAAU2) along with quality control samples including certified reference materials, blanks and sample duplicates. - At the Dalgaranga Site Lab, samples were assayed using the PAL assaying process. The PAL technique involves drying of the drill chips, followed by a split to 250-500g of material, which is processed in the PAL1000 for 65 minutes; 100ml of solution is collected and centrifuged, 10ml aliquot is collected and assayed for gold by AAS technique. - Field QAQC procedures call for the insertion of 1 in 25 certified reference materials (CRM) 'standards' and 1 in 50 field duplicates for RC and AC drilling and the insertion of "blank" samples. Diamond drilling has 1 in 25 CRMs included. - Field duplicates were collected during RC and AC drilling. Further sampling (lab umpire assays) is conducted if it is considered necessary. - A sample size of 2 - 5 kg was collected from the original RC sample of 20 – 40kg depending on material density. This size is considered appropriate and representative of the material being sampled given the width and continuity of the intersections, and the grain size of the material being collected, as an industry standard.

Criteria	JORC Code explanation	Commentary
<i>Quality of assay data and laboratory tests</i>	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	- All historical RC samples were analysed using a 25 or 50g charge Fire Assay with an AAS finish which is an industry sample for gold analysis. - A 25g Aqua Regia digest with an MS finish has been used for AC samples. Aqua Regia can digest many different mineral types including most oxides, sulphides and carbonates but will not totally digest refractory or silicate minerals. Historically the samples have been analysed by both Aqua Regia digest and a leachwell process. Significant differences were recorded between these analytical techniques. - The DD sampling was assayed using Fire Assay with a 50g charge and an AAS finish. Additional quartz washes of the grinding mills are undertaken by the lab, before and after samples which contain visible gold. - Photon Assay of RC grade control in 2018 and 2019 has utilised the same QAQC protocols to ensure quality of the assays, the non-destructive nature of the Photon Assay technique provides an alternative assay technique to Fire Assay and is considered a partial technique due to the fact matrix characteristics will alter the detection limits, this is not considered significant at a grade control level. - The PAL assay method used at the Dalgaranga Site Lab is considered to be a partial method, with gold extraction dependent on a leaching process. - No geophysical tools have been used at Gilbey's. - No QAQC results are available for historical (pre-GCY) sampling. - GCY Field QAQC procedures include the insertion of both field duplicates and standards, as well as 'blank' samples. Laboratory QAQC involves the use of internal certified reference materials, blanks, splits and replicates. - Analysis of the field duplicates shows that for the PAL and Photon assays, there is a relatively low degree of repeatability, with the average ACV being at 34% and 39%, respectively, which is in the upper half of the 'acceptable' range of 20% to 40%. The Fire Assay duplicate samples, also fall within the upper half of the 'acceptable' range with an ACV of 37%. The ACV is assessed only for samples returning a grade greater than 0.1 g/t au.

Criteria	JORC Code explanation	Commentary
		• No pulp duplicates were submitted by GCY, but the laboratory pulp duplicates for the Fire Assay and Photon methods at MinAnalytical both fail the precision test, with average CV's of 23% and 24%, respectively ('acceptable' range is considered to be 10% to 20%). • The PAL and Photon assay standards pass the accuracy test, with no significant bias being evident. However, both fail the precision test for standards. The Fire Assay samples pass both the accuracy and precision tests for standards. • The blank samples returned satisfactory results. • The actual insertion rates for duplicates and standards are considered to be too low, while those for blanks are deemed to be satisfactory. However, the insertion rates have increased significantly during 2020 • While precision appears to be a noteworthy issue for GC samples, the QAQC results are believed to be sufficiently satisfactory to support the use of the drill assay data for Mineral Resource estimation. Greater than 90% of the gold metal reported in this Mineral Resource is informed by Resource Development (RDV) drilling analysed by Fire Assay, which returned relatively good QAQC results.
Verification of sampling and assaying	• <i>The verification of significant intersections by either independent or alternative company personnel.</i> • <i>The use of twinned holes.</i> • <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> • <i>Discuss any adjustment to assay data.</i>	• No independent sampling has been undertaken by Cube. • Significant intersections were visually field verified by company geologists. • No twinned holes have been drilled to date - although GC drilling has confirmed mineralisation thickness and tenor in oxide material below pallid zone depletion. • Field data were collected using Field Marshal software on tablet computers for pre-2018 drilling campaign, post January 2018 the Geobank Mobile software was used to collect Geological logging data. The data pre-2018 was sent to Mitchell River Group for validation and compilation into an SQL database server, for post January 2018 the data was processed and validated by in-house database administration and compiled into the SQL

Criteria	JORC Code explanation	Commentary
		database - Assay values that were below detection limit were adjusted to equal half of the detection limit value, with a minimum floor value of 0.001g/t Au set in all such instances. - Unsampled intervals denoted by a large negative value were reset to null values and were therefore ignored during estimation. - Null or missing assay intervals were examined on a case-by-case basis. Some of these intervals cross known zones of mineralisation and in such instances no action was taken (i.e., null retained). In cases where the surrounding results and specific location supported the assumption that the assay intervals were not sampled due to a decision taken by a geologist on the lack of visible mineralisation, grade values of 0.001g/t Au were inserted.
<i>Location of data points</i>	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i>	- All drill hole collars were surveyed in the MGA94 Zone 50 grid. - Historical collars were surveyed to within +/- 1m. - GCY drill collars have been surveyed by DGPS equipment and mine site Surveyors. A down hole survey was taken at least every 30m in RC holes by electronic multi-shot tool by the drilling contractors. Gyro surveys have been undertaken on selected holes to validate the multi shot surveys. GC drill holes completed after August 2018, except for a few holes where equipment was not available, were surveyed with a minimum of two surveys per hole. - The hole collars and downhole survey azimuths were transformed to Gilbey's local grid for use in this mineral resource estimate. - An aerial topographic survey was flown in 2016. A 5m resolution was used for Mineral Resource estimation and is considered appropriate. Monthly DTM and orthophoto images are collected via drone photography providing excellent ongoing control on topography.

Criteria	JORC Code explanation	Commentary
<i>Data spacing and distribution</i>	<i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i>	- Initial exploration by GCY was targeting discrete areas that may host mineralisation. Consequently Resource drilling pre-2018 was not grid based. However, when viewed with historic data, the drill holes lie on existing grid lines and within 25m - 100m of an existing hole. - RDV drilling in most of the Dalgaranga Project areas is nominally at a 25m – 40m spacing, but becomes less dense at depth. - GC drilling has been to test areas of modelled resources and is generally at a spacing of 10m x 7.5m. - The RDV drill spacing in unmined volumes is sufficiently dense in areas where relatively long range mineralisation continuity has been demonstrated, the best examples of this being the Main Porphyry Zone at Gilbey's (previously mined by Equigold) and at Sly Fox. Peripheral zones at Gilbey's, such as the Gilbey's Eastern Cutback, Gilbey's Far North, Gilbey's Starter Pit and Gilbey's South areas, have been proven by GC drilling to be much more discontinuous, and therefore difficult to model with high confidence using RDV data only. However, the mineralised zones have sufficient continuity in both geology and grade to be considered appropriate for the Mineral Resource and Ore Reserve estimation procedures and classification categories specified under the 2012 JORC Code. - Drill assay intervals were composited to 1m for the purpose of gold grade estimation.
<i>Orientation of data in relation to geological structure</i>	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	- The majority of drill holes have a dip of -60° towards local grid east. one program of 10m x 10m spaced holes in early 2018 tested an alternative drilling direction of -60° towards local grid southeast, however the change was not seen as an improvement and all subsequent drilling has been towards local grid east at the Gilbey's deposit and the Plymouth deposit, where local grid north – south striking mineralisation predominates. For the the east – west striking Sly Fox and Gilbey's South deposits, holes are appropriately oriented towards local grid south. - The vast majority of the drill holes used are thus considered to be oriented

Criteria	JORC Code explanation	Commentary
		near-optimally for intersection of gold mineralisation structures, ruling out any material bias due to drill orientation.
<i>Sample security</i>	<i>The measures taken to ensure sample security.</i>	- Chain of custody is managed by GCY. RC samples collected pre-2018 were delivered daily to the Toll depot in Mt Magnet by GCY personnel. Toll delivered the samples directly to the assay laboratory in Perth. In some cases company personnel have delivered the samples directly to the laboratory. DD core was transported directly to Perth for cutting and dispatch to the assay laboratory for analysis. 2018-2020 grade control samples and 2019-2020 deep RC resource drilling samples are collected immediately as drilled and stored in a designated area at the Dalgaranga mine site administration office. They are stored in closed bulk bags, numbered and ordered ready for transport. To ready the bulk bags for transport they are strapped to pallets, limiting the chance to tamper with sample bags during transport. The samples are sent once or twice weekly directly to Minanalytical Laboratory via the company's preferred transport provider. Consignments are specific to GCY, thereby limiting potential security issues.
<i>Audits or reviews</i>	<i>The results of any audits or reviews of sampling techniques and data.</i>	Data pre-2018 was validated by Mitchell River Group prior to loading into the SQL database. Any errors within the data were returned to GCY for validation. All data collection and sampling protocols are to an industry standard and have passed independent technical review.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	- The Dalgaranga Gold Operation is situated on tenement number M59/749. GNT Resources (GNT 100% Gascoyne Resources - wholly owned subsidiary company) has a whole 100% interest in the tenement. - The tenement is in good standing and no known impediments exist.
<i>Exploration done by other parties</i>	<i>Acknowledgment and appraisal of exploration by other parties.</i>	The tenement area has been previously explored by numerous companies including BHP, Newcrest and Equigold. Mining was carried out by Equigold in a JV with Western Reefs NL from 1996 – 2000.
<i>Geology</i>	<i>Deposit type, geological setting and style of mineralisation.</i>	- Regionally, the Dalgaranga Gold Project lies within the Archean Dalgaranga Greenstone Belt in the Murchison Province of Western Australia. - At the Gilbey's deposit, most gold mineralisation is associated with shears situated within biotite-sericite-carbonate pyrite altered schists with quartz-carbonate veining within a porphyry-shale-mafic (dolerite, gabbro, basalt) rock package (Gilbey's Main Porphyry Zone and Sly Fox). The Gilbey's Main Porphyry Zone trends north – south and dips moderately-to-steeply to the west on local grid while Sly Fox trends east – west and dips steeply to the north. These two trends define the orientation of the limbs of an anticlinal structure, with a highly disrupted area being evident in the hinge zone. - Lesser amounts of mineralisation outside of the porphyry-shale-mafic zones are associated with highly discontinuous structures in the footwall and hangingwall of the sheared porphyry-shale-mafic lithologies. The bulk of the GCY mining from 2018 to date has been within these areas of lesser structural and mineralisation continuity.

Criteria	JORC Code explanation	Commentary
<i>Drill hole Information</i>	• <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> ○ <i>easting and northing of the drill hole collar</i> ○ <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> ○ <i>dip and azimuth of the hole</i> ○ <i>down hole length and interception depth</i> ○ <i>hole length.</i> • <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	• All exploration results have previously been reported by GCY between 2013 and 2020. • All information has been included in the appendices. No drill hole information has been excluded.
<i>Data aggregation methods</i>	• <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> • <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> • <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	• Exploration results are not being reported. • Not applicable as a Mineral Resource is being reported. • Metal equivalent values have not been used.

Criteria	JORC Code explanation	Commentary
<i>Relationship between mineralisation widths and intercept lengths</i>	• <i>These relationships are particularly important in the reporting of Exploration Results.</i> • <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> • <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i>	• Most drill holes are angled to local grid east for the Gilbey's and Plymouth deposits and grid south for the Sly Fox and Gilbey's South deposits so that intersections are orthogonal to the expected orientation of mineralisation. It is interpreted that true width is approximately 70-100% of downhole intersections.
<i>Diagrams</i>	• <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	• Relevant diagrams have been included within the Mineral Resource report main body of text.
<i>Balanced reporting</i>	• <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	• Exploration results are not being reported.
<i>Other substantive exploration data</i>	• <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	• All interpretations for Gilbey's mineralisation are consistent with observations made and information gained during previous and current mining at the Gilbey's open pit.
<i>Further work</i>	• <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	• Dalgaranga is at a mining stage. Infill drilling for mining grade control will be completed during an ongoing grade control process. • Refer to diagrams in the body of text within the Mineral Resource report.

Section 3 Estimation and Reporting of Mineral Resources

(Criteria listed in section 1, and where relevant in section 2, also apply to this section.)

Criteria	JORC Code explanation	Commentary
Database integrity	- Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes. - Data validation procedures used.	- For GCY drilling, geological and field data is collected using Field Marshall or Geobank Mobile software on tablet computers. Historical drilling data has been captured from historical drill logs. - The data is verified by company geologists before being sent either to Mitchell River Group for validation or passing Geobank Software validation protocols for further review by staff Geologists and compilation into a SQL database server. Historic data has been verified by checking historical reports on the project. - The data is verified by company geologists before the data is sent to Mitchell River Group (pre 2018) for further validation and compilation into a SQL database server. Historic data has been verified by checking historical reports on the project. Current data is verified by company geologists into present SQL database - Cube has undertaken a number of validation checks on the database, which include, but are not limited to, checks for overlapping intervals, checks for missing data/records, visual checks on drill hole traces to identify any possible survey issues, checks for out of range values and checks of survey, assay and geology table depths relative to the recorded maximum depth of drilling. No major issues were detected. - All drill types, including RAB, Trench and AC sample types, were utilised for mineralisation domain modelling. However, the RAB, Trench and AC samples were considered invalid for gold grade estimation/interpolation (insufficient sample quality) and so were excluded from these processes. The predominant drill type used for estimation is RC, with a minor number of available DD samples being available for use.
Site visits	- Comment on any site visits undertaken by the Competent Person and the outcome of those visits. - If no site visits have been undertaken indicate why this is the case.	One of the Competent Persons for this resource estimate (Michael Job) visited site on a regular basis between January and April 2019.

Criteria	JORC Code explanation	Commentary
<i>Geological interpretation</i>	• <i>Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit.</i> • <i>Nature of the data used and of any assumptions made.</i> • <i>The effect, if any, of alternative interpretations on Mineral Resource estimation.</i> • <i>The use of geology in guiding and controlling Mineral Resource estimation.</i> • <i>The factors affecting continuity both of grade and geology.</i>	• The confidence in the geological interpretation is considered to be variable. Within the Gilbey's Main Porphyry Zone and at Sly Fox, the confidence is high, being based on previous mining history and visual confirmation in outcrop and within the Gilbey's and Sly Fox open pits. Confidence in areas peripheral to the porphyry-shale-mafic packages is lower, given the discontinuous nature of the geological structures and mineralisation, allied with a high degree of weathering in the relatively shallow cutbacks mined by GCY to date, which limits the usefulness of visual outcrop observations. • Geochemistry and geological logging has been used to assist identification of lithology and mineralisation. Outcrops of mineralisation and host rocks within the open pits have assisted with definition of the geometry of the mineralisation. • Alternative interpretations of the mineralisation, particularly in the peripheral discontinuous zones, have been shown to have a significant impact on the Mineral Resource estimation. The assumptions of continuity need to be identified and carefully considered in such areas, in order to avoid misrepresenting the mineralised volume and continuity. The identification of the orientation component of the mineralisation geometry does not present as large a risk and is significantly better understood in this Mineral Resource update relative to the previous one. • The porphyry-shale-mafic zones are clearly more favourable for the development of relatively continuous mineralisation, while peripheral areas are less favourable. This knowledge has been considered during the modelling work for the Mineral Resource estimate. • Grade control drilling has confirmed overall geological continuity. It has also highlighted areas of poor grade continuity due to near surface depletion and less favourable geological factors. Grade continuity appears to be increasing at depth, even in more erratic peripheral areas, with decreased weathering.
<i>Dimensions</i>	• <i>The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource.</i>	• The Gilbey's Mineral Resource has an overall local grid north-south strike length of approximately 2,000m. The overall mineralised width of Gilbey's varies but for the majority is approximately 800m wide. The elevation extent of Gilbey's is from -100mRL to 450mRL (i.e. to roughly 550m below surface). • The Plymouth Mineral Resource has an overall local grid north-south strike length of approximately 350m. The average mineralised width is approximately

Criteria	JORC Code explanation	Commentary
		150m. The elevation extent of Plymouth is from 300mRL to 450mRL (i.e. to roughly 150m below surface). The Sly Fox Mineral Resource has an overall local grid east-west strike length of approximately 600m. The average mineralised width is approximately 150m. The elevation extent of Sly Fox is from 200mRL to 450mRL (i.e. to roughly 250m below surface).
<i>Estimation and modelling techniques</i>	<i>The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used.</i> <i>The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data.</i> <i>The assumptions made regarding recovery of by-products.</i> <i>Estimation of deleterious elements or other non-grade variables of economic significance (eg sulphur for acid mine drainage characterisation).</i> <i>In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed.</i> <i>Any assumptions behind modelling of selective mining units.</i> <i>Any assumptions about correlation between variables.</i> <i>Description of how the geological interpretation was used to control the resource estimates.</i> <i>Discussion of basis for using or not using grade cutting or capping.</i> <i>The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available.</i>	- Two estimation/interpolation approaches were used for gold grade. - The first method used was Localised Uniform Conditioning (LUC), which is a non-linear method developed specifically for the estimation of the grade distribution for blocks that are small relative to the available data spacing (i.e. Selective Mining Unit [SMU] sized blocks). LUC is able to produce SMU scale block grade estimates that are not over-smoothed. Over-smoothing is a problem that has long been recognised when using standard linear methods such as Ordinary Kriging (OK) for positively skewed and highly variable gold grade distributions, where the data spacing is relatively wide. The Dalganga gold grade distributions are universally positively skewed and highly variable. - The second method used was OK, but only in the volume covered by modern GCY GC drilling (10m x 7.5m spacing). The use of a linear estimate in areas informed by such dense data is considered to be appropriate. - Fifteen broad mineralisation domains were interpreted for LUC gold interpolation using Surpac 6.7.3 software. An additional mineralised waste 'halo' domain was also defined surrounding the fifteen domains, out to the limit of drilling, in order to provide a representation of gold grade for future exploration and infill drill targeting purposes. - Six LUC domains were defined on the north- south limb of the anticline, corresponding roughly to the porphyry-shale-mafic lithological zone (Domain codes 100 through 105). Domains 101 and 102 represent the Gilbey's Main Zone (GMZ), and encapsulates the most continuous, abundant and voluminous mineralisation. Domain 100 is situated within the Main Porphyry Zone, but is of lesser grade tenor and is characterised by narrow, less continuous oblique structural control. Domain 103 is to the north of Domains 100 to 102 and represents a less continuous zone of mineralisation that has been displaced to the west by a cross-cutting fault. Domain 104 is south of Domains 100 to 102, and encapsulates a near-surface zone of mineralisation that is situated close to

Criteria	JORC Code explanation	Commentary
		the fold hinge zone. Domain 105 is a small, currently sparsely defined zone of higher grade mineralisation in the footwall of the GMZ. These domains were the primary target of historical Equigold mining. GNT has only recently begun to access the GMZ domains, which will underpin the bulk of gold production into the future. • LUC Domains 201 and 202 represent a relatively narrow band of westerly dipping mineralisation in the hangingwall (i.e. to the west) of the Main Porphyry Zone. This structure is oblique to the GMZ and gradually approaches it to the north, where it eventually merges with the GMZ mineralisation. • LUC Domains 401 and 402 represent NNE-SSW striking diffuse and discontinuous mineralisation in the footwall (i.e. to the east) of the Main Porphyry Zone. These domains have recently been mined by GCY in the Gilbey's Eastern cutback. • LUC Domains 501 and 502 are situated at the far southern end of the project area, and encompass erratic and discontinuous mineralisation situated within the east – west striking limb of the anticline to the immediate south of the Main Porphyry Zone. These domains have recently been mined by GCY in the stand-alone Gilbey's South pit. • LUC Domain 601 represents the Plymouth deposit, which is situated at the western end of Sly Fox, but strikes north – south, and appears to be a southern extension to the Domain 401 and 402 footwall mineralisation. Plymouth is also characterised by erratic and discontinuous gold mineralisation and has not been mined to date. • LUC Domain 701 represents the Sly Fox mineralisation envelope, which strikes east – west on local grid. • The mineralised waste 'halo' LUC domain has been designated Domain 900. • In addition to the aforementioned geological associations, the LUC domain boundaries were designed so as to capture very broadly the main mineralisation trends and settings. A very high tolerance for incorporation of internal waste was therefore applied. Where possible, a nominal grade cut-off of 0.2g/t Au was employed, but, especially in the more erratic peripheral zones, the boundaries were often defined at a lower grade, in order to ensure that all the potential mineralisation was captured in a sensibly continuous shape, while at the same time ensuring that the relatively depleted near-surface pallid zone

Criteria	JORC Code explanation	Commentary
		was excluded (unless assay data showed otherwise) and while limiting the extrapolation of volume beyond the available drill data. • The domains for OK estimation in the GC volume were defined by intersecting the volume covered by the GC drilling with the estimation domains discussed above. • Gold grade composites were produced to equalise sample support using the 'best-fit' method in Surpac 6.7.3, with a target length of 1m. • Gold grade caps were selected per domain, with due consideration given to the robustness of the upper tail of the gold distribution and the spatial continuity within the domain. • LUC estimation was undertaken using an initial 'Panel' block size of 15mE x 15mN x 5mRL (local grid). The E and N dimension were chosen based on a nominal RDV drill spacing of between 25m and 30m in most areas. The vertical Panel dimension was set at double the current flitch height of 2.5mRL, and is supported by the dense 1m composite data in the downhole direction. The ultimate SMU estimation block size for the LUC was set at 5mE x 5mN x 2.5mRL, in order to reflect the current view on practical mining selectivity, with the vertical dimension matched to the flitch height. Equal E and N dimensions were selected for the blocks since the block model represents a mix of north – south and east – west striking ore bodies on the local grid. • The master Surpac block model was designed with a 5mE x 5mN x 2.5mRL parent block size, with allowance for sub-blocks down to 2.5mE x 2.5mN x 1.25mRL for accurate volume definition. • Gold grade variogram models were undertaken for all LUC and OK GC domains by transforming the composite data to Gaussian space, modelling a Gaussian variogram, and then back-transforming the Gaussian models to real space for use in interpolation. This transformation method de-skews the gold data and thereby enhances the detection of the true underlying spatial structure. All available valid RDV and GC composites were used for variography, thus ensuring the best possible definition at short ranges. • LUC estimation was undertaken initially using just RDV data as input. During a series of trial LUC runs, it was realised that the use of standard capping and search parameters was unable to account for the reduced grade observed in some of the more erratic and discontinuously mineralised areas once GC drilling

Criteria	JORC Code explanation	Commentary
		was undertaken. The RDV data only LUC runs were therefore compared to the OK GC models within the various GC volumes, which cover most of the areas in question. Distance limiting above a specified grade threshold was applied to the Panel estimate in the LUC workflow, in order to inhibit the propagation of high grade composites in the estimation. The distance limiting thresholds were picked by identifying inflexions in the gold grade distribution and distance limits were based largely on the practical range of the relevant gold grade variograms. The practical range is defined as being the distance at which the variogram reaches between 80% and 90% of the sill value. The distance limiting parameters are believed to reflect the reality that some parts of the Dalganga Project are characterised by high grade continuity that is significantly less than the RDV drill spacing. This exercise thus serves the important purpose of ‘calibrating’ the forward-looking part of the Mineral Resource model, which is informed primarily by relatively wide spaced RDV data, by reference to the densely sampled GC volume. The distance limiting parameters defined by this exercise were utilised in the final LUC runs, which used all available valid data (i.e. RDV + GC). • LUC estimation commenced with the large Panel block estimates, which is undertaken using OK. This was followed by a Change of Support (CoS) step, which uses the composite gold grade distribution and variogram model to define a gold grade distribution at the SMU block scale. An Information Effect correction, which accounts for the imperfect predictions that dense GC data will produce, was modelled as part of the CoS, assuming a GC drill spacing of 8mX x 10mY x 1mRL. Uniform Conditioning (UC) was then undertaken to produce a model of the SMU block grade, tonnage and metal distribution within each Panel, which is conditioned to the Panel grade. The resulting array variables for a range of cut-off grades is stored in the Panel block model. Finally, LUC is undertaken whereby the UC SMU block grade distribution stored in the Panel model is devolved to the SMU block model via a discretization post-processing procedure, thus resulting in a single grade value per SMU block. • Search radius parameters for the LUC process were based on the anisotropy evident in the variograms, and by visual inspection of the pattern of informing composite selection. Discoidal shaped searches were used throughout, with major and semi-major axes radii being equal to each other and four times

Criteria	JORC Code explanation	Commentary
		longer than the minor axis search radius. Anisotropic composite selection was activated, whereby the distance to a sample is considered to be a proportion of the distance to the ellipsoid surface. In addition, four quadrants were used in the search, with a maximum limit set for the number of allowable composites for each quadrant, in order to limit the number of samples selected from a single hole. Minimum (8) and maximum (20) numbers of allowable samples were selected based on Quantitative Kriging Neighbourhood Analysis. The use and method of selection of distance limiting parameters for some domains has already been discussed above. Only a single estimation pass was implemented to avoid the production of artefacts at pass boundaries, which are undesirable, especially for non-linear estimation, where the effect of such artefacts can be amplified during the CoS step. • OK GC estimation was undertaken using both the RDV and GC data. The estimation block size used was the chosen SMU size of 5mE x 5mN x 2.5mRL, with any SMU block having at least one sub-block falling within the wireframes being tagged for estimation. • Search radius parameters for the OK GC process were based on the anisotropy evident in the variograms, and by visual inspection of the pattern of informing composite selection. Discoidal shaped searches were used throughout, with major and semi-major axes radii being equal to each other and four times longer than the minor axis search radius. Anisotropic composite selection was activated, whereby the distance to a sample is considered to be a proportion of the distance to the ellipsoid surface. In addition, four quadrants were used in the search, with a maximum limit set for the number of allowable composites for each quadrant, in order to limit the number of samples selected from a single hole. A minimum of 2 and maximum of 12 samples were allowed for estimation. No distance limiting parameters were applied. • In the case of both the LUC and OK GC estimation, locally varying rotations were used for both the variogram model and search neighbourhood. These were based on interpreted surfaces that reflect the plane of maximum continuity of the gold mineralisation within each domain. The major and semi-major axes of the variograms and searches were thus oriented parallel to situated within these planes. • The OK GC model was merged with LUC model by volume weighting into the

Criteria	JORC Code explanation	Commentary
		SMU blocks. The OK GC and LUC estimates were first devolved to sub-block level (2.5m x 2.5m x 1.25m). The OK GC and LUC sub-block grades were then re-blocked back to the 5m x 5m x 2.5m SMU block size, combining the two estimates at the juncture of the two zones using the volume proportions derived from the corresponding number of sub-blocks for each. • Isatis v2018 was used to undertake the LUC and OK GC estimation, with the results being imported into the master Surpac block model. • No variables other than gold grade were interpolated. • The gold model was validated by comparison of global composite means and block estimate means. Swath plots by northing and elevation slice were generated to compare composite grades to estimated block grades at the semi-local scale. In those areas where distance limiting was applied during interpolation, the global and semi-local checks reveal that the mean estimated gold grade is somewhat lower than the composite means, as would be expected, but the estimated grade fluctuations are observed to mirror those of the input composites. Agreement between composites and block estimates was generally observed to be good. Visual checks of the block estimates against the raw assay data were undertaken, with good local agreement being observed. A check Inverse Distance Squared estimate, with distance limiting parameters identical to those used in the LUC process, was also compared and agreed well with the primary estimates. • Wherever feasible, the estimated Mineral Resource was compared to mining and production data. The production data from the Equigold mining period are considered to be the most definitive, since they involve little or no mixing of sources. A nominal 0.7g/t Au cut-off was used during the Equigold mining with actual total production from the historical pit reported as 4.39Mt at 1.54g/t Au for 217.8koz Au. The Mineral Resource was reported within the historical Equigold pit volume, predicting 4.48Mt at 1.53g/t Au for 220.1koz Au. The tonnes and gold metal therefore agree to within a margin of approximately 2%. The production data were also compared to the Mineral Resource model on a 10m elevation slice basis and, with a few exceptions, the agreement is observed to be close. The Equigold pit primarily targeted the Gilbey's Main Porphyry Zone, represented largely by Domains 100, 101 & 102 in this Mineral Resource estimate, with a lesser contribution from the hangingwall lode represented by

Criteria	JORC Code explanation	Commentary
		Domain 202.
Moisture	Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.	Density and tonnage was estimated on a dry in situ basis.
Cut-off parameters	The basis of the adopted cut-off grade(s) or quality parameters applied.	Variable cut-off grades of 0.25g/t Au outside of the black shale and 0.3g/t Au inside the black shale were used for reporting the Mineral Resource, based on the latest economic analysis of the Dalgaranga Project. The black shale does produce a recovery penalty in the mill.
Mining factors or assumptions	Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.	- Open pit mining is currently underway at Dalgaranga. The existing LOM plan calls for the continuation of open pit mining to access and extract a large portion of the more continuous Gilbey's Main Porphyry Zone. - The LUC and OK GC models comprising the reportable Mineral Resource are considered to account for the vast majority of mining dilution due to incorporation of all data in a broad envelope for the base estimation processes. Cube has recommended that ore loss factors due to mining be set at a higher level within areas peripheral to the Gilbey's Main Porphyry Zone, since such areas represent highly discontinuous mineralisation that is likely to prove relatively difficult to correctly classify during grade control and mining procedures. Mining within the broader and more continuous mineralisation of the Gilbey's Main Porphyry Zone is much less likely to result in material misclassification.
Metallurgical factors or assumptions	The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical	Black (carbonaceous) shales occurring within the mineralised sequence are known to result in lower recoveries. The black shales have been modelled using implicit methods (Leapfrog) and were flagged into the block model. A gold recovery of 73% is currently in use, which is at the lower end of metallurgical test work that was undertaken on black shale material.

Criteria	JORC Code explanation	Commentary
	<i>assumptions made.</i>	
<i>Environmental factors or assumptions</i>	Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.	No assumptions were made regarding environmental restrictions.
<i>Bulk density</i>	- Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples. - The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit. - Discuss assumptions for bulk density estimates used in the evaluation process of the different materials.	- Some 434 density measurements from sample collected at Gilbey's Were available for density estimation. - Density is measured using the water immersion technique. Moisture is accounted for in the measuring process and measurements were separated for lithology, mineralisation and weathering. - It is assumed there are minimal void spaces in the rocks within the Gilbey's deposit. Values applied in the Gilbey's block model are similar to other known bulk densities from similar geological terrains. - Previously, density values of 1.8, 2.0, 2.4 and 2.8t/m³ were assigned respectively to alluvium/dumps, the oxide zone, the transitional zone and the fresh zone. The only slight revision to these assigned values in this update was to the transitional zone, where a density of 2.5t/m³ has now been assigned.
<i>Classification</i>	- The basis for the classification of the Mineral Resources into varying confidence categories. - Whether appropriate account has been taken of all relevant factors (ie relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data). - Whether the result appropriately reflects the Competent Person's view of the deposit.	- The Mineral Resource estimate is reported here in compliance with the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' by the Joint Ore Reserves Committee (JORC). - The Mineral Resource was classified as Measured, Indicated and Inferred Mineral Resource based on data quality, sample spacing, geological understanding of mineralisation controls and geological/mineralisation continuity. - At the Gilbey's Main Porphyry Zone (Domain 100, 101 & 102), the Measured Mineral Resource was defined within areas of grade control drilling. The Indicated Mineral Resource was defined within areas of close spaced diamond

Criteria	JORC Code explanation	Commentary
		and RC drilling of less than 40m x 40m, and where the continuity and predictability of the lode positions was considered to be good. The Inferred Mineral Resource was assigned to areas where drill hole spacing was greater than 40m by 40m, where mineralisation continuity can only be assumed. • In the Sly Fox, Plymouth, Gilbey's East, Gilbey's North, Gilbey's South and Gilbey's Starter Pit areas no Measured Mineral Resources were defined. The high level of geological complexity, relatively limited geological and mineralisation continuity and low sample precision precluded classification at the Measured level of confidence. Indicated Mineral Resources were defined in areas of dense 10m x 7.5m GC drilling, except for Sly Fox, where Indicated Resources were defined where drill spacing was less than 40m x 40m. The Inferred Mineral Resource was assigned to areas outside of the GC volume, which are informed only by relatively wide spaced RDV drill holes. • The input data is comprehensive in its coverage of the mineralisation in most areas and does not favour or misrepresent in-situ mineralisation. The model has been confirmed by infill and GC drilling, which supported the interpretation. Validation of the block model shows good correlation of the input data to the estimated grades. • The Mineral Resource estimate appropriately reflects the view of the Competent Person.
Audits or reviews	• <i>The results of any audits or reviews of Mineral Resource estimates.</i>	• The Mineral Resource estimation domains, estimation process and block model have been internally peer reviewed at Cube Consulting, supporting the approach adopted.

Criteria	JORC Code explanation	Commentary
Discussion of relative accuracy/confidence	- Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate. - The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used. - These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.	- The reported Mineral Resources constitute a local resource estimate. All Measured and Indicated Mineral Resources would be available for economic evaluation. - Historical production data and reconciliation undertaken between Equigold mining and Mineral Resources indicate an excellent correspondence with the Mineral Resource estimate in the Gilbey's Main Porphyry Zone. - Recent mining (since July 2019), which has been focused in the discontinuous peripheral areas, has not always agreed well with the Mineral Resources, although there has been a major improvement in reconciliation relative to the previous OK model completed in 2018, which was replaced by the LUC OKGC modelling approach in June 2019. The relatively poor reconciliation in the peripheral areas may be in part a function of the difficulties of ore/waste classification at the mining stage and in part a function of the difficulties in estimating resources using relatively wide spaced drill data where the mineralisation is highly discontinuous. - The Gilbey's Main Porphyry Zone has only begun to form a significant portion of the plant feed over the last two months (March and April 2020), and the monthly reconciliation figures for April 2020 in particular show a good correspondence between the resource and Declared Ore Mined figures.

Appendix 4: JORC Table 1 for Golden Wings Deposits

Dalgaranga Gold Project – Table 1 (JORC Code, 2012)

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i>	Reverse circulation drilling for both grade control (10m sections by 5m on-section spacing) and resource definition (20-25m sections by 25m on-section spacing) drilled at a nominal 60° to the south. Historical drilling from pre-GCY owners is routinely updated by grade control sampling. Standard 1.0m RC sampling using an in-circuit cone splitter to produce nominal 3kg sample mass. Sample mass reduced to 500g by riffle splitting and analysed by PhotonAssay (gamma activation analysis of GAA) . Grade control drilling analysed by pulverise and leach (PAL)	

Criteria	JORC Code explanation	JORC Code explanation	Commentary
Drilling techniques	<i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	Reverse circulation drilling, 5½" face sampling bit. Diamond drilling as diamond tails to RC at HQ/NQ diameter	

Criteria	JORC Code explanation	Commentary
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	Visual assessment of RC recovery. Very little sample loss was noted during drilling. RC samples visually checked for moisture and contamination with routine drilling audits/reviews to monitor performance Field duplicates collected via dual port cone splitter and used to monitor sampling precision. No sampling bias was detected.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> <i>The total length and percentage of the relevant intersections logged.</i>	RC chips logged (1.0m intervals) for lithology, oxidation, colour, alteration and veining. RC chip trays stored for future reference. Logging data collected electronically and transferred to centralized database with in-process validation of logging codes. All drill holes logged in full.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	Samples collected from face-sampling bit through sample collection tube, passing through a cyclone. For resource drill holes, the cycloned sample enters a drop box for delimitation with approximately 1.0m intervals passed over an in-line cone splitter for mass reduction. The grade control drill holes use a similar sub-sampling with the exclusion of the drop box. Samples were generally dry. Mass reduction to 500g by riffle in the Dalgaranga site laboratory Quality control samples (certified reference materials) were inserted at a rate of 4%. Field duplicates were collected at a rate of 2%. Lab-to-lab 'umpire assays' have been analysed and a slight high-grade bias (0.2g/t) identified between labs.

Criteria	JORC Code explanation	Commentary
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	Samples were submitted to a site lab or Minanalytical Laboratory in Perth for analysis. RC samples were analysed using a 500g PhotonAssay technique (gamma activation analysis) or PAL (cyanide leach). PhotonAssay is a relatively new technique for Western Australia; however, it has been used for gold analyses since the 1970's in overseas jurisdictions. PhotonAssay was developed in Australia by the CSIRO and the Minanalytical lab is NATA certified. PhotonAssay is a geophysical analytical technique based on measuring the strength and wavelength of gamma radiation emitted when an x-ray excited nucleus falls back to a stable state. Samples submitted to the site lab were analysed by pulverise and leach (PAL) method. Field QAQC procedures include the insertion of both field duplicates and certified reference 'standards'. Assay results have been satisfactory and demonstrate an acceptable level of accuracy and precision. Laboratory QAQC involves the use of internal certified reference standards, blanks, splits and replicates. Analysis of these results also demonstrates an acceptable level of precision and accuracy.

Criteria	JORC Code explanation	Commentary
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i>	Significant intersections were visually field verified by company geologists. Some hole twinning has occurred during routine grade control drilling. Where there are differences between historical drill hole results and grade control results the historical data has been excluded from the estimate. Q-Q analysis was completed by comparing historical assays with GNT assays. The results indicate that there is no significant bias present. No factors or adjustments were made to the assay data. Assay data is supplied by the site lab and Minanalytical in and electronic format and uploaded directly into GNT's geological database. The upload process includes review and approval to minimize the risk of invalid results.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i>	All drill hole collars were surveyed in the MGA94 Zone 50 grid. Historical collars were surveyed to within +/- 1m. GCY drill collars have been surveyed by DGPS equipment. Holes drilled prior to September 2016 were surveyed with an electronic multishot system at 30m intervals. Post September 2016 a gyroscopic survey tool was used to collect 30m down-hole surveys with a final measurement approximately 3m from the hole collar. Some early grade control holes were not surveyed and have assumed dip/azimuth. These holes are in mined out portions of the deposit. Routine (monthly) aerial topographic surveys are completed as part of monitoring mining activities. Surveys are processed and certified by a licensed mine surveyor.

Criteria	JORC Code explanation	Commentary
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i>	RC grade control is on 10m sections with holes every 5-6m on section. Samples are collected at nominal 1.0m intervals down-hole from collar to end-of-hole. Resource definition drilling is wider-space, typically on a 25m x 25m grid. SD2 adopted a low grade threshold to define the mineralised zone. The geometry and extents of the mineralisation was defined using an implicit modeling method with manual control to minimize modeling artefacts. By definition the implicit method applied is data-driven and dependent on the data spacing. In SD2's opinion the modelled volume is a realistic representation of the mineralised system. Samples were composited to nominal 2.0m intervals prior to defining the mineralised domains and grade estimation.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	Drilling sections are orientated perpendicular to the strike of the mineralised host rocks at Golden Wings, which is towards the south. The drilling is angled at -60° which is approximately perpendicular to the dip of the stratigraphy. No orientation-based sampling bias has been identified in the data
Sample security	<i>The measures taken to ensure sample security.</i>	Chain of custody is managed by GCY. RC samples are collected from site and transported to Perth for analysis using contracted transport companies. Sample batches are labelled and sample identifiers cross-checked at dispatch and on receipt. Analytical results are returned electronically indexed by the GNT supplied sample identifier. The laboratory has no access to data regarding hole location or purpose.

Criteria	JORC Code explanation	Commentary
<i>Audits or reviews</i>	<i>The results of any audits or reviews of sampling techniques and data.</i>	There have been no external audits of sampling techniques. The geological database has been reviewed by SD2 as a part of this resource estimate. Minor omissions identified in the review were resolved by GCY.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.	The Dalgaranga Project is situated on tenement number M59/749. GCY has a whole 100% interest in the tenement. The tenement is in good standing and no known impediments exist.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	The tenement area has been previously explored by numerous companies including BHP, Newcrest and Equigold. Mining was carried out by Equigold in a JV with Western Reefs NL from 1996 – 2000.
Geology	Deposit type, geological setting and style of mineralisation.	Regionally, the Dalgaranga Project lies within the Archean Dalgaranga Greenstone Belt in the Murchison Province of Western Australia. At Golden Wings, two styles of in situ mineralisation are evident, with gold zones occurring as the following in fresh rock at depths around 100m: sericite-chlorite- quartz schists after mafic rocks or sediments; and quartz- pyrite-arsenopyrite plunging lodes within biotite-sericite-carbonate-pyrite schists related to quartz feldspar porphyry intrusions. The mineralisation is complexly deformed and the structural geological history forms an integral role in the location and tenor of gold mineralisation.
Drill hole Information	A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	A complete list of drill holes used in this estimate is included as Appendix D of this report. All RAB and air core drilling has been excluded from this estimate. 37 pre-GCY holes were excluded on the advice of the site geology team. These holes were removed after twinning by more recent drill holes.

Criteria	JORC Code explanation	Commentary
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	No metal equivalents were used in this estimate. Data aggregation for estimation involved compositing samples to a nominal 2.0m within the estimation domains. Grade caps were applied to the composited samples based on a statistical analysis of the grade frequency population. Composites were length-weighted with no consideration of bulk density.
Relationship between mineralisation widths and intercept lengths	<i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i>	Drill holes are oriented on north-south sections dipping at approximately 60°. This pattern is approximately orthogonal to the trend of the mineralisation and therefore intersections will approximate the true width of the mineralised zone.
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Refer to the body of this report. 3-dimensional perspective views of the data used for the estimate and the domains derived from the data are included though-out.
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	Not applicable for resource estimate. Refer to GCY public releases for details of exploration results.
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	Golden Wings is an active mining operation. Observations including geological features and trends, production performance and mining-metallurgical related productivity are available and, where appropriate, have been used for this resource estimate. This include data relating to broken bulk density, tonnes and grade reconciliation and economic performance. SD2 note that reconciliation data for Golden Wings is limited to the performance of a 3-operation blend supplied to the ore treatment plant.

Criteria	JORC Code explanation	Commentary
Further work	<i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	Grade control drilling will continue as mining progresses. Exploration for mineralisation external to the currently defined open pit will continue, targeting preferred zones identified by the improved geological knowledge obtained during mining.

Section 3 Estimation and Reporting of Mineral Resources

Criteria	JORC Code explanation	Commentary
Database integrity	<i>Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes.</i> <i>Data validation procedures used.</i>	Geological logs are electronically captured at the time of logging using Geobank software with in-built data validation and restricted logging legends. Logs are uploaded to the central geology database where a second level of validation is applied. Assay data is supplied directly from the laboratory in electronic format and uploaded to the central geology database. Data must be manually 'accepted' and passes through a routine series of validation steps. Prior to estimation SD2 reviewed the geology and assay data and completed standard validation tests to check for: - Duplicate sample intervals - Gaps in the sample interval / hole trace - Invalid results (e.g. negative assays) - Collar coordinates within the project area - Valid rates of change for down-hole surveys
Site visits	<i>Comment on any site visits undertaken by the Competent Person and the outcome of those visits.</i> <i>If no site visits have been undertaken indicate why this is the case.</i>	The Competent Person visited the Golden Wings operation in April 2019 and inspected the operation including: - Viewing the open pit operation and geology - Discussing the mineralisation with the site geology team - No drilling/sampling was observed due to operational constraints

Criteria	JORC Code explanation	Commentary
Geological interpretation	<i>Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit.</i> <i>Nature of the data used and of any assumptions made.</i> <i>The effect, if any, of alternative interpretations on Mineral Resource estimation.</i> <i>The use of geology in guiding and controlling Mineral Resource estimation.</i> <i>The factors affecting continuity both of grade and geology.</i>	The Golden Wings geology is complex exhibiting features controlled by multiple phases of structural deformation. This combined with the relatively high nugget effect and skewed grade distribution impacts on the confidence in the geological interpretation. Multiple alternative interpretations were examined for this estimate. SD2 developed and modelled a range of scenarios based on the available data. This analysis highlighted areas of higher/lower uncertainty. On a global-basis the remaining tonnes and grade for the different scenarios were within a small range, generally exhibiting less than 10% difference. The exception to this is the 2017 estimate where the interpretation tended to exaggerate grade continuity and contrast resulting in material difference in the estimated grade-tonnage curve. The geological interpretation was based on an indicator estimate at a 0.25g/t threshold. 3D surfaces (iso-contours) were modelled around this indicator and a 35% probability of grade exceeding 0.25 g/t was selected as the best representation of the geology. This choice was based on consideration of the mapped geometry of mineralised zone and the size, shape and orientation of dig blocks created from detailed grade control data. The resulting 3D surfaces were examined and compared to the known mineralisation controls (L_3^1 and L_4^1) demonstrating good overall alignment. The geological interpretation is consistent with the indicator variography and reflects the nature of the exposed geology including regions of relatively high continuity combined with regions dominated by short, impersistent grades.

Criteria	JORC Code explanation	Commentary
Dimensions	<i>The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource.</i>	The Golden Wings Mineral Resource area extends over a strike length of 840m (from 528,950mE – 529,790mE) and includes the 175m vertical interval from 430mRL to 255mRL.

Estimation and modelling techniques	<i>The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used.</i> <i>The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data.</i> <i>The assumptions made regarding recovery of by-products.</i> <i>Estimation of deleterious elements or other non-grade variables of economic significance (eg sulphur for acid mine drainage characterisation).</i> <i>In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed.</i> <i>Any assumptions behind modelling of selective mining units.</i> <i>Any assumptions about correlation between variables.</i> <i>Description of how the geological interpretation was used to control the resource estimates.</i> <i>Discussion of basis for using or not using grade cutting or capping.</i> <i>The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available.</i>	Grade estimation was by Uniform Conditioning (UC) with a post-processing localization step (localized Uniform Conditioning or LUC). This is a non-linear estimation method based on discrete Gaussian change of support applied to an underlying Ordinary Kriged (panel) model. LUC was selected based on consideration of the nature of the mineralisation and the sampling statistics. The mineralisation was divided into 2 domains. In each domain, the influence of extreme grades was examined prior to panel model estimation. Extreme grades were capped based on analysis of the change in coefficient of variation (CV) as the capping grade decreased. The capping value was set where the rate of change stabilised. Variogram models were developed for the largest (southern) domain and adopted for the northern domain. Experimental variograms for the northern domain were poorly structured due to low sample numbers. SD2 adopted the southern variogram model based on proximity and statistical similarity between the 2 zones. Estimation was completed in Datamine Studio RM (v1.6.87.0) This estimate was compared to the 2019 estimate; and the operation's grade control model. This estimate was compared to recent production from Golden Wings; however, the blending of Golden Wings ore with 2 other sources precludes any meaningful outcome. This estimate was compared to the shapes and volumes of dig blocks developed by the mine geology team during grade control. While not conclusive, the predicted ore/waste showed a high correlation to the dig block design geometry and volume. No by-products were modelled or are anticipated
---	--	---

Criteria	JORC Code explanation	Commentary
		No deleterious elements were estimated or anticipated. The major contributors to economic performance are gold grade and material type (oxidation). UC panel size was set to 10m x 5m x 5m (XYZ) and LUC sub-blocks (SMU) to 10m x 5m x 2.5m (XYZ). The panel size is approximately equal to the final grade control drill hole spacing and 50% of the resource definition drill hole spacing. The selective mining unit (SMU) was defined after discussions with site personnel and reflects the minimum volume that would be blocked out during grade control. The search range was dictated by the variogram model. The search was in three passes. In the first pass search ranges were twice the variogram range reflecting the high nugget and steep slope of the variogram near the origin. For blocks not estimated in the first pass the range was increased by a factor of 2 and a further factor of 2 for the third pass (if required). 87.5% of panels were estimated in the first pass, 12% in the second pass and 0.5% in the third pass. Average estimated grades for passes 2 and 3 are 25% and 32% lower than grades estimated in pass 1 indicating that the wider-spaced data (bigger search range) is concentrated in lower grade areas of the mineralisation. This is consistent with the underlying data spatial distribution.
Moisture	<i>Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.</i>	Tonnages and grades were estimated on a dry, in situ basis

Criteria	JORC Code explanation	Commentary
<i>Cut-off parameters</i>	<i>The basis of the adopted cut-off grade(s) or quality parameters applied.</i>	The resource is reported above 0.3 g/t Au. This cut-off reflects the economic cut-off currently used by GCY in the open pit operation. As such, the cut-off is consistent with the 'reasonable prospects' test required under the JORC Code.
<i>Mining factors or assumptions</i>	<i>Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.</i>	The Golden Wings resource estimate is based on the following assumptions: Open pit mining SMU 10m x 5m x 2.5m (XYZ) Good mining practice and mining equipment consistent with the SMU size such that mining losses and dilution are minimized The current (April 2020) open pit design, and Mining concurrent with production from the nearby Gilbey's open pit.

Criteria	JORC Code explanation	Commentary
<i>Metallurgical factors or assumptions</i>	<i>The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made.</i>	The Golden Wings resource estimate is based on an assumption that there is sufficient 'hard rock' ore from the adjacent Gilbey's open pit to blend with Golden Wings. This blending is required due to the high clay content at Golden Wings. Treating the Golden Wings mineralisation in isolation would most likely incur increased materials handling costs in the crushing and grinding circuit. Metallurgical performance is supported by the current Golden Wings operation and metallurgical tests completed during the feasibility study. When material above the cut-off grade is treated (in a blend) the ore treatment plant performance is in line with expectations. If large volumes of below cut-off are included in the blend metallurgical performance is adversely impacted. Metallurgical samples collected during the feasibility study indicate very high recoveries from both oxidized and fresh material (between 95% and 98%).
<i>Environmental factors or assumptions</i>	<i>Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.</i>	GCY have the required environmental approvals for the Golden Wings operation. SD2 is unaware of any material changes or past performance issues likely to impact on approval to mine Golden Wings.

Criteria	JORC Code explanation	Commentary
Bulk density	<i>Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples.</i> <i>The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit.</i> <i>Discuss assumptions for bulk density estimates used in the evaluation process of the different materials.</i>	No bulk density samples are available for Golden Wings. Limited sampling exists at the nearby Gilbey's open pit and the results of conventional Archimedes analysis of the Gilbey's samples have been adopted for Golden Wings. In situ bulk density is assigned by material type (Oxide, transition, fresh). Oxidation boundaries are interpreted from geological logs of the drill hole data. Oxide is assigned a bulk density of 2.0 g/cm. Transition is assigned a bulk density of 2.4 g/cm and fresh is assigned a bulk density of 2.8. To date, the tonnage reconciliation from the combined Gilbey's and Golden Wings ore fed to the ore treatment plant has been between 97% and 103%. While Golden Wings is a relatively small proportion of the blend and to date production has been from the oxide zone only, the close correlation between the mine and mill tonnes supports the assigned bulk density.

Criteria	JORC Code explanation	Commentary
Classification	<i>The basis for the classification of the Mineral Resources into varying confidence categories.</i> <i>Whether appropriate account has been taken of all relevant factors (ie relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data).</i> <i>Whether the result appropriately reflects the Competent Person's view of the deposit.</i>	There is no Measured Resource at Golden Wings. The resource has been classified as Indicated or Inferred after consideration of sample quality and quantity, the geological setting, database integrity, the dimensions of the mineralisation, and recent mining activities. SD2 developed a classification surface separating Indicated and Inferred Resources. This surface was modeled in 3D and blocks above classified as Indicated while block below were classified as Inferred. The classification surface was driven by the sample-to-block geometry. In areas of closely spaced drilling (more than 10 samples within 8m) the resource was classified as Indicated. SD2 consider this level of data support sufficient to assume geological continuity between points of observation. Areas where there were more than 10 samples within 15m were classified as Inferred. SD2 consider this level of data support sufficient to imply but not verify geological continuity. Regions of the deposit where there are less than 10 samples within a 15m radius were not classified and have been excluded from the resource tabulation.
Audits or reviews	<i>The results of any audits or reviews of Mineral Resource estimates.</i>	No audit/review has been completed for SD2's Golden Wings 2020 Resource estimate. The methodology adopted for this 2020 estimate is substantially the same as the approach used in 2019. The change in estimation approach used in this estimate compared to the 2017 resource was driven in part by multiple reviews of the 2017 model including reports by SD2, GCY and RPM.

Criteria	JORC Code explanation	Commentary
<i>Discussion of relative accuracy/ confidence</i>	<i>Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate.</i> <i>The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used.</i> <i>These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.</i>	As a part of the 2020 mineral resource estimate, SD2 conducted tonnes and grade sensitivity analysis. This analysis was based on investigating different geological interpretations and applying different SMUs, search and estimation parameters. The sensitivity analysis shows that the key drivers for the resource are: The geological interpretation and continuity assumptions and The grade capping applied to the estimate For a given geological interpretation the sensitivity modelling showed a grade precision of +/- 10%. While this is not a statistical confidence limit test it demonstrates the likely range of resource grades. Different domaining assumptions were much more variable and outcomes were dependent on the type of interpretation applied, for example unconstrained implicit modelling using naïve Leapfrog Geo shapes showed a massive (and unrealistic) increase in tonnes. The current domain volume is a close match to grade control dig block volumes, locations and geometry and is therefore, in SD2's opinion, the most appropriate choice of geological interpretation in the absence of conflicting data. No meaningful reconciliation data is available for past Golden Wings production. Golden Wings is part of a blend being fed to the ore treatment plant and the uncertainty associated with assumptions required to back allocate tonnes and grade to each operation outweighs the precision of the estimates.