

GROUP EXPLORATION UPDATE

KEY POINTS

- New zone of strong copper mineralisation identified in drilling approximately 150 metres below the current Kairos resource (previously known as Peak Deeps):
 - **25 metres at 3.0% Cu & 9g/t Ag, including 12 metres at 4.1% Cu & 11g/t Ag**
- Additional high grade base metal and gold intercepts encountered in the lower Kairos area, including:
 - **19 metres at 19.7% Pb+Zn, 4.3g/t Au & 0.6% Cu**
 - **16 metres at 17.8% Pb+Zn, 1.7g/t Au & 0.1% Cu**
 - **9 metres at 18.1% Pb+Zn, 5.3g/t Au & 1.7% Cu**
- Further strong mineralisation intercepted in follow-up drilling at the Federation prospect south of Hera including:
 - **20 metres at 11.9% Pb+Zn & 4g/t Ag**
 - **4.7 metres at 15.0% Pb+Zn & 18g/t Ag**
 - **4.9 metres at 12.0% Pb+Zn & 3g/t Ag**
- Broad zones of shallow oxide gold mineralisation also intercepted in RC drilling at Federation:
 - **20 metres at 0.72g/t Au** (from 12m down hole)
 - **50 metres at 0.51g/t Au** (from 41m down hole)

Aurelia's Executive Chairman & Acting CEO, Cobb Johnstone, commented: "The identification of strong mineralisation 150 metres below the known extent of Kairos is a standout result. Further encouraging intercepts at Federation also continue to support economic potential within this large-scale mineralised system. We remain firmly focused on investing in the life and margin of our existing assets."

Aurelia Metals Limited ("AMI" or the "Company") is pleased to provide an update on current exploration activities in the Kairos area at the Peak Mine and at the Federation and Main Southeast areas near the Hera Mine.

STRONG COPPER MINERALISATION DISCOVERED BELOW KAIROS

Following identification of high grade gold and base metal mineralisation at Kairos (previously known as Peak Deeps), as announced by AMI in February 2019, intensive follow-up work has been conducted. This includes additional infill and extensional drilling, Resource and Reserve estimation, development and mine planning, and commencement of a dedicated decline from the top of the Perseverance workings to expedite mining access to the area.

As a part of this work, deeper drilling has recently been conducted to test the area below the known Kairos mineralisation. Assay results have now been returned for UD19PK0140 and include the following:

UD19PK0140	25 metres at 3.0% Cu & 9g/t Ag from 513m, <i>includes</i> 12 metres at 4.1% Cu & 11g/t Ag from 518m
------------	--

The strong copper mineralisation in this hole is located 150 metres below, and slightly east, of the current Kairos Resource (**Figure 1**). While the Kairos lode itself is hosted in altered sediments, this intercept is associated with sheared rhyolite (**Figure 2**). The position of the rhyolite was previously unknown at this depth in the Peak/Kairos area. The association with rhyolite is considered by

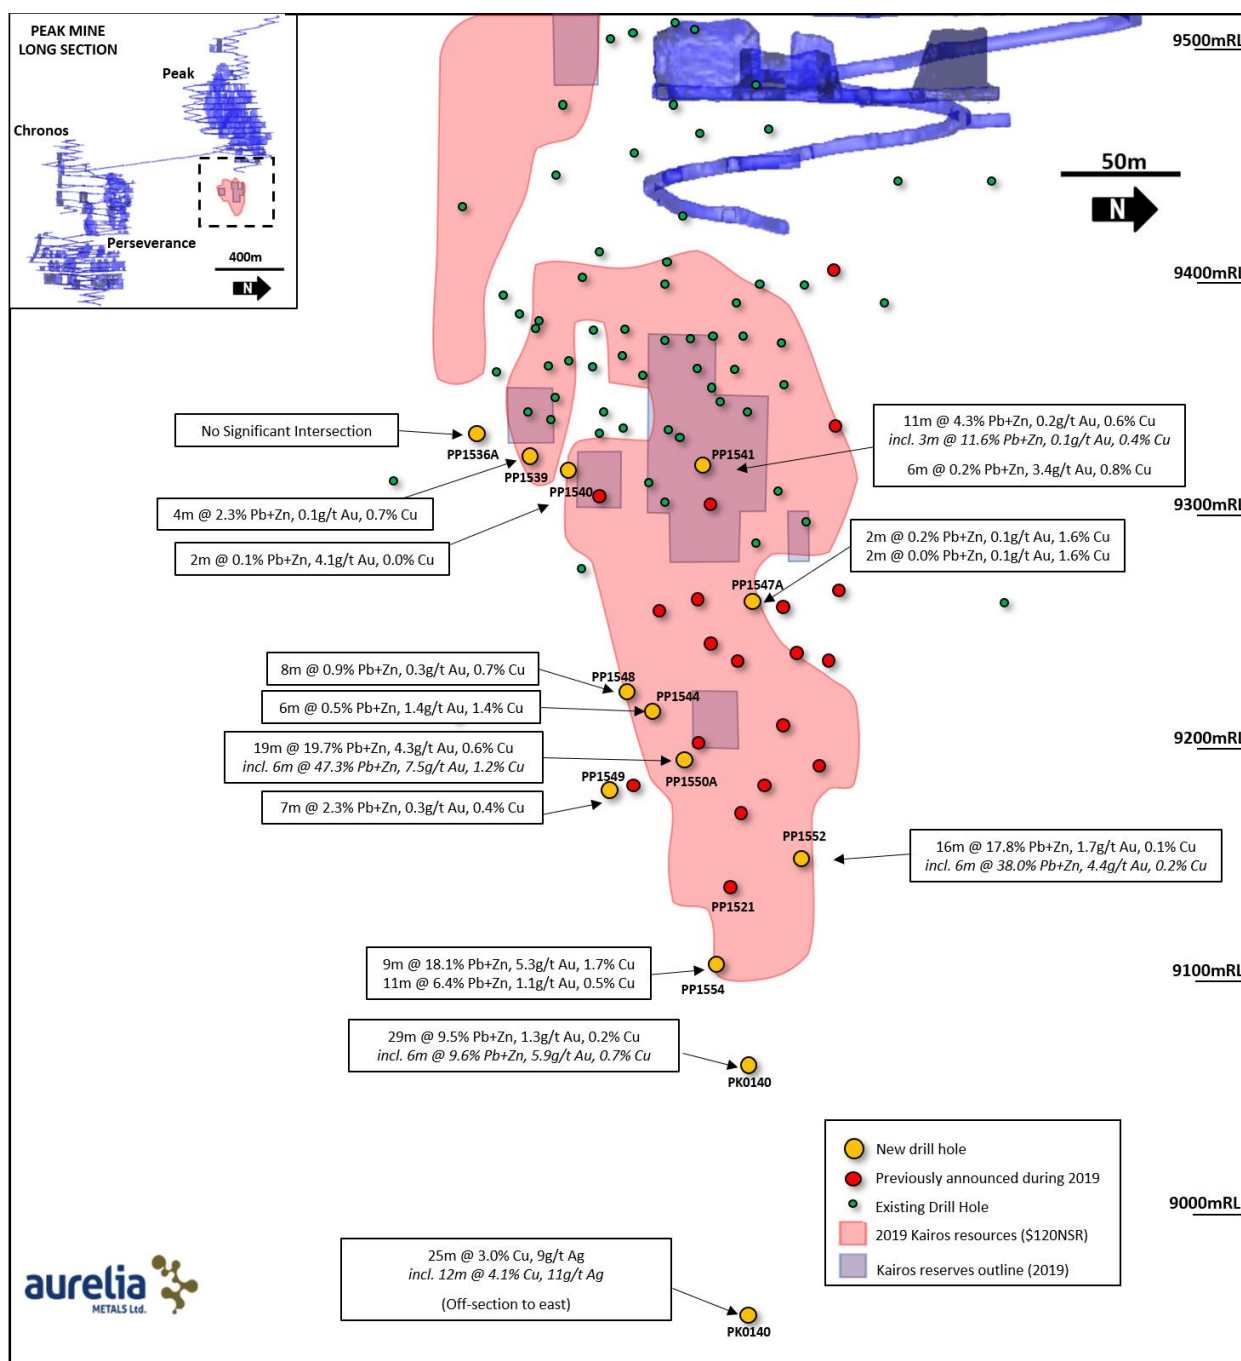


Figure 1. Long section of the Kairos area showing significant results received since the last update (April 2019).

Aurelia's geologists to be potentially significant as the high-value Peak orebody (directly above) and Perseverance orebody (800 metres to the south) are hosted within or close to rhyolite contacts.

Further to the copper mineralisation intercepted at depth, infill and extensional drilling of the Kairos lode itself has returned additional strong base metal and gold intercepts, including:

- UD19PP1550A 19m at **19.7% Pb+Zn, 4.3g/t Au, 20g/t Ag & 0.6% Cu** from 290m, *incl. 6m at 47.3% Pb+Zn, 7.5g/t Au, 47g/t Ag & 1.2% Cu* from 303m
- UD19PP1552 16m at **17.8% Pb+Zn, 1.7g/t Au, 18g/t Ag & 0.1% Cu** from 298m, *incl. 6m at 38.0% Pb+Zn, 4.4g/t Au, 40g/t Ag & 0.2% Cu* from 306m
- UD19PP1554 9m at **18.1% Pb+Zn, 5.3g/t Au, 24g/t Ag & 0.2% Cu** from 356m

UD19PK0140

29m at **9.5% Pb+Zn, 1.3g/t Au, 19g/t Ag & 0.2% Cu** from 388m, *incl.* 6m at **9.6% Pb+Zn, 5.9g/t Au, 41g/t Ag & 0.7% Cu** from 388m, and 3m at **28.8% Pb+Zn, 0.2g/t Au, 68g/t Ag & 0.3% Cu** from 397m, and 5m at **15.0% Pb+Zn, 0.1g/t Au, 9g/t Ag** from 410m

Full drill hole details are given in **Table 1**, and a list of new significant intersections for the Kairos area associated with this release are detailed in **Table 2**. The results continue to show the high grade potential of the Kairos lode, with intercepts in UD19PP1554 and UD19PK0140 extending the Pb-Zn-Au mineralised zone down at least 100 metres below previous drilling (**Figure 1**).

The Kairos zone remains highly prospective and is currently open in a number of directions, with exploration ongoing in the upper and lower parts of the system. The steep holes required to test the area at depth have resulted in more challenging drilling conditions and the Company is reviewing the best options for follow-up in the area.

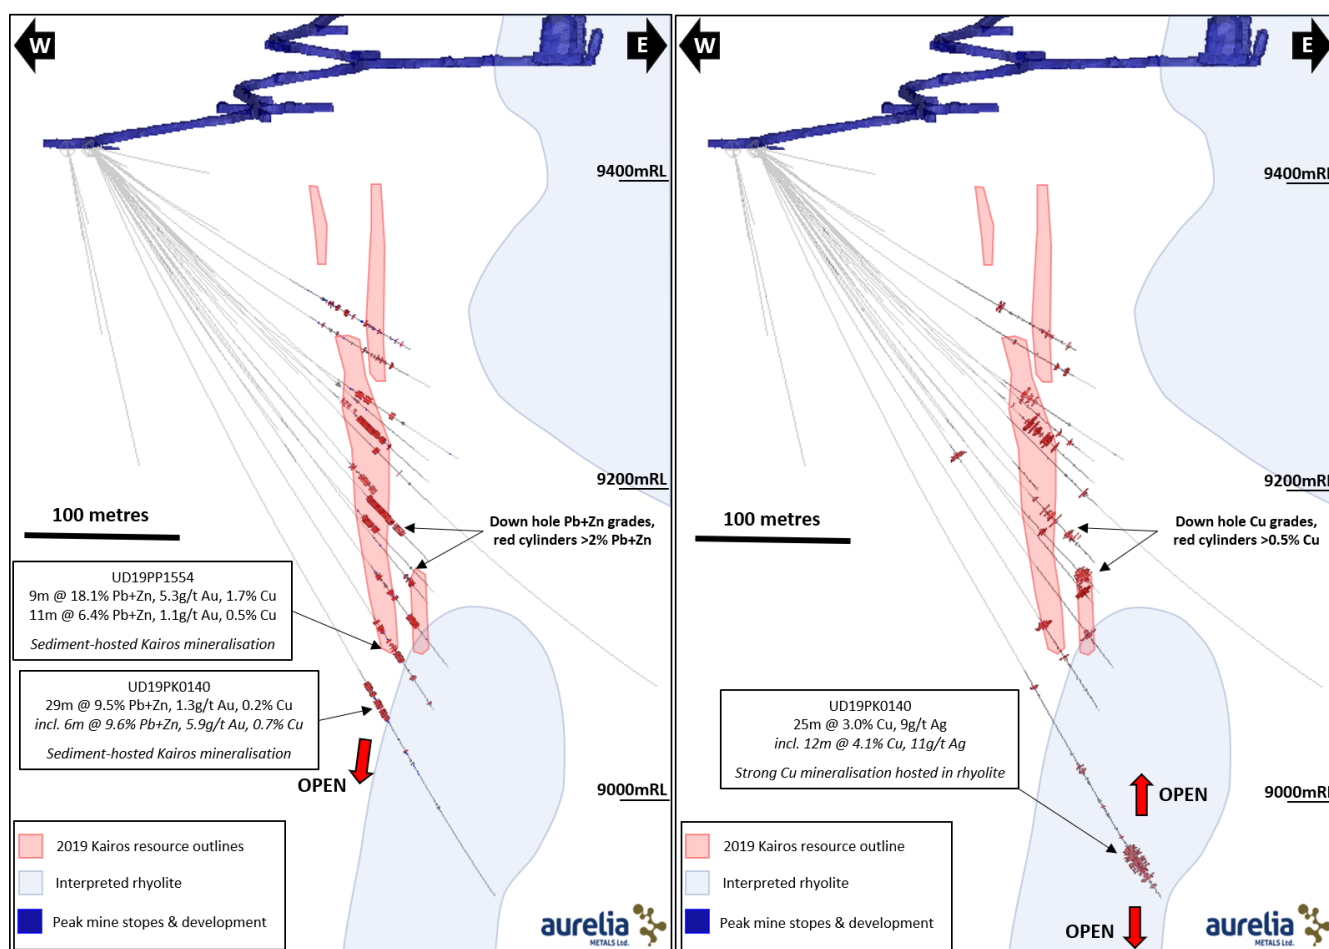


Figure 2. North-looking cross sections through the Kairos area showing recent AMI drilling with down hole Pb+Zn (left) and Cu (right).

FURTHER STRONG MINERALISATION INTERCEPTED AT FEDERATION

Following the announcement of the discovery of high grade base metal mineralisation at Federation in May this year (ASX release 6 May 2019), the Company has been testing the depth potential of the prospect with a number of additional diamond holes completed. New results from Federation include:

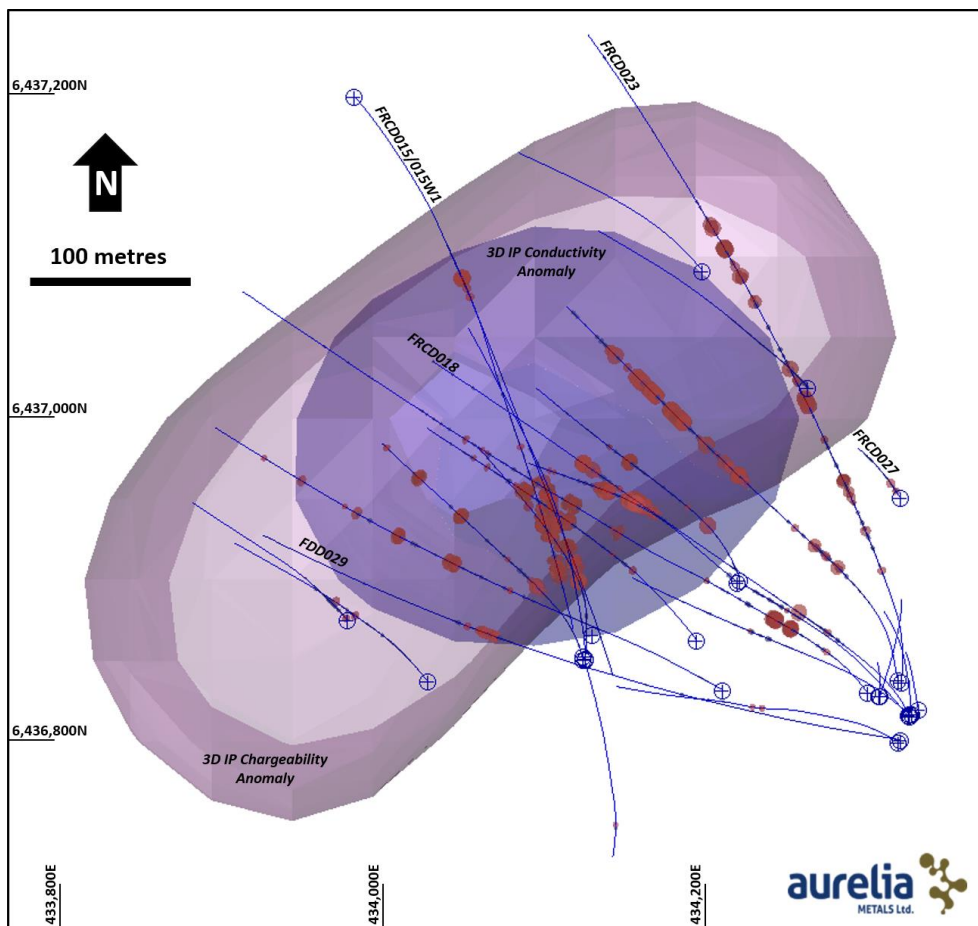


Figure 3. Plan showing IP chargeability and conductivity anomalies at Federation along with RC and diamond drilling. Red discs on drill holes are Pb+Zn>1%. New holes discussed in this release are labelled.

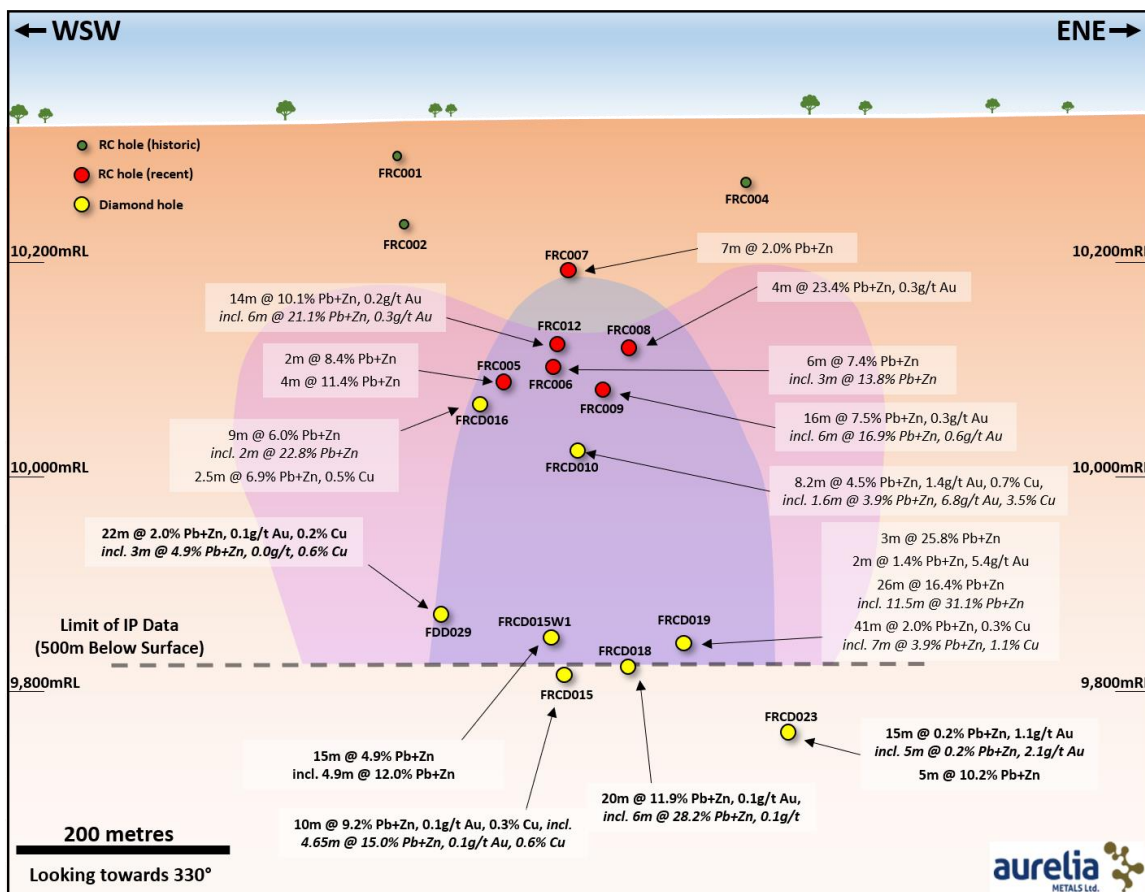


Figure 4. Long section looking towards 330° (NNW) showing the modelled 3D IP chargeability and conductivity anomalies at Federation with drilling to date. New assay results are highlighted in bold.

FRC018	20 metres at 11.9% Pb+Zn, 0.1g/t Au & 4g/t Ag from 517m, <i>incl.</i> 6 metres at 28.2% Pb+Zn, 0.1g/t Au & 10g/t Ag from 530m
FRC015	10 metres at 9.2% Pb+Zn, 0.1g/t Au, 19g/t Ag & 0.3% Cu from 567m, <i>incl.</i> 4.65 metres at 15.0% Pb+Zn, 0.1g/t Au & 18g/t Ag & 0.6% Cu from 568.35m
FRC015W1	15 metres at 4.9% Pb+Zn & 2g/t Ag from 573m, <i>incl.</i> 4.9 metres at 12.0% Pb+Zn & 3g/t Ag from 578.9m
FRC023	4 metres at 0.2% Pb+Zn & 2.1g/t Au from 243m 5 metres at 10.2% Pb+Zn & 26g/t Ag from 615m

A full list of drill hole details for the Federation drilling is given in **Table 1**, and a list of new significant intersections is given in **Table 3**.

The new drilling extends over a strike length of 300 metres, with the majority of intercepts occurring between 400 and 550 metres below surface (**Figures 3 & 4**). The mineralisation remains open at depth, with the area below the central high grade portion of the deposit (defined by holes FRC015, 018 and 019) currently being followed-up by diamond drilling.

In addition to the high grade base metals at depth, shallow oxide gold mineralisation has also been intercepted for the first time on the eastern side of the Federation prospect. FRC027 was designed as an RC pre-collar (see **Figure 3** for location), reaching the relatively shallow depth of 96 metres and returning the following intercepts:

FRC027	20 metres at 0.72g/t Au & 0.5% Pb+Zn from 12m, <i>includes</i> 7 metres at 1.28g/t Au & 0.3% Pb+Zn from 20m
	50 metres at 0.51g/t Au & 0.2% Pb+Zn from 41m, <i>includes</i> 2 metres at 1.26g/t Au & 0.1% Pb+Zn from 54m, and 3 metres at 1.67g/t Au & 0.3% Pb+Zn from 76m, and 6 metres at 1.03g/t Au & 0.2% Pb+Zn from 84m

The width and shallow depths of the mineralisation in this hole are encouraging, with follow-up exploration planned. The gold mineralisation in FRC027 is unconstrained to the east and north.

HERA MAIN SOUTHEAST EXPLORATION UPDATE

In June 2019 the Company announced that it had intercepted a new zone of sulphide mineralisation along strike to the south of the Hera trend (ASX release 12 June 2019). The mineralisation is down-plunge from the known Main Southeast lode and represents a step-down of 150-200 metres.

To date, a parent hole (HRD065) and seven daughter wedge holes have been drilled in the area (**Figure 5**). Assay results have now been returned for a further five of the wedge holes, including:

HRD065W2	24 metres at 6.1% Pb+Zn, 0.1g/t Au, 13g/t Ag & 0.7% Cu from 903m, <i>incl.</i> 5 metres at 11.1% Pb+Zn, 0.1g/t Au, 28g/t Ag & 1.5% Cu from 922m
HRD065W6	4.25 metres at 15.9% Pb+Zn, 0.5g/t Au, 54g/t Ag & 3.0% Cu from 910.75m
HRD065W5	5 metres at 5.7% Pb+Zn, 28g/t Ag & 0.8% Cu from 823m, <i>incl.</i> 2 metres at 11.4% Pb+Zn, 54g/t Ag & 0.8% Cu from 824m

A full list of drill hole details for the Hera Main Southeast drilling is given in **Table 1**, and a list of new significant intersections is given in **Table 4**. Results are still pending for the final hole HRD065W7. The mineralisation at Main Southeast remains open to the south and up- and down-plunge, with AMI geologists currently undertaking a review of the resource potential and exploration upside in the area.

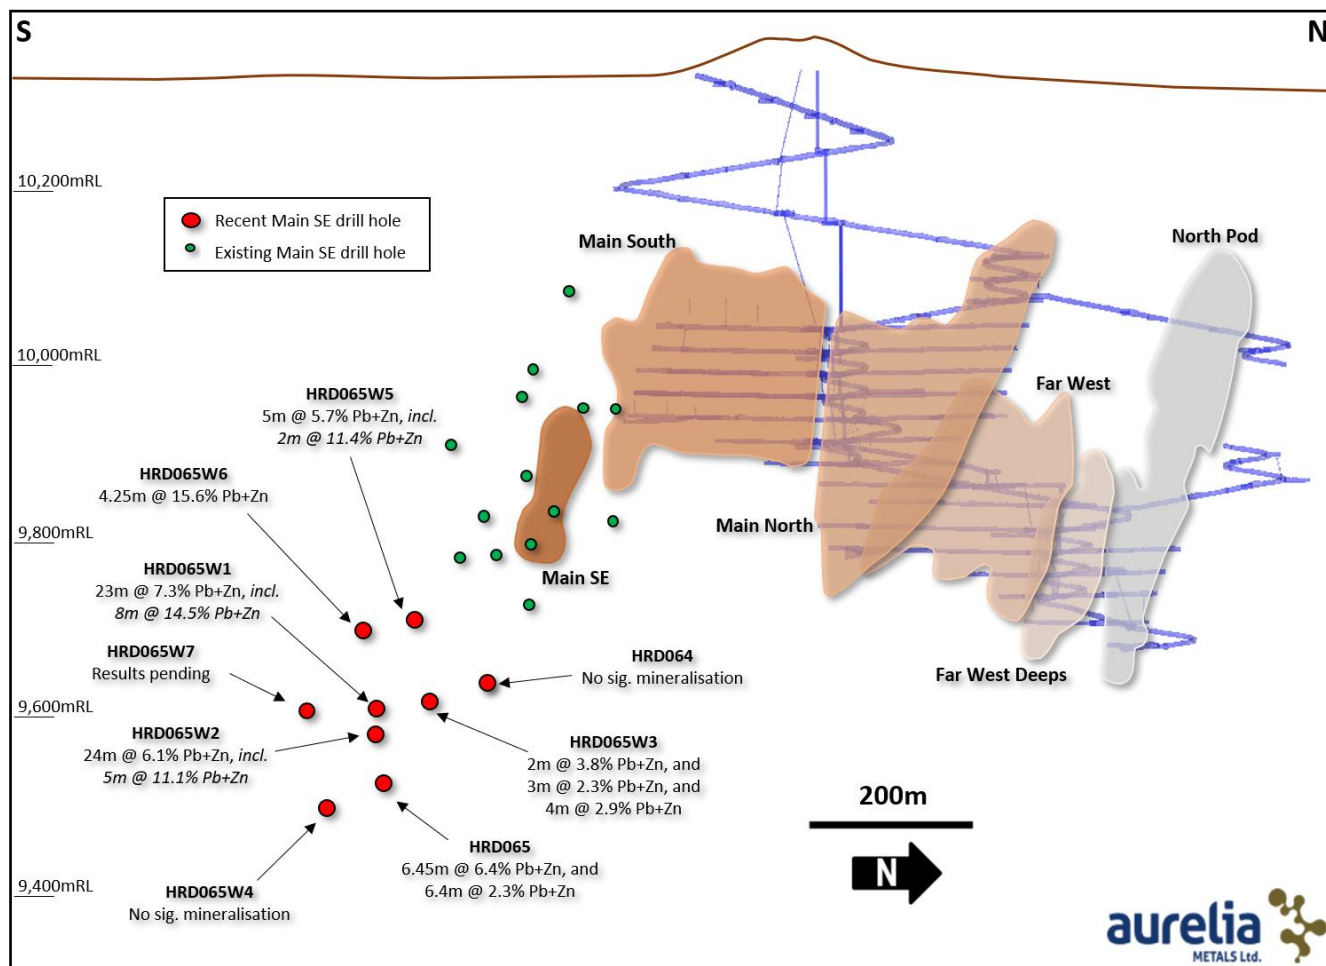


Figure 5. Long section showing recent drilling in the Main Southeast area in reference to the existing Hera lodes and development.

Further Information

Cobb Johnstone

Executive Chairman and Acting CEO

+61 2 6363 5200

COMPETENT PERSONS STATEMENT

The information in this report that relates to Exploration Results is based on information compiled by Adam McKinnon, BSc (Hons), PhD, who is a Member of the Australasian Institute of Mining and Metallurgy. Dr McKinnon is a full-time employee of Aurelia Metals and has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves.' Dr McKinnon consents to the inclusion in this report of the matters based on his information in the form and context in which it appears.

Table 1. Collar summary for the drill holes reported in this release.

Prospect	Type	Hole ID	Easting (MGA)	Northing (MGA)	Local RL (m)	DIP	Azimuth (MGA)	Total Depth (m)
Kairos	UG DDH	UD19PP1536A	393325	6507353	9424	-27.0	119.0	270
Kairos	UG DDH	UD19PP1539	393325	6507353	9424	-32.0	116.0	270
Kairos	UG DDH	UD19PP1540	393325	6507353	9424	-34.0	109.0	260
Kairos	UG DDH	UD19PP1541	393325	6507353	9424	-38.0	93.0	265
Kairos	UG DDH	UD19PP1544	393325	6507353	9424	-53.0	97.0	330
Kairos	UG DDH	UD19PP1547A	393325	6507353	9424	-45.7	80.9	299
Kairos	UG DDH	UD19PP1548	393325	6507353	9424	-52.0	102.5	381.5
Kairos	UG DDH	UD19PP1549	393325	6507353	9424	-55.0	102.0	365
Kairos	UG DDH	UD19PP1550A	393325	6507353	9424	-56.0	96.0	375
Kairos	UG DDH	UD19PP1552	393325	6507353	9424	-59.5	78.5	366.5
Kairos	UG DDH	UD19PP1554	393325	6507353	9424	-64.0	95.0	428
Kairos	UG DDH	UD19PK0140	393326	6507353	9424	-67.0	86.0	554.1
Federation	RC/DDH	FRCD015	433988	6437199	10318	-70.1	128.9	750.7
Federation	RC/DDH	FRCD015W1	433988	6437199	10318	-70.1	128.9	624.9
Federation	RC/DDH	FRCD018	434332	6436816	10326	-75.0	337.0	831.1
Federation	RC	FRC020	434331	6436816	10326	-60.0	317.0	216
Federation	RC	FRC021	434332	6436817	10326	-68.0	312.3	309
Federation	RC	FRC022	434333	6436817	10326	-65.0	355.0	162
Federation	RC/DDH	FRCD023	434327	6436837	10326	-66.0	5.0	906.5
Federation	RC	FRC024	434337	6436820	10326	-65.0	350.0	93
Federation	RC	FRC025	434313	6436828	10326	-75.0	0.0	96
Federation	RC	FRC026	434314	6436828	10326	-60.0	15.3	138
Federation	RC	FRC027	434326	6436951	10324	-70.0	325.0	96
Federation	DDH	FDD029	434327	6436801	10326	-60.0	279.0	749.2
Main SE	DDH	HRD065	436066	6446602	10313	-66.0	76.3	1065.6
Main SE	DDH	HRD065W1	436066	6446602	10313	-66.0	76.3	1029.8
Main SE	DDH	HRD065W2	436066	6446602	10313	-66.0	76.3	978.8
Main SE	DDH	HRD065W3	436066	6446602	10313	-66.0	76.3	994.3
Main SE	DDH	HRD065W4	436066	6446602	10313	-66.0	76.3	1241.4
Main SE	DDH	HRD065W5	436066	6446602	10313	-66.0	76.3	1020
Main SE	DDH	HRD065W6	436066	6446602	10313	-66.0	76.3	1032
Main SE	DDH	HRD065W7	436066	6446602	10313	-66.0	76.3	1130

Table 2. Significant new intersections for the Kairos drill holes reported in this release.

Hole ID	Interval (m)	Est. True Width (m)	Pb (%)	Zn (%)	Au (g/t)	Ag (g/t)	Cu (%)	NSR* (\$)	From (m)
UD19PP1536A	No Significant Intersections								
UD19PP1539	4	3.3	0.6	1.7	0.1	5	0.7	\$45	200
UD19PP1540	2	1.7	0.1	0.1	4.1	0	0.0	\$193	216
UD19PP1541 <i>includes</i>	11	9.4	1.0	3.3	0.2	4	0.6	\$52	188
	3	2.5	2.7	9.0	0.1	7	0.4	\$207	196
	6	5.2	0.1	0.2	3.4	2	0.8	\$207	223
UD19PP1544	6	3.8	0.2	0.3	1.4	4	1.4	\$154	311
UD19PP1547A	2	1.5	0.1	0.1	0.1	8	1.6	\$102	269
	2	1.5	0.0	0.0	0.1	5	1.6	\$100	278
UD19PP1548	8	5.2	0.2	0.7	0.3	3	0.7	\$54	300
UD19PP1549	7	4.1	1.8	0.5	0.3	8	0.4	\$40	322
UD19PP1550A <i>includes</i>	19	12.7	7.3	12.4	4.3	20	0.6	\$579	290
	6	4	18.1	29.2	7.5	47	1.2	\$1,311	303
	11	7.4	1.8	2.1	0.1	6	0.3	\$43	316
UD19PP1552 <i>includes</i>	16	10.2	7.2	10.6	1.7	18	0.1	\$416	298
	6	3.8	15.6	22.4	4.4	40	0.2	\$977	306
UD19PP1554	9	4.8	6.5	11.7	5.3	24	1.7	\$584	356
	11	6	4.0	2.4	1.1	12	0.5	\$142	378
	3	1.6	2.4	3.8	0.1	7	0.5	\$90	401
UD19PK0140 <i>includes</i> <i>and</i> <i>and</i> <i>includes</i>	29	14.2	3.9	5.6	1.3	19	0.2	\$219	388
	6	2.9	4.0	5.6	5.9	41	0.7	\$441	388
	3	1.4	15.1	13.7	0.2	68	0.3	\$597	397
	5	2.4	4.4	10.5	0.1	9	0.0	\$281	410
	25	13.4	0.0	0.0	0.0	9	3.0	\$194	513
	12	6.3	0.0	0.0	0.0	11	4.1	\$263	518

*Net Smelter Return ('NSR') is the Company's estimate based on factors including metals prices, metallurgical recoveries, payabilities and other offsite costs. Full details of the basis of the Company's NSR calculations are set out in the report "Mineral Resource and Ore Reserve Statement - June 2019" released to the ASX on 22 July 2019, a copy of which is available to view at www.aureliametals.com.au.

Table 3. Significant new intersections for the Federation drill holes reported in this release.

Hole ID	Interval* (m)	Pb (%)	Zn (%)	Pb+Zn (%)	Au (g/t)	Ag (g/t)	Cu (%)	From (m)
FRC015	2	1.1	1.1	2.1	0.01	5	0.1	306
	2	0.7	0.7	1.4	0.01	3	0.0	330
	10	4.2	5.0	9.2	0.07	19	0.3	567
	<i>includes</i> 4.65	4.8	10.2	15.0	0.14	18	0.6	568.35
	10	0.6	0.9	1.5	0.02	3	0.0	594
	11	0.6	1.0	1.6	0.01	1	0.0	637
FRC015W1	4.1	2.0	1.6	3.5	0.01	10	0.0	301.9
	25	0.6	1.1	1.6	0.02	1	0.0	531
	15	1.3	3.7	4.9	0.02	2	0.0	573
	<i>includes</i> 4.9	3.0	8.9	12.0	0.03	3	0.0	578.9
FRC018	1	0.4	0.9	1.3	0.01	1	0.0	227
	1	1.5	1.4	3.0	0.01	4	0.0	276
	<i>includes</i> 20	3.9	8.0	11.9	0.07	4	0.0	517
	6	9.1	19.1	28.2	0.11	10	0.1	530
	3	2.4	4.1	6.5	0.01	4	0.0	611
FRC020	1	0.2	0.3	0.5	0.79	1	0.0	165
	1	0.4	0.8	1.1	0.02	1	0.0	176
FRC021	No significant intercepts							
FRC022	No significant intercepts							
FRC023	15	0.1	0.1	0.2	1.11	0	0.0	236
	<i>includes</i> 4	0.1	0.1	0.2	2.09	0	0.0	243
	5	0.6	1.1	1.7	0.02	1	0.1	290
	13	0.7	1.0	1.8	0.01	1	0.0	398
	2	0.9	1.5	2.4	0.01	2	0.1	449
	5	0.4	1.4	1.8	0.01	2	0.0	576
	5	2.8	7.4	10.2	0.03	26	0.0	615
	8	0.9	1.3	2.2	0.02	3	0.0	644
FRC024	No significant intercepts							
FRC025	No significant intercepts							
FRC026	No significant intercepts							
FRC027	20	0.4	0.1	0.5	0.72	1	0.0	12
	<i>includes</i> 7	0.2	0.0	0.3	1.28	1	0.0	20
	50	0.1	0.1	0.2	0.51	0	0.0	41
	<i>includes</i> 2	0.1	0.1	0.1	1.26	0	0.0	54
	<i>and</i> 3	0.1	0.2	0.3	1.67	0	0.0	76
	<i>and</i> 6	0.1	0.1	0.2	1.03	0	0.0	84
FDD029	22	1.1	0.9	2.0	0.09	3	0.2	476
	<i>includes</i> 3	2.5	2.4	4.9	0.04	6	0.6	490

*Down hole widths – true widths are currently undefined.

Table 4. Significant new intersections for the Hera Main Southeast holes reported in this release.

Hole ID	Interval* (m)	Pb (%)	Zn (%)	Pb+Zn (%)	Au (g/t)	Ag (g/t)	Cu (%)	From (m)
HRD065W2 <i>includes</i>	24	2.2	3.9	6.1	0.1	13	0.7	903
	5	4.6	6.4	11.1	0.1	28	1.5	922
	5	1.4	1.0	2.4	0.0	21	0.7	930
HRD065W3	2	1.4	2.4	3.8	0.0	6	0.1	827
	3	0.6	1.7	2.3	0.0	2	0.0	860
	4	1.4	1.5	2.9	0.1	4	0.0	936
HRD065W4	2	0.3	0.4	0.8	0.0	1	0.0	946
	0.5	0.4	1.1	1.5	0.0	2	0.1	1013
HRD065W5 <i>includes</i>	5	4.4	1.3	5.7	0.0	28	0.8	823
	2	9.3	2.1	11.4	0.0	54	0.8	824
HRD065W6	4.25	8.0	7.8	15.9	0.5	54	3.0	910.75
	6	0.4	0.9	1.4	0.0	2	0.0	928
HRD065W7	Results pending							

*Down hole widths – true widths are currently undefined.

Kairos

JORC Code 2012 (Table 1) - Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. AusIMM.

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <i>Nature and quality of sampling (e.g. cut channels, random chips or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i> 	<p>Underground exploration and resource definition at Peak Gold Mines utilises diamond drill holes in fresh rock with close to 100% recovery. The core is predominantly BQ or LTK48 where resource definition is undertaken and is whole core sampled at metre intervals. NQ2 core is used for underground exploration and evaluation and is half core sampled in metre intervals. PGM has employed Swick Mining Services since 2008 as their preferred underground drilling contractor to maintain quality in core handling. The core is processed in an established core yard with racks, water and cover.</p>
	<ul style="list-style-type: none"> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> 	<p>A continuous series of pre-numbered bags is employed so that duplication of sample numbers is not likely. Computer control of core yard systems for ledger generation and specific gravity. Drilling run errors affecting mark-up are dealt with by the contractor crew responsible ensuring they take more care. All samples are analysed for specific gravity. Sample weights show consistency with regards to core recovery. Standards are submitted at a frequency of 1 in 20 with every submission. A blank is put at the beginning of every job. Silica flushes are used between samples around visible gold observations. Standard fails are subject to re-assay. A selection of pulps is taken yearly from the ore intervals for re-assay at another lab as a comparison of repeatability and lab precision. The core saw equipment is regularly inspected and aligned so the core is cut in even halves.</p>
	<ul style="list-style-type: none"> <i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<p>Up to 100% of the core can be sampled but is generally restricted to all intervals which have alteration, mineralisation and shearing. Sampling is continuous and perpendicular to strike of the lodes reported. The entire metre of whole BQ or half NQ is completely crushed to 3mm and 100g is riffle split and pulverised to 90% passing 75 microns. All gold assays are 50g fire assay (Method Au – AA26) with a detection level of 0.01ppm and base metals by 4 acid digest (method ME-ICP61) with detection levels of: Ag-0.5ppm, Cu-0.01ppm, Pb-0.01ppm, Bi-1ppm, Zn-0.01ppm, S-0.01%, Fe-0.01%. Over limit analysis is by OG62- with Sulphur over range by method S-IR08 at ALS laboratories. Every core sample submitted for assay is submitted for specific gravity analysis at PGM by wet balance method (Archemedes method). The SG process is checked with a standard 1 in 20 and water temperature is also recorded.</p>

<p>Drilling techniques</p>	<ul style="list-style-type: none"> • <i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).</i> 	<p>The variety of core sizes (LTK48, BQ, NQ2 and HQ) are used at the Peak Mines depending on drill hole spacing, depth and angle of hole. The holes are surveyed every 30m with a 15m survey at the beginning of the hole and end of hole survey. The holes are drilled with a jumbo mounted LM90 diamond rig supplied by SMS drilling.</p>
<p>Drill sample recovery</p>	<ul style="list-style-type: none"> • <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> • <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> • <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<p>Drillers record core loss whilst drilling with core blocks in the run. The drilling contract indicates an overall 98% recovery should be achieved in difficult drilling. In good drilling 100% recovery is required. The location of loss is also recorded on sample submission sheets. The estimated meterage of the core loss depends on how the core is pieced together. Sample weights of the assayed intervals are assessed to give another quantitative estimate of recovery.</p> <p>Generally good drilling equipment and experience is required to minimise core loss. The core is pieced together where possible, ensuring the core has been placed in the tray the right way around and is a check on the run lengths. At all times the core is handled with care with transportation using proper tie down points.</p> <p>Whole core sampling of the BQ core eliminates sample bias from having to half the core. When sampling NQ core the cut line is perpendicular to structures. There is no known relationship between sample recovery and sample grade in these samples.</p>
<p>Logging</p>	<ul style="list-style-type: none"> • <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i> 	<p>Geological domains are much larger than the mineralisation and in most cases it is possible to drill continuously through the ore zone. For mine delineation drilling lithological information is gathered to 10cm intervals into tables defining lithology, mineralisation, alteration and shearing. Mine delineation is not oriented so structural measurements are taken in relation to the regional foliation which is considered to be constantly orientated. Broader stratigraphical and structural units are captured in an interp table. All of the deposits have defined structural zones across strike. Major lithologies are wireframed to ensure continuity of the interpretation. Exploration core is oriented so structural measurements are accurate also magnetic susceptibility is measured at 1m intervals where appropriate. Rock mass quality information, to support engineering considerations, are logged and Q primed is calculated. Further to rock mass quality data, rock strength data is gathered for mining studies. Metallurgical samples are initially recovered as part of exploration or evaluation programs from either half or quarter core.</p> <p>All core is photographed. The core is photographed using a mobile frame over individual trays ensuring that light and focus conditions remain constant. Structural measurements are measured against the dominant regional S2 foliation based on quality of observation. Visual estimates of minerals in percent are checked against assay data. Magnetic susceptibility is recorded for specific intervals during exploration programs.</p> <p>All core and chips are 100% logged for lithology, stratigraphy, mineralisation, alteration, RMQ, structure, and shear using Coreview software.</p>

<p>Sub-sampling techniques and sample preparation</p>	<ul style="list-style-type: none"> • <i>If core, whether cut or sawn and whether Quarter, half or all core taken.</i> • <i>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</i> • <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> • <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> • <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> • <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<p>LTK48 and BQ core is whole core sampled so no subsampling is done on delineation drilling. NQ2 and HQ core is half core sampled and cut with an almonte automatic saw leaving the other half of the core for possible re-assay or metallurgical use.</p> <p>No non-core sampling is described in this report</p> <p>For a sample of core being assayed for grade the same regime is followed as explained in sampling techniques above.</p> <p>The sampling procedures for quality control are outlined under sampling techniques above.</p> <p>Twinning holes and second half core sampling is usually adopted during exploration projects. High density drilling is also employed in the main mining areas.</p> <p>Variability and nugget effects produces complications when sampling for coarse gold have been address by PGM. The sample size of drill core is adequate to capture gold at the micron size range. The ore bodies with the higher CV's are drilled at a closer spacing to minimise risk.</p>
<p>Quality of assay data and laboratory test</p>	<ul style="list-style-type: none"> • <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> • <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory</i> 	<p>Samples dry for 12 hours at 104°C in oven. Samples are crushed to <3mm and pulverised to 90% passing 75um in and LM5 pulveriser. 250 grams of sample is scooped from the bowl. Sizing tests are performed every 10 samples. Barren wash is used between samples. 50 grams is scooped from the 250 grams for fire assay. 4 acid digest is used to determine base metals. Fire assay and four acid digest are methods considered as total element analysis. Acid leach tests are performed on waste used for surface works where necessary.</p> <p>The suite of elements assayed and the lad methods used are considered adequate for resource reporting.</p> <p>No geophysical tools were used in the determination of assay results. All assay results were generated by an independent third-party laboratory as described above.</p> <p>A blank is submitted at the start of every hole. Standards are submitted at a frequency of 1 in 20. Standard fails are followed up with 10 sample repeats adjacent to the standard that failed. Replicates and duplicates are done by ALS at a frequency of 1 in 20. Standards, replicates and duplicates are graphed at regular intervals to determine accuracy and precision. The standards are supplied by Gannet Holdings Pty Ltd and Geostats. Standards have been both matrix matched and non-matrix matched. Between 300 and 500 pulps are selected from ore samples and sent for check assay at another lab annually.</p>

<p>Verification of sampling and assaying</p>	<ul style="list-style-type: none"> • <i>The verification of significant intersections by either independent or alternative company personnel.</i> • <i>The use of twinned holes.</i> • <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> 	<p>Extreme high grades (>100ppm Au) are repeated as a matter of course. The database is used by all geologist and engineers on the PGM site. A third party audit is performed annually and performs analysis on the data. During annual pulp checks certain intersections are repeated in full.</p> <p>The use of twinned holes is generally restricted to exploration – deeper holes that have resource estimated around them are replaced with grade control drill holes and left out of the data set as this occurs.</p> <p>Physical and electronic copies exist of drill designs, downhole surveys and assay data. Raw laboratory data is filed as it comes from the lab. The assay .CSV file from the lab is manipulated by an excel add-in routine to suit the load query in the geological database “Drillview”. The database has a verification sequence which checks end of holes and overlapping intervals. All data entry procedures are documented. Historic hard copies are stored in a fire proof room. Electronic data is backed up weekly, monthly and yearly and stored in a fire proof safe on site.</p>
<p>Location of data points</p>	<ul style="list-style-type: none"> • <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> • <i>Specification of the grid system used</i> • <i>Quality and adequacy of topographic control.</i> 	<p>Surface drill hole collars are initially located using hand held GPS to ±5m. Upon completion collars are located with differential GPS to ±5cm. Underground collars are picked up by the mine surveyor (collar position and dip/azimuth) using a Total Station Theodolite. Downhole surveys are taken using a reflex camera. Eastman single shot cameras were phased out in 2007. Readings with abnormal magnetics are flagged unreliable in the database. The reflex camera is used for multi shot where required and giro cameras are used in highly magnetic ground. Check surveys are done weekly in a test bed on surface. Reliability is checked in Excel. A resurvey is done if out of limits. Two fails and instrument is sent away and replaced. Collar surveys are as accurate as the mine survey which is subject to regulatory re-survey on an interval basis.</p> <p>PGM uses a metric mine grid that is -15° 31' 38.72201 degrees to MGA grid. There is an additional 10,000.4m added to the AHD. Magnetic drilling surveys are corrected by 25 degrees.</p> <p>The PGM grid was aligned with the state MGA grid in Feb 2009. Existing surface survey control consists of two baselines each with two high order stations registered with SCIMS on both the Peak and New Cobar leases. All exploration holes and topographic features are fixed using DTK GPS.</p>
<p>Data spacing and distribution</p>	<ul style="list-style-type: none"> • <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological</i> 	<p>Underground drill hole spacing for Reserves is between 10m and 30m spacing depending on the type and complexity of the mineralisation. Surface exploration results are replaced by delineation drilling as a mine progresses to depth. Drill spacing away from the main mineralised lodes is generally wider spaced and dependent on the stage of exploration.</p>

	<p><i>and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></p> <ul style="list-style-type: none"> • <i>Whether sample compositing has been applied.</i> 	<p>The resource is classified on the following drill hole centres and search distances depending on the type and complexity of the mineralisation: Measured – range 15mx15m to 25mx25m Indicated – range 30mx30m to 50mx50m Inferred – range 60mx60m to 75mx75m The confidence in classification is considered consistent with the 2012 JORC code.</p> <p>The majority of drill holes are sampled at one metre intervals and compositing is at 1m intervals.</p>
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<p>All ore bodies are near vertical. The drill hole orientation is designed to be across the width of the lode. This is adequate where the mineralised structures are sub-parallel to the regional foliation.</p> <p>Underground mapping has located some structures that are sub-parallel to the drilling direction. The drilling density off-sets any bias associated with such intercepts and additional drilling from other directions has been done. These structures are generally secondary to the main lode and of short strike length.</p>
Sample security	<ul style="list-style-type: none"> • <i>The measures taken to ensure sample security</i> 	<p>Core is stored in a lockable yard within the Peak site. The Peak site has 24 hour manned gates and requires swipe card access given only to Peak personnel. Samples are placed in tied calico bags with sample numbers that provide no information on the location of the sample.</p>
Audits or reviews	<ul style="list-style-type: none"> • <i>The results of any audits or reviews of sampling techniques and data</i> 	<p>H&SC audited PGMs core yard in 2008. No concerning issues arose in regards to the procedures of core mark up, photography, RQD measurement, cutting, core density, packaging and dispatch. Continuous improvements have been made by PGM with the implementation of roller racks, air conditioned sampling sheds, re-plumbing of water supply to the racks and the introduction of blue metal as a blank check. Previously PGM was using non mineralised core mainly from the beginnings of New Occidental delineation holes representing the barren Great Cobar Slate. Drill hole data is reviewed by H&SC during the resource audits and measures of drill hole deviation and assay ranges are scrutinised and verified.</p>

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section)

Criteria	JORC Code explanation	Commentary																																																			
<p>Mineral tenement and land tenure status</p>	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<p>In August 2012 a notice of application for determination of native title was made in central NSW which encompassed all of Peak Gold Mines mineral tenements. Legal advice indicated that Crown land may be claimable, so exploration has been delayed over this land tenure until it can be established if native title has been extinguished or if an access agreement with the claimants will be required. This effects areas within EL5933 (Wrightville Common & Kaloogleguy Regeneration Reserve) and EL7355 (Cumbine State Forest). The following table is a list of tenements held in full or part by PGM.</p> <table border="1"> <thead> <tr> <th>Tenement</th> <th>Name</th> <th>Ownership</th> </tr> </thead> <tbody> <tr> <td>CML6</td> <td>Fort Bourke Hill</td> <td>PGM 100%</td> </tr> <tr> <td>CML7</td> <td>Coronation</td> <td>PGM 100%</td> </tr> <tr> <td>CML8</td> <td>Peak/Occidental</td> <td>PGM 100%</td> </tr> <tr> <td>CML9</td> <td>Queen Bee</td> <td>PGM 100%</td> </tr> <tr> <td>ML1483</td> <td>Fort Bourke Hill</td> <td>PGM 100%</td> </tr> <tr> <td>MPL854</td> <td>Dam</td> <td>PGM 100%</td> </tr> <tr> <td>EL5933</td> <td>Peak</td> <td>PGM 100%</td> </tr> <tr> <td>EL6149</td> <td>Mafeesh</td> <td>PGM 100%</td> </tr> <tr> <td>EL6401</td> <td>Rookery East</td> <td>PGM 100%</td> </tr> <tr> <td>EL7355</td> <td>Nymagee East</td> <td>PGM 100%</td> </tr> <tr> <td>EL8060</td> <td>Nymagee North</td> <td>PGM 100%</td> </tr> <tr> <td>EL8523</td> <td>Margaret vale</td> <td>PGM 100%</td> </tr> <tr> <td>EL8548</td> <td>Narri</td> <td>PGM 100%</td> </tr> <tr> <td>EL8567</td> <td>Kurrajong</td> <td>PGM 100%</td> </tr> <tr> <td>EL5982</td> <td>Norma Vale</td> <td>PGM 75%, Zintoba 25%</td> </tr> <tr> <td>EL6127</td> <td>Rookery South</td> <td>PGM 83%, Lydail 17%</td> </tr> </tbody> </table> <p>PGM continues to fulfil all requirements of tenement ownership, including reporting obligations, timely renewals, expenditure commitments, environment permitting and rehabilitation. All tenements are held securely.</p>	Tenement	Name	Ownership	CML6	Fort Bourke Hill	PGM 100%	CML7	Coronation	PGM 100%	CML8	Peak/Occidental	PGM 100%	CML9	Queen Bee	PGM 100%	ML1483	Fort Bourke Hill	PGM 100%	MPL854	Dam	PGM 100%	EL5933	Peak	PGM 100%	EL6149	Mafeesh	PGM 100%	EL6401	Rookery East	PGM 100%	EL7355	Nymagee East	PGM 100%	EL8060	Nymagee North	PGM 100%	EL8523	Margaret vale	PGM 100%	EL8548	Narri	PGM 100%	EL8567	Kurrajong	PGM 100%	EL5982	Norma Vale	PGM 75%, Zintoba 25%	EL6127	Rookery South	PGM 83%, Lydail 17%
Tenement	Name	Ownership																																																			
CML6	Fort Bourke Hill	PGM 100%																																																			
CML7	Coronation	PGM 100%																																																			
CML8	Peak/Occidental	PGM 100%																																																			
CML9	Queen Bee	PGM 100%																																																			
ML1483	Fort Bourke Hill	PGM 100%																																																			
MPL854	Dam	PGM 100%																																																			
EL5933	Peak	PGM 100%																																																			
EL6149	Mafeesh	PGM 100%																																																			
EL6401	Rookery East	PGM 100%																																																			
EL7355	Nymagee East	PGM 100%																																																			
EL8060	Nymagee North	PGM 100%																																																			
EL8523	Margaret vale	PGM 100%																																																			
EL8548	Narri	PGM 100%																																																			
EL8567	Kurrajong	PGM 100%																																																			
EL5982	Norma Vale	PGM 75%, Zintoba 25%																																																			
EL6127	Rookery South	PGM 83%, Lydail 17%																																																			
<p>Exploration done by other parties</p>	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<p>Exploration has been ongoing since early 1900. No holes pre 1960 remain selected for the current resource estimate. Such holes were drilled by the New Occidental Mining Company and others.</p> <p>Extensive exploration has occurred under CRA, Wheaton River, Goldcorp, Newgold and Aurelia.</p>																																																			

<p>Geology</p>	<p><i>Deposit type, geological setting and style of mineralisation.</i></p>	<p>The deposits fall under the group of epigenetic “Cobar-Style” mineralisation and are controlled structurally by major fault zones (Rookery Fault System) and subsequent spurs and splays. The faults are within of the Devonian-Nurri Group of sedimentary units displaying lower green schist facies alteration. The economic minerals are contained within quartz stockworks and breccias. The breccia matrix are combinations of quartz, sediment, rhyolite and sulphide. The deposits are often polymetallic with gold, copper, silver, lead and zinc occurring in parallel lenses to the fault zones within the PGM</p>
<p>Drill hole Information</p>	<ul style="list-style-type: none"> • <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> ○ <i>easting and northing of the drill hole collar</i> ○ <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> ○ <i>dip and azimuth of the hole</i> ○ <i>down hole length and interception depth</i> ○ <i>hole length.</i> • <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the</i> 	<p>All relevant data drill hole data is included in the main body of the report.</p>
<p>Data aggregation methods</p>	<ul style="list-style-type: none"> • <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i> • <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> • <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<p>Exploration results reported on a length-weighted basis. No top-cut or grade truncations have been applied to any assay results. Composite intervals are reported using a nominal \$50 NSR cut-off for Kairos results.</p> <p>Higher results that occur internal to the composited intervals as described above are included in this report. Higher grade intervals are only highlighted if there are areas within the composite that differ significantly from the overall grades. Reporting of the shorted intercepts allows a more complete understanding of the grade distribution within the mineralised zone.</p> <p>No metal equivalences are quoted in this report.</p>

<p>Relationship between mineralisation widths and intercept lengths</p>	<ul style="list-style-type: none"> • <i>These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole is known, its nature should be reported.</i> • <i>If unknown and down hole lengths are reported, there should be a statement to the effect (e.g. 'down hole length, true width not known').</i> 	<p>The extensive exploration and mining history in the Peak Mines means the geometry of the ore zones is very well understood. As such, estimated true widths are included this report.</p>
<p>Diagrams</p>	<ul style="list-style-type: none"> • <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<p>See body of report.</p>
<p>Balanced reporting</p>	<ul style="list-style-type: none"> • <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<p>All available new drill results from the recent program are given in this report.</p>
<p>Other substantive exploration data</p>	<ul style="list-style-type: none"> • <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<p>See body of report.</p>
<p>Further work</p>	<ul style="list-style-type: none"> • <i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<p>See body of report.</p>

Federation and Main SE

JORC Code 2012 (Table 1) - Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. AusIMM.

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <i>Nature and quality of sampling (e.g. cut channels, random chips or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i> 	<ul style="list-style-type: none"> RC chip samples were collected using a rotary cone splitter directly off the drill rig. All samples were collected on a dry basis. Diamond core sampling is by sawn half HQ or NQ core. Nominal sample intervals are 1m with a range from 0.5m to 1.5m. Samples are transported to ALS Geochemistry - Orange for preparation and assay.
	<ul style="list-style-type: none"> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> 	<ul style="list-style-type: none"> Assay standards or blanks are inserted at least every 25 samples. Duplicates were extensively used (at least 1 in 20 samples) in the current RC programs to ensure representivity.
	<ul style="list-style-type: none"> <i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> RC drilling was used to obtain representative samples of 1 metre length. Diamond drilling was used to obtain core samples of nominally 1m, but with a range between 0.5 - 1.5m. RC chip samples are dried, crushed and pulverised to 85% passing 75 microns. Core samples are cut in half, dried, crushed and pulverised to 85% passing 75 microns. This is considered to appropriately homogenise the sample. Gold is by 30g fire assay with AAS finish, (method Au – AA25) with a detection level of 0.01ppm. For base metals a 0.5g charge is dissolved using aqua regia digestion (Method ICP41-AES) with detection levels of: Ag-0.2ppm, As-2ppm, Cu-1ppm, Fe-0.01%, Pb-2ppm, S-0.01%, Zn-2ppm. Overlimit analysis is by OG46 - aqua regia digestion with ICP-AES finish.

<p>Drilling techniques</p>	<ul style="list-style-type: none"> • <i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).</i> 	<ul style="list-style-type: none"> • Drilling by diamond coring generally commences as PQ core until fresh rock is reached. The PQ rods are left as casing then HQ coring is employed. Reverse circulation percussion (RC) method used in this program utilised a face sampling 143 millimetre bit. Wedging from a parent with NQ-sized core was used at Main SE. Pre-collars with RC down to between 200 and 350 metres below surface was employed at Federation, followed by HQ diamond coring.
<p>Drill sample recovery</p>	<ul style="list-style-type: none"> • <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> • <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> • <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<ul style="list-style-type: none"> • Chip recoveries are generally monitored visually at the rig by the size of the individual bags. Any low recoveries will be noted by the geologist at the rig. Measured diamond core recovery against intervals drilled is recorded as part of geotechnical logging. Recoveries are greater than 95% once in fresh rock. • Diamond drill holes use triple tube drilling to maximise recovery. No specific measures are in place to maximise recovery of drilled chips. Poor recoveries will be discussed with the driller as they may be the result of a blockage or otherwise poor ground. • The relationship between sample recovery and grade has not been assessed.
<p>Logging</p>	<ul style="list-style-type: none"> • <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i> 	<p>Systematic geological and geotechnical logging is undertaken. Data collected includes:</p> <ul style="list-style-type: none"> • Nature and extent of lithologies (RC and core) • Relationship between lithologies (RC and core) • Amount and mode of occurrence of ore minerals (RC and core) • Location, extent and nature of structures such as bedding, cleavage, veins, faults etc. (core only) • Structural data (alpha & beta) are recorded for orientated core (core only) • Geotechnical data such as recovery, RQD, fracture frequency, qualitative IRS, microfractures, veinlets and number of defect sets. For some geotechnical holes the orientation, nature of defects and defect fill are recorded (core only) • Bulk density by Archimedes principle at regular intervals (core only) • Both qualitative and quantitative data is collected. All core is digitally photographed • 100% of all recovered core and chips are geologically and geotechnically logged.
<p>Sub-sampling techniques and sample preparation</p>	<ul style="list-style-type: none"> • <i>If core, whether cut or sawn and whether Quarter, half or all core taken.</i> • <i>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or</i> 	<ul style="list-style-type: none"> • Core is sawn with half core submitted for assay. Sampling is consistently on one side of the orientation line so that the same part of the core is sent for assay. PQ core is ¼ sampled. • All RC samples were split using a rotary cone sampler directly off the drilling rig. Two samples were collected for every metre to allow for duplicate samples to be taken at any interval. All sampling was on a dry basis.

	<p><i>dry.</i></p> <ul style="list-style-type: none"> • <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> • <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> • <i>Measures taken to ensure that the sampling is representative of the insitu material collected, including for instance results for field duplicate/second-half sampling.</i> • <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> • Samples are dried crushed and pulverised to 85% passing 75 microns. This is considered to appropriately homogenise the sample to allow subsampling for the various assay techniques. • Certified Standard Reference Materials and blanks are inserted at least every 25 samples to assess the accuracy and reproducibility. The results of the standards are to be within $\pm 10\%$ variance, or 2 standard deviations, from known certified result. If greater than 10% variance the standard and up to 10 samples each side are re-assayed. ALS conduct internal check samples every 20 samples for Au and every 20 for base metals. Assay grades are occasionally compared with mineralogy logging estimates. If differences are detected a re-assay can be carried out using the bulk reject or the assay pulp. • Systematic duplicate sampling was employed during the Federation RC program. A regular duplicate was taken at predetermine sample intervals (averaging 1:25 samples). Further, a samples occurring in mineralised zones were duplicated, increasing the duplicate rate to one sample every 15-20 samples. Second-half sampling of the diamond core was not employed in this program. • Sample sizes are considered appropriate.
<p>Quality of assay data and laboratory test</p>	<ul style="list-style-type: none"> • <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> • <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i> 	<ul style="list-style-type: none"> • Standard assay procedures performed by a reputable assay lab (ALS Group) were undertaken. Gold assays are by 30g fire assay with AAS finish, (method Au-AA25). Ag, As, Cu, Fe, Pb, S, Zn are digested in aqua regia then analysed by ICP-AES (method ME-ICP41). Comparison with 4 acid digestion indicate that the technique is considered total for Ag, As, Cu, Pb, S, Zn. Fe may not be totally digested by aqua regia but near total digestion occurs. • No geophysical tools were used in the determination of assay results. All assay results were generated by an independent third-party laboratory as described above. • Certified reference material or blanks are inserted at least every 25 samples. Standards are purchased from Certified Reference Material manufacture companies: Ore Research and Exploration, Gannet Holdings Pty Ltd and Geostats Pty Ltd. Standards were purchased in foil lined packets of between 60g and 100g. Different reference materials are used to cover high grade, medium grade and low grade ranges of elements: Au, Ag, Pb, Zn Cu, Fe, S and As. The standard names on the foil packages were erased before going into the pre-numbered sample bag and the standards are submitted to the lab blind.

<p>Verification of sampling and assaying</p>	<ul style="list-style-type: none"> • <i>The verification of significant intersections by either independent or alternative company personnel.</i> • <i>The use of twinned holes.</i> • <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> 	<ul style="list-style-type: none"> • The raw assay data forming significant intercepts are examined by at least two company personnel. • No twinned holes have been used at this stage. • Drill hole data including meta data, any gear left in the drill hole, lithological, mineral, survey, sampling and occasionally magnetic susceptibility is collected and entered directly into an excel spread sheet using drop down codes. When complete the spreadsheet is emailed to a geological database administrator, the data is validated and uploaded into a SQL database. • Assay data is provided by ALS via .csv spreadsheets. The data is validated using the results received from the known certified reference material. Using an SQL based query the assay data is merged into the database. Hard copies of the assay certificates are stored with drill hole data such as drillers' plods, invoices and hole planning documents.
<p>Location of data points</p>	<ul style="list-style-type: none"> • <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> • <i>Specification of the grid system used</i> • <i>Quality and adequacy of topographic control.</i> 	<ul style="list-style-type: none"> • Drill hole collars are initially located using hand held GPS to $\pm 5\text{m}$. Upon completion collars are located with differential GPS to $\pm 5\text{cm}$ or picked up by the mine surveyors using a Total Station Theodolite (TST). • Drill holes are downhole-surveyed from collar to the end of hole by drilling personnel using downhole survey tool (Reflex). Drill holes are surveyed by single shot camera during drilling at intervals ranging between 15-30m. All survey data for every hole is checked and validated by Aurelia Metals personnel before being entered into the database. • All coordinates are based on Map Grid Australia zone 55H • Topographic control is considered adequate. There is no substantial variation in topography in the area with a maximum relief of 70m present. Local control within the Hera and Nymagee Mine areas is based on accurate mine surveys.
<p>Data spacing and distribution</p>	<ul style="list-style-type: none"> • <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> • As each of the prospects discussed represent relatively new discoveries, data spacing is extremely variable. Drill hole spacing at Federation ranges from 30 to 200 metres. A total of eight diamond holes have been completed at Main SE with spacing of 30-100 metres. • Not applicable as no Ore Resource or Reserve has been completed at Federation or Main SE. • Sample compositing is not applied.

Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> • Drilling is orientated to cross the interpreted, steeply dipping mineralisation trends at moderate to high angles. Holes are drilled from both the footwall and hangingwall of the mineralisation where possible. The use of orientated core allows estimates of the true width and orientation of the mineralisation to be made. • No known bias has been introduced due to drilling orientation.
Sample security	<ul style="list-style-type: none"> • The measures taken to ensure sample security 	<ul style="list-style-type: none"> • Chain of custody is managed by Aurelia Metals. Samples are placed in tied calico bags with sample numbers that provide no information on the location of the sample. Samples are transported from site to the assay lab by courier or directly delivered by Aurelia Metals personnel.
Audits or reviews	<ul style="list-style-type: none"> • The results of any audits or reviews of sampling techniques and data 	<ul style="list-style-type: none"> • No audit or review of the sampling regime at Federation/Dominion has been directly completed. However, an audit and review of the sampling regime at Hera, which uses identical sampling procedures, was undertaken by H&S Consultants in November 2015. Recommendations from this review form part of the current sampling practices at Hera and regionally.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> • Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. • The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> • The Dominion prospect is located on Exploration Lease 6162, owned 100% by Hera Resources Pty. Ltd. (a wholly owned subsidiary of Aurelia Metals Limited). The Main SE prospect is located on ML1686, owned 100% by Hera Resources Pty. Ltd. (a wholly owned subsidiary of Aurelia Metals Limited). • At the time of reporting there were no known impediments to operating in these areas.
Exploration done by other parties	<ul style="list-style-type: none"> • Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> • The area has a 50 year exploration history in the Nymagee area involving reputable companies such as Cyprus Mines, Buka, ESSO Minerals, CRAE, Pasmenco, Triako Resources and CBH Resources. Previous exploration data has been ground-truthed where possible. Historic drill hole collars have been relocated and surveyed.

<p>Geology</p>	<p><i>Deposit type, geological setting and style of mineralisation.</i></p>	<ul style="list-style-type: none"> • All known mineralisation in the area is epigenetic “Cobar-style”. Deposits are generally structurally controlled quartz + sulphide matrix breccias grading to massive sulphide. In a similar fashion to the other Cobar deposits, the Federation prospect occurs to the west of the Rookery Fault, a major regional structure with over 300km strike length. The deposits are near the boundary of the Devonian Lower Amphitheatre Group and the underlying Roset Sandstone. Both units show moderate to strong ductile deformation with tight upright folding coincident with greenschist facies regional metamorphism. A well-developed sub vertical cleavage is present. • Mineralisation identified at Federation includes sphalerite-galena±chalcopyrite-pyrrhotite-pyrite in veins and breccias. • Mineralisation identified at Main SE includes spalerite-galena-pyrite-pyrrhotite±chalcopyrite in veins and breccias
<p>Drill hole Information</p>	<ul style="list-style-type: none"> • <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> ○ <i>easting and northing of the drill hole collar</i> ○ <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> ○ <i>dip and azimuth of the hole</i> ○ <i>down hole length and interception depth</i> ○ <i>hole length.</i> • <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	<ul style="list-style-type: none"> • All relevant drill hole data is included in the main body of the report.

<p>Data aggregation methods</p>	<ul style="list-style-type: none"> • <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i> • <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> • <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<ul style="list-style-type: none"> • Exploration results have been reported on a length-weighted basis. No top-cut or grade truncations have been applied to any assay results. Composite intervals are reported using a nominal 1% Pb+Zn or 1g/t Au cut-off. Internal dilution of up to 2 metres has been allowed. The oxide Au mineralisation in FRC027 is reported at a nominal 0.1g/t Au cut-off. • Higher grade results that occur internal to the composited intervals as described above are included in this report. Higher grade intervals are only highlighted if there are areas within the composite that differ significantly from the overall grades. Reporting of the shorter intercepts allows a more complete understanding of the grade distribution within the mineralised zone. • No metal equivalences are quoted in this report.
<p>Relationship between mineralisation widths and intercept lengths</p>	<ul style="list-style-type: none"> • <i>These relationships are particularly important in the reporting of Exploration Results.</i> • <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> • <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> • The uncertain nature of the mineralisation orientation/controls for each prospect is discussed in the text of this report. • Due to the limited data available to date, only downhole lengths are reported as true widths are not currently known. As far as possible, context as to the size and orientation of the mineralisation has been given in the diagrams provided.
<p>Diagrams</p>	<ul style="list-style-type: none"> • <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> • See body of report.
<p>Balanced reporting</p>	<ul style="list-style-type: none"> • <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> • All new drill results from the recent programs are given in this report, and include mineralised and un-mineralised holes.

<p>Other substantive exploration data</p>	<ul style="list-style-type: none"> • <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> • See body of report.
<p>Further work</p>	<ul style="list-style-type: none"> • <i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> • Future work is discussed in the body of the text.