

FEDERATION RETURNS BEST BASE METAL INTERCEPTS TO DATE

HIGHLIGHTS

- Multiple exceptionally high-grade base metal intercepts returned from ongoing Resource and extensional drilling at Federation, including:
 - 70.0m at 18.4% Pb+Zn, 0.2g/t Au & 0.5% Cu, incl. 17.8m at 45.6% Pb+Zn, 0.3g/t Au & 1.1% Cu
 - 19.9m at 31.2% Pb+Zn & 0.2g/t Au, incl. 10.4m at 51.1% Pb+Zn & 0.4g/t Au
 - 35.0m at 17.1% Pb+Zn, 0.1g/t Au & 0.4% Cu, incl. 11.0m at 42.6% Pb+Zn, 0.2g/t Au & 0.4% Cu
 - 25.8m at 20.6% Pb+Zn, 0.4g/t Au & 1.0% Cu, incl. 10.0m at 42.0% Pb+Zn, 0.4g/t Au & 1.7% Cu
 - 13.8m at 34.0% Pb+Zn, 0.3g/t Au & 0.3% Cu, incl. 4.9m at 57.1% Pb+Zn, 0.5g/t Au & 0.5% Cu
 - 19.0m at 23.8% Pb+Zn, 0.2g/t Au & 0.7% Cu, incl. 5.0m at 51.4% Pb+Zn, 0.4g/t Au & 0.8% Cu
 - 18.9m at 23.4% Pb+Zn, 0.2g/t Au & 0.5% Cu, incl. 7.0m at 41.4% Pb+Zn, 0.3g/t Au & 0.8% Cu
 - 36.0m at 9.4% Pb+Zn, 0.2g/t Au & 0.1% Cu, incl. 9.0m at 23.2% Pb+Zn, 0.2g/t Au & 0.1% Cu
 - 4.6m at 51.9% Pb+Zn & 0.1g/t Au
- New intercepts extend high grade mineralisation significantly beyond the current Resource envelope to the southwest and at depth
- Accelerated Resource conversion drilling commenced at Federation; upgraded Resource classification to support project optimisation as a part of the current Feasibility Study (expected completion mid-2022)
- Environmental impact assessment process for Federation commenced with technical studies and government and community consultation underway

Aurelia Metals Limited (ASX: AMI) (**Aurelia** or the **Company**) is pleased to provide an update to ongoing Resource and extensional drilling at the Federation deposit, located ten kilometres south of the Company's operating Hera Mine.

The Federation deposit currently has Indicated and Inferred Resources totalling **3.5Mt at 5.5% Pb, 9.8% Zn, 1.4g/t Au, 7g/t Ag & 0.3% Cu** (see ASX release 23 February 2021). In April, the Company reported the successful completion of a Scoping Study for the potential development of the Federation deposit and announced the project would proceed directly to a Feasibility Study (see ASX release 8 April 2021).

Since the February 2021 Mineral Resource Estimate (MRE) was released, Aurelia has continued intensive diamond drilling at Federation, with the focus moving to the central and southwestern portions of the deposit (**Figure 1**). Significant new intercepts from this drilling include:

FDD126W3	7.0 metres at 29.5% Pb+Zn, 0.1g/t Au, 14g/t Ag & 0.4% Cu from 557.0m 70.0 metres at 18.4% Pb+Zn, 0.2g/t Au, 10g/t Ag & 0.5% Cu from 583.0m, includes 17.8 metres at 45.6% Pb+Zn, 0.3g/t Au, 24g/t Ag & 1.1% Cu from 589.0m
FDD113W4	19.9 metres at 31.2% Pb+Zn, 0.2g/t Au & 8g/t Ag from 474.0m, includes 10.4 metres at 51.1% Pb+Zn, 0.4g/t Au & 13g/t Ag from 481.6m

FDD126W5	35.0 metres at 17.1% Pb+Zn, 0.1g/t Au, 10g/t Ag & 0.4% Cu from 576.0m, <i>includes 11.0 metres at 42.6% Pb+Zn, 0.2g/t Au, 16g/t Ag & 0.4% Cu from 599.0m</i>
FDD126W4	25.8 metres at 20.6% Pb+Zn, 0.4g/t Au, 15g/t Ag & 1.0% Cu from 567.2m, <i>includes 10.0 metres at 42.0% Pb+Zn, 0.4g/t Au, 25g/t Ag & 1.7% Cu from 568.0m</i>
FDD135	13.8 metres at 34.0% Pb+Zn, 0.3g/t Au, 15g/t Ag & 0.3% Cu from 368.0m, <i>includes 4.9 metres at 57.1% Pb+Zn, 0.5g/t Au, 27g/t Ag & 0.5% Cu from 369.2m</i>
FDD113W1	19.0 metres at 23.8% Pb+Zn, 0.2g/t Au, 13g/t Ag & 0.7% Cu from 504.0m, <i>includes 5.0 metres at 51.4% Pb+Zn, 0.2g/t Au, 27g/t Ag & 0.8% Cu from 511.0m</i>
FDD115	7.0 metres at 14.9% Pb+Zn, 0.1g/t Au & 9g/t Ag from 362.0m 18.9 metres at 23.4% Pb+Zn, 0.2g/t Au, 10g/t Ag & 0.5% Cu from 389.1m, <i>includes 4.9 metres at 57.1% Pb+Zn, 0.5g/t Au, 27g/t Ag & 0.5% Cu from 391.0m</i>
FDD113W5	36.0 metres at 9.4% Pb+Zn, 0.2g/t Au, 5g/t Ag & 0.1% Cu from 485.0m, <i>includes 9.0 metres at 23.2% Pb+Zn, 0.2g/t Au, 11g/t Ag & 0.1% Cu from 509.0m</i> 8.0 metres at 23.7% Pb+Zn, 0.2g/t Au, 10g/t Ag & 0.4% Cu from 541.0m
FDD126W2	4.6 metres at 51.9% Pb+Zn, 0.1g/t Au & 16g/t Ag from 542.2m 7.2 metres at 19.2% Pb+Zn, 0.2g/t Au, 8g/t Ag & 0.4% Cu from 611.6m 8.0 metres at 11.7% Pb+Zn & 5g/t Ag from 624.0m

Full drill hole details are provided in **Table 1** and a list of significant new results received for the Federation deposit are shown in **Table 2**.

The width and high grade tenor of a number of these intercepts make them amongst the best base metal results returned since the discovery of Federation in 2019. High grade mineralisation remains open in multiple directions, with the new drilling also confirming the presence of at least three steeply plunging high grade zones (**Figure 1**).

Results from the ongoing drilling programs will support mining and processing optimisation studies associated with the Federation Feasibility Study, due for completion in mid-2022. Aurelia has also commenced technical studies and government and community consultation activities as a part of the environmental impact assessment process required for full development approval.

The Company is now undertaking an accelerated drilling program to upgrade Resource confidence from Inferred to Indicated status, with up to four diamond drill rigs operating at the site. This program is expected to underpin the maiden Ore Reserve Estimate for Federation to correspond with the completion of the Feasibility Study in mid-2022.

This announcement has been approved for release by the Board of Directors of Aurelia Metals.

For further information contact:

Dan Clifford
Managing Director and CEO
Aurelia Metals
+61 7 3180 5000

Media contact
Michael Vaughan
Fivemark Partners
+61 422 602 720

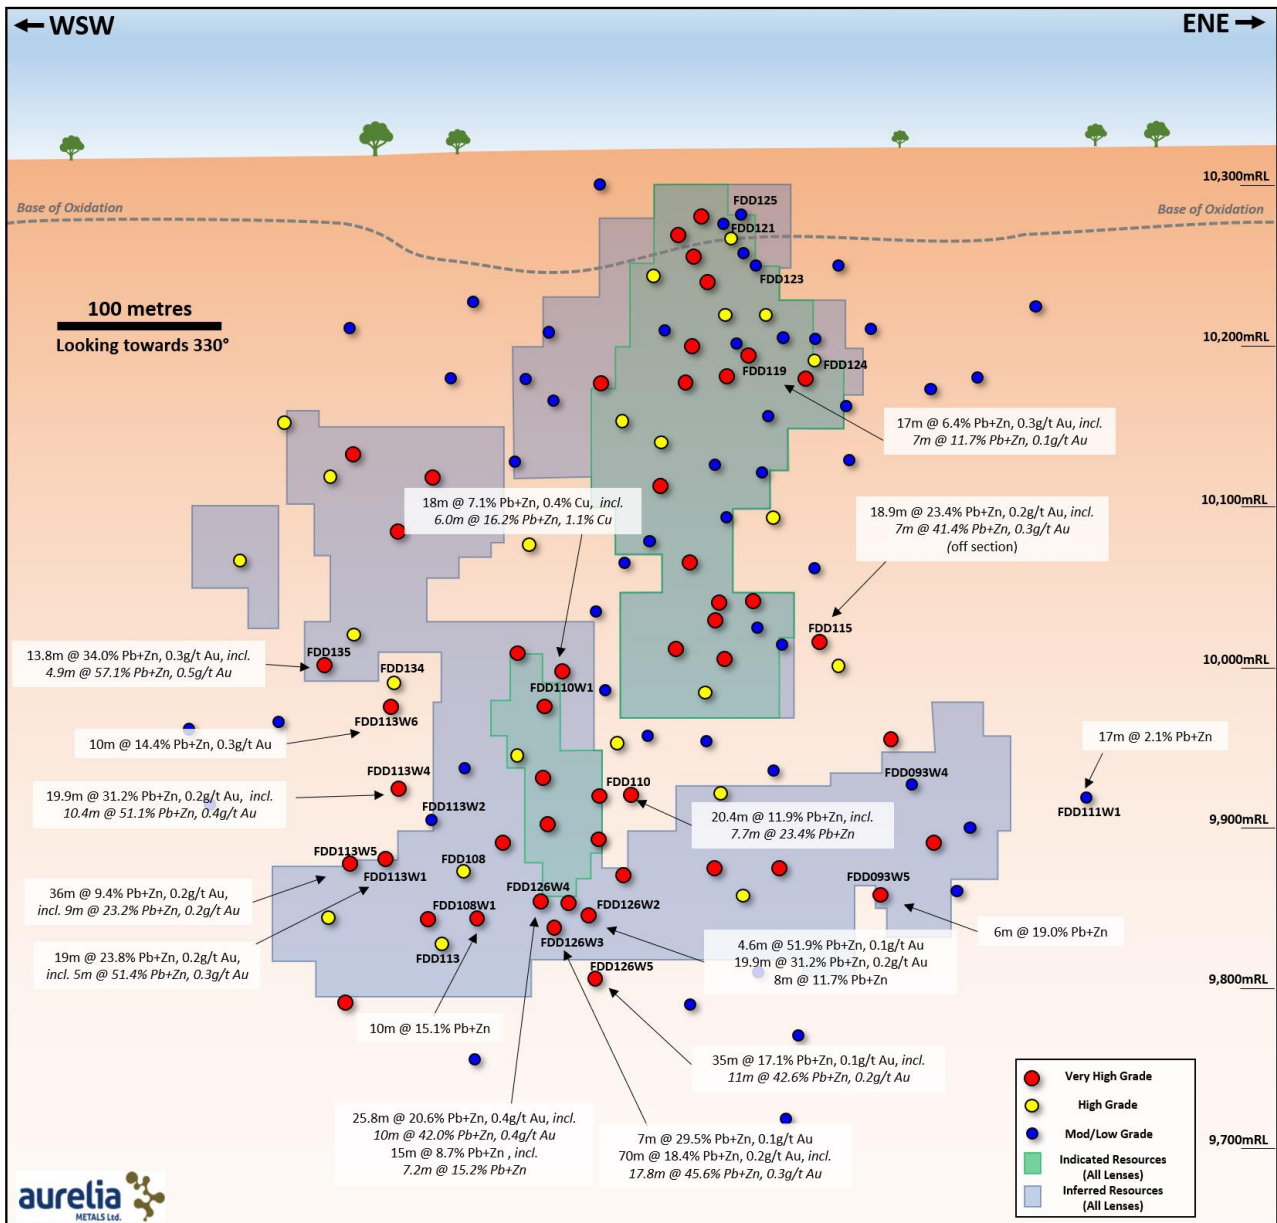


Figure 1. Schematic long section showing the Federation deposit with an outline of the Indicated and Inferred Resource areas and selected new intercepts. A full list of significant new intercepts is shown in **Table 2**.

Previous Results

The information in this announcement that relates to the Federation project is extracted from the Company's announcements entitled 'Updated Federation Mineral Resources Estimate', 'Federation drilling continues to deliver base metals and gold upside' and 'Federation project proceeds to feasibility study' released on 23 February 2021, 29 March 2021 and 8 April 2021 and are available to view on www.aureliametals.com and www.asx.com.au. The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and, in the case of estimates of Mineral Resources or Ore Reserves, that all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

Competent Persons Statement

The information in this report that relates to Exploration Results is based on information compiled by Adam McKinnon, BSc (Hons), PhD, who is a Member of the Australasian Institute of Mining and Metallurgy. Dr McKinnon is a full-time employee of Aurelia Metals and has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves.' Dr McKinnon consents to the inclusion in this report of the matters based on his information in the form and context in which it appears.

Table 1. Collar summary for the drill holes reported in this release.

Type	Hole ID	Easting (MGA)	Northing (MGA)	Local RL (m)	DIP	Azimuth (MGA)	Total Depth (m)
DDH	FDD093W4	434321.9	6437321.8	10320.1	-63.8	139.7	639.6
DDH	FDD093W5	434321.9	6437321.8	10320.1	-63.8	139.7	649.2
DDH	FDD108	433982.8	6437197.6	10317.3	-60.4	127.9	690.3
DDH	FDD108W1	433982.8	6437197.6	10317.3	-60.4	127.9	645.1
DDH	FDD110	434091.1	6437194.8	10319.5	-60.7	139.9	609.6
DDH	FDD110W1	434091.1	6437194.8	10319.5	-60.7	139.9	603.5
DDH	FDD111W1	434403.8	6437404.7	10320.2	-64.5	140.6	720.6
DDH	FDD113	433988.0	6437200.9	10317.6	-64.3	122.6	687.3
DDH	FDD113W1	433988.0	6437200.9	10317.6	-64.3	122.6	676.8
DDH	FDD113W2	433988.0	6437200.9	10317.6	-64.3	122.6	660.7
DDH	FDD113W4	433988.0	6437200.9	10317.6	-64.3	122.6	675.2
DDH	FDD113W5	433988.0	6437200.9	10317.6	-64.3	122.6	666.0
DDH	FDD113W6	433988.0	6437200.9	10317.6	-64.3	122.6	651.0
DDH	FDD115	434206.9	6437086.1	10323.3	-55.5	113.5	537.5
DDH	FDD119	434266.6	6437026.2	10323.6	-60.7	101.3	255.6
DDH	FDD121	434328.0	6437043.9	10324.1	-55.1	182.4	192.6
DDH	FDD123	434310.8	6437059.3	10324.0	-55.5	144.1	168.1
DDH	FDD124	434300.6	6437071.4	10323.9	-58.6	112.9	450.6
DDH	FDD125	434290.5	6437079.5	10323.9	-59.6	121.0	327.4
DDH	FDD126W2	433937.5	6437284.8	10316.4	-60.0	114.2	767.9
DDH	FDD126W3	433937.5	6437284.8	10316.4	-60.0	114.2	801.6
DDH	FDD126W4	433937.5	6437284.8	10316.4	-60.0	114.2	708.6
DDH	FDD126W5	433937.5	6437284.8	10316.4	-60.0	114.2	781.0
DDH	FDD134	434025.9	6437122.2	10319.1	-59.9	137.4	549.8
DDH	FDD135	434026.0	6437122.0	10318.0	-59.9	148.3	576.6

Table 2. Significant new intersections for the drill holes reported in this release.

Hole ID	Interval (m)	ETW* (m)	Pb (%)	Zn (%)	Pb+Zn (%)	Au (g/t)	Ag (g/t)	Cu (%)	From (m)
FDD093W4	3.0	2.1	4.0	8.0	11.9	0.1	5	0.5	503.0
	3.0	2.1	2.9	3.9	6.8	0.0	4	0.1	549.0
FDD093W5	6.0	3.5	6.9	12.2	19.0	0.1	7	0.3	511.0
FDD108 <i>includes</i>	10.0	6.9	4.4	3.7	8.1	0.0	6	0.5	528.0
	3.0	2.1	9.6	6.9	16.5	0.1	12	0.4	534.0
	1.0	0.7	9.7	11.1	20.8	0.1	17	1.0	565.0
FDD108W1	2.0	1.2	4.9	1.0	5.9	0.0	7	0.0	449.0
	10.0	5.9	6.8	8.4	15.1	0.1	9	0.9	534.0
	6.0	3.5	2.2	3.9	6.1	0.0	4	0.0	586.0
FDD110 <i>includes</i>	3.0	1.6	2.3	4.5	6.8	0.0	4	0.0	400.0
	20.4	11.0	4.6	7.3	11.9	0.2	6	0.2	412.3
	7.7	4.2	8.6	14.8	23.4	0.4	11	0.6	416.1
	3.0	1.6	1.8	3.6	5.3	0.0	3	0.0	453.0
FDD110W1 <i>includes</i>	16.0	12.3	3.0	1.4	4.4	0.3	7	0.8	401.0
	5.0	3.8	5.2	0.5	5.7	1.0	13	2.5	408.0
	18.0	13.8	2.7	4.4	7.1	0.1	5	0.4	542.0
	6.0	4.6	6.2	10.0	16.2	0.1	11	1.1	542.0
FDD111W1	17.0	13.4	0.8	1.3	2.1	0.0	5	0.0	583.0
FDD113	5.0	3.8	3.1	4.9	8.0	0.0	4	0.6	387.0
	1.4	1.1	10.5	8.3	18.8	0.1	18	0.0	605.0
FDD113W1 <i>includes</i>	3.0	2.2	1.3	3.0	4.3	0.0	3	0.4	354.0
	19.0	13.9	8.4	15.5	23.8	0.2	13	0.7	504.0
	5.0	3.7	20.0	31.4	51.4	0.2	27	0.8	511.0
	3.0	2.2	1.8	2.3	4.1	0.0	2	0.0	556.0
FDD113W2	8.0	6.5	0.6	1.1	1.6	0.0	1	0.0	488.0
FDD113W4 <i>includes</i>	19.9	16.2	9.2	22.0	31.2	0.2	8	0.0	474.0
	10.4	8.5	15.2	36.0	51.1	0.4	13	0.0	481.6
FDD113W5 <i>includes</i>	36.0	29.2	3.5	5.9	9.4	0.2	5	0.1	485.0
	9.0	7.3	8.4	14.7	23.2	0.2	11	0.1	509.0
	8.0	6.5	8.2	15.5	23.7	0.2	10	0.4	541.0
FDD113W6	10.0	8.5	5.5	8.9	14.4	0.3	6	0.2	439.0
	4.0	3.4	2.0	2.3	4.3	0.1	4	0.7	463.0
FDD115 <i>includes</i>	7.0	3.1	7.5	7.5	14.9	0.1	9	0.0	362.0
	18.9	8.3	7.7	15.7	23.4	0.2	10	0.5	389.1
	7.0	3.1	13.2	28.2	41.4	0.3	18	0.8	391.0
FDD119 <i>includes</i>	6.0	1.9	1.0	1.4	2.4	0.0	1	0.0	140.0
	3.0	0.9	5.7	0.3	6.0	0.1	12	1.5	163.0
	17.0	5.3	2.3	4.1	6.4	0.3	3	0.1	172.0
	7.0	2.2	4.6	7.1	11.7	0.1	6	0.2	174.0
FDD121	16.0	9.4	0.5	0.1	0.5	0.8	0	0.0	50.0
	2.0	1.2	0.8	0.1	0.8	1.4	0	0.0	61.0
FDD123	1.0	0.6	0.1	0.1	0.2	2.5	1	0.0	20.0
	3.0	1.7	0.0	0.1	0.1	1.0	0	0.0	54.0
	2.0	1.1	0.9	0.2	1.1	0.8	3	0.0	95.0
FDD124 <i>includes</i>	9.0	3.6	1.8	3.7	5.5	0.0	3	0.0	149.0
	3.0	1.2	4.5	9.3	13.8	0.0	7	0.0	155.0
	2.0	0.8	0.6	1.2	1.8	2.1	2	0.0	253.0
FDD125	2.0	0.9	0.0	0.1	0.1	1.1	0	0.0	73.0

*ETW = estimated true width, based on assumed sub-vertical lode orientation striking at 070°

Table 2 (continued). Significant new intersections for the drill holes reported in this release.

Hole ID	Interval (m)	ETW* (m)	Pb (%)	Zn (%)	Pb+Zn (%)	Au (g/t)	Ag (g/t)	Cu (%)	From (m)
FDD126W2	4.6	3.8	10.2	41.6	51.9	0.1	16	0.0	542.2
	2.0	1.7	0.0	0.0	0.0	2.4	0	0.0	581.0
	7.2	6.0	6.9	12.3	19.2	0.2	8	0.4	611.6
	8.0	6.7	4.5	7.2	11.7	0.0	5	0.0	624.0
	8.0	6.7	2.1	3.8	5.9	0.0	2	0.0	663.0
FDD126W3 <i>includes</i>	7.0	6.2	13.1	16.4	29.5	0.1	14	0.4	557.0
	70.0	61.8	7.1	11.3	18.4	0.2	10	0.5	583.0
	17.8	15.7	16.9	28.7	45.6	0.3	24	1.1	589.0
	5.8	5.1	17.4	24.8	42.2	0.3	16	0.8	629.3
FDD126W4 <i>includes</i>	25.8	22.8	8.1	12.4	20.6	0.4	15	1.0	567.2
	10.0	8.8	16.6	25.4	42.0	0.4	25	1.7	568.0
	10.0	8.8	1.5	2.3	3.8	0.0	3	0.0	606.0
	15.0	13.2	3.5	5.3	8.7	0.0	4	0.1	645.0
	7.2	6.4	6.2	9.0	15.2	0.0	7	0.2	645.8
FDD126W5 <i>includes</i>	35.0	27.8	6.4	10.6	17.1	0.1	10	0.4	576.0
	11.0	8.7	15.2	27.4	42.6	0.2	16	0.4	599.0
	5.0	4.0	4.5	5.8	10.4	0.1	8	0.1	651.0
	5.0	4.0	2.1	1.5	3.7	0.0	7	0.0	664.0
	2.0	1.6	3.1	5.0	8.1	0.0	6	0.0	691.0
FDD134	4.0	2.4	1.9	4.1	6.0	0.0	3	0.1	382.0
	2.0	1.2	7.3	1.0	8.3	0.0	16	1.2	409.0
	4.0	2.4	6.1	3.6	9.7	0.0	15	0.0	429.0
FDD135	13.8	8.4	12.3	21.7	34.0	0.3	15	0.3	368.0
	4.9	2.9	19.1	38.0	57.1	0.5	17	0.5	369.2

*ETW = estimated true width, based on assumed sub-vertical lode orientation striking at 070°

FEDERATION

JORC Code 2012 (Table 1) - Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. AusIMM.

Section 1 - Sampling Techniques and Data (Criteria in this section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. 	<ul style="list-style-type: none"> RC percussion and diamond core drilling at Federation has been undertaken by Budd Exploration Drilling Pty Limited and Mitchell Services Limited. Chip samples were collected using a rotary cone or riffle splitter directly off the drill rig. All samples were collected on a dry basis. Core samples were defined by Aurelia geologist during logging to honour, geological and mineralogical boundaries, cut in half by diamond saw, with half core sent to external laboratories.
	<ul style="list-style-type: none"> Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. 	<ul style="list-style-type: none"> Sampling and QAQC procedures are carried out using Aurelia Metal's protocols as per industry best practice. Drilling is oriented perpendicular to the strike of the mineralisation as much as possible to ensure a representative sample is collected.
	<ul style="list-style-type: none"> Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> RC drilling was used to obtain representative samples of 1 metre length. Diamond drilling was used to obtain core samples of a nominal 1 metre length. RC chips were sub-sampled off the rig with a rotary cone or riffle splitter to produce samples of between 2 to 4 kg. Core and RC samples are dried, crushed and pulverised to 85% passing 75 microns. This is considered to appropriately homogenise the sample. Gold analysis is by 30g fire assay with AAS finish, (method Au – AA25) with a detection level of 0.01ppm. For base metals a 0.5g charge is dissolved using aqua regia digestion (Method ICP41-AES) with detection levels of: Ag-0.2ppm, As-2ppm, Cu-1ppm, Fe-0.01%, Pb-2ppm, S-0.01%, Zn-2ppm. Overlimit analysis is by OG46 - aqua regia digestion with ICP-AES finish. Gold samples greater than 0.2g/t are re-assayed by screen fire assay using the entire sample to improve accuracy, especially where coarse gold is present.
Drilling techniques	<ul style="list-style-type: none"> Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.). 	<ul style="list-style-type: none"> Drilling by triple tube diamond coring generally commences as PQ core until fresh rock is reached. The PQ rods are left as casing then HQ coring is employed. NQ coring is also used (particularly in wedge holes). Reverse circulation percussion (RC) methods used in this program utilised a face sampling 143 millimetre bit. Pre-collars with RC down to between 100 and 350 metres below surface are also employed at Federation.

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. 	<ul style="list-style-type: none"> RC percussion and diamond core drilling at Federation has been undertaken by Budd Exploration Drilling Pty Limited and Mitchell Services Limited. Chip samples were collected using a rotary cone or riffle splitter directly off the drill rig. All samples were collected on a dry basis. Core samples were defined by Aurelia geologist during logging to honour, geological and mineralogical boundaries, cut in half by diamond saw, with half core sent to external laboratories.
	<ul style="list-style-type: none"> Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. 	<ul style="list-style-type: none"> Sampling and QAQC procedures are carried out using Aurelia Metal's protocols as per industry best practice. Drilling is oriented perpendicular to the strike of the mineralisation as much as possible to ensure a representative sample is collected.
	<ul style="list-style-type: none"> Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> RC drilling was used to obtain representative samples of 1 metre length. Diamond drilling was used to obtain core samples of a nominal 1 metre length. RC chips were sub-sampled off the rig with a rotary cone or riffle splitter to produce samples of between 2 to 4 kg. Core and RC samples are dried, crushed and pulverised to 85% passing 75 microns. This is considered to appropriately homogenise the sample. Gold analysis is by 30g fire assay with AAS finish, (method Au – AA25) with a detection level of 0.01ppm. For base metals a 0.5g charge is dissolved using aqua regia digestion (Method ICP41-AES) with detection levels of: Ag-0.2ppm, As-2ppm, Cu-1ppm, Fe-0.01%, Pb-2ppm, S-0.01%, Zn-2ppm. Overlimit analysis is by OG46 - aqua regia digestion with ICP-AES finish. Gold samples greater than 0.2g/t are re-assayed by screen fire assay using the entire sample to improve accuracy, especially where coarse gold is present.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain 	<ul style="list-style-type: none"> Chip recoveries are generally monitored visually at the rig by the size of the individual bags. Any low recoveries will be noted by the geologist at the rig. Recoveries for core are generally greater than 95% once in fresh rock. Measures taken to maximise recovery include triple tube drilling in soft or broken rock and slower drilling rates in poor ground. The relationship between sample recovery and grade has been assessed for diamond core samples through the use of conditional expectation plots and scatter plots. No obvious relationship exists and sample bias due to the preferential loss or gain of material is not considered to be significant to the resource estimate. The relationship between sample recovery and grade for RC sampling has not been assessed.

<p>Logging</p>	<ul style="list-style-type: none"> • <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i> 	<p>Systematic geological and geotechnical logging is undertaken. Data collected includes:</p> <ul style="list-style-type: none"> • Nature and extent of lithologies • Relationship between lithologies • Amount and mode of occurrence of ore minerals • Location, extent and nature of structures such as bedding, cleavage, veins, faults etc. (core only) • Structural data (alpha & beta) are recorded for orientated core (core only) • Geotechnical data such as recovery, RQD, fracture frequency, qualitative IRS, microfractures, veinlets and number of defect sets. For some geotechnical holes the orientation, nature of defects and defect fill are recorded (core only) • Bulk density by Archimedes principle at regular intervals (core only) • Both qualitative and quantitative data is collected • 100% of all recovered core is geologically and geotechnically logged, 100% of all recovered chips are geologically logged. • The geological and geotechnical logging is considered to have been carried out at a sufficient level of detail to support Mineral Resource estimation
<p>Sub-sampling techniques and sample preparation</p>	<ul style="list-style-type: none"> • <i>If core, whether cut or sawn and whether Quarter, half or all core taken.</i> • <i>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</i> 	<ul style="list-style-type: none"> • Core is sawn with half core submitted for assay. Sampling is consistently on one side of the orientation line so that the same part of the core is sent for assay. PQ core is ¼ sampled. • All RC samples were split using a rotary cone or riffle sampler directly off the drilling rig. Two samples were collected for every metre to allow for duplicate samples to be taken at any interval. All sampling was on a dry basis.
	<ul style="list-style-type: none"> • <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> • <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> • <i>Measures taken to ensure that the sampling is representative of the insitu material collected, including for instance results for field duplicate/second- half sampling.</i> • <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> • Samples are dried, crushed and pulverised to 85% passing 75 microns. This is considered to appropriately homogenise the sample to allow subsampling for the various assay techniques. • Certified Standard Reference Materials and blanks are inserted at least every 25 samples to assess the accuracy and reproducibility. The results of the standards are to be within ±10% variance, or 2 standard deviations, from known certified result. If greater than 10% variance the standard and up to 10 samples each side are re-assayed. ALS conduct internal check samples every 20 samples for Au and every 20 for base metals. Assay grades are occasionally compared with mineralogy logging estimates. If differences are detected a re-assay can be carried out using the bulk reject or the assay pulp. • Systematic duplicate sampling was employed during the Federation RC program. A regular duplicate was taken at predetermine sample intervals (averaging 1:25 samples). Further, samples occurring in mineralised zones are duplicated, increasing the duplicate rate to one sample every 15-20 samples. • Sample sizes are considered appropriate for the material being sampled.

<p>Quality of assay data and laboratory test</p>	<ul style="list-style-type: none"> • <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> • <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i> 	<ul style="list-style-type: none"> • Standard assay procedures performed by a reputable assay lab (ALS Group) were undertaken. Gold assays are by 30g fire assay with AAS finish, (method Au-AA25). Ag, As, Cu, Fe, Pb, S, Zn are digested in aqua regia then analysed by ICP-AES (method ME-ICP41). Comparison with 4 acid digestion indicate that the technique is considered total for Ag, As, Cu, Pb, S, Zn. Fe may not be totally digested by aqua regia but near total digestion occurs. A small number of samples from Federation were also assayed by Intertek Genalysis in Townsville using comparable methods. Gold samples greater than 0.2g/t were re-assayed by screen fire assay using the entire sample to improve accuracy. • No geophysical tools were used in the determination of assay results. All assay results were generated by an independent third-party laboratory as described above. • Certified reference material or blanks are inserted at least every 25 samples. Standards are purchased from Certified Reference Material manufacture companies: Ore Research and Exploration, Gannet Holdings Pty Ltd and Geostats Pty Ltd. Standards were purchased in foil lined packets of between 60g and 100g. Different reference materials are used to cover high grade, medium grade and low grade ranges of elements: Au, Ag, Pb, Zn Cu, Fe, S and As. The standard names on the foil packages were erased before going into the pre-numbered sample bag and the standards are submitted to the lab blind.
<p>Verification of sampling and assaying</p>	<ul style="list-style-type: none"> • <i>The verification of significant intersections by either independent or alternative company personnel.</i> • <i>The use of twinned holes.</i> • <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> 	<ul style="list-style-type: none"> • All significant drilling intersection are verified by multiple Company personnel. • Due to the relatively recent discovery history at Federation, no twinned holes have been used at this stage. • Drill hole data including meta data, any gear left in the drill hole, lithological, mineral, survey, sampling and occasionally magnetic susceptibility is collected and entered directly into a Logchief database using drop down codes. When complete the Logchief database XML file is emailed to an external geological database administrator, the data is validated and uploaded into an SQL database. • Assay data is provided by ALS via .csv spreadsheets. The data is validated using the results received from the known certified reference material. Using an SQL based query the assay data is merged into the database.

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. 	<ul style="list-style-type: none"> RC percussion and diamond core drilling at Federation has been undertaken by Budd Exploration Drilling Pty Limited and Mitchell Services Limited. Chip samples were collected using a rotary cone or riffle splitter directly off the drill rig. All samples were collected on a dry basis. Core samples were defined by Aurelia geologist during logging to honour, geological and mineralogical boundaries, cut in half by diamond saw, with half core sent to external laboratories.
	<ul style="list-style-type: none"> Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. 	<ul style="list-style-type: none"> Sampling and QAQC procedures are carried out using Aurelia Metal's protocols as per industry best practice. Drilling is oriented perpendicular to the strike of the mineralisation as much as possible to ensure a representative sample is collected.
	<ul style="list-style-type: none"> Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> RC drilling was used to obtain representative samples of 1 metre length. Diamond drilling was used to obtain core samples of a nominal 1 metre length. RC chips were sub-sampled off the rig with a rotary cone or riffle splitter to produce samples of between 2 to 4 kg. Core and RC samples are dried, crushed and pulverised to 85% passing 75 microns. This is considered to appropriately homogenise the sample. Gold analysis is by 30g fire assay with AAS finish, (method Au – AA25) with a detection level of 0.01ppm. For base metals a 0.5g charge is dissolved using aqua regia digestion (Method ICP41-AES) with detection levels of: Ag-0.2ppm, As-2ppm, Cu-1ppm, Fe-0.01%, Pb-2ppm, S-0.01%, Zn-2ppm. Overlimit analysis is by OG46 - aqua regia digestion with ICP-AES finish. Gold samples greater than 0.2g/t are re-assayed by screen fire assay using the entire sample to improve accuracy, especially where coarse gold is present.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Drill hole collars are initially located using hand held GPS to ±5m. Upon completion collars are located with differential GPS to ±5cm picked up by the mine surveyors. Drill holes are downhole-surveyed from collar to the end of hole by drilling personnel using downhole survey tool (Reflex). Downhole north-seeking gyroscopic survey instruments have also been regularly employed at Federation to improve survey accuracies. Drill holes are surveyed by single shot camera during drilling at intervals ranging between 6-30m. All survey data for every hole is checked and validated by Aurelia Metals personnel before being entered into the database. All coordinates are based on Map Grid Australia zone 55H Topographic control is considered adequate as it is based on a high precision Lidar survey completed over the area in 2019.

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <i>Nature and quality of sampling (e.g. cut channels, random chips or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i> 	<ul style="list-style-type: none"> RC percussion and diamond core drilling at Federation has been undertaken by Budd Exploration Drilling Pty Limited and Mitchell Services Limited. Chip samples were collected using a rotary cone or riffle splitter directly off the drill rig. All samples were collected on a dry basis. Core samples were defined by Aurelia geologist during logging to honour, geological and mineralogical boundaries, cut in half by diamond saw, with half core sent to external laboratories.
	<ul style="list-style-type: none"> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> 	<ul style="list-style-type: none"> Sampling and QAQC procedures are carried out using Aurelia Metal's protocols as per industry best practice. Drilling is oriented perpendicular to the strike of the mineralisation as much as possible to ensure a representative sample is collected.
	<ul style="list-style-type: none"> <i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> RC drilling was used to obtain representative samples of 1 metre length. Diamond drilling was used to obtain core samples of a nominal 1 metre length. RC chips were sub-sampled off the rig with a rotary cone or riffle splitter to produce samples of between 2 to 4 kg. Core and RC samples are dried, crushed and pulverised to 85% passing 75 microns. This is considered to appropriately homogenise the sample. Gold analysis is by 30g fire assay with AAS finish, (method Au – AA25) with a detection level of 0.01ppm. For base metals a 0.5g charge is dissolved using aqua regia digestion (Method ICP41-AES) with detection levels of: Ag-0.2ppm, As-2ppm, Cu-1ppm, Fe-0.01%, Pb-2ppm, S-0.01%, Zn-2ppm. Overlimit analysis is by OG46 - aqua regia digestion with ICP-AES finish. Gold samples greater than 0.2g/t are re-assayed by screen fire assay using the entire sample to improve accuracy, especially where coarse gold is present.
Data spacing and distribution	<ul style="list-style-type: none"> <i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> As the prospect discussed represents a relatively new discovery, data spacing is extremely variable. Drill hole spacing at Federation ranges from 25 to 125 metres. The drill spacing is considered appropriate to support the predominantly Inferred classification for the Federation MRE. Additional closer spaced drilling will be required in the future to upgrade the resource to higher classifications. Sample compositing is not applied.

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <i>Nature and quality of sampling (e.g. cut channels, random chips or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i> 	<ul style="list-style-type: none"> RC percussion and diamond core drilling at Federation has been undertaken by Budd Exploration Drilling Pty Limited and Mitchell Services Limited. Chip samples were collected using a rotary cone or riffle splitter directly off the drill rig. All samples were collected on a dry basis. Core samples were defined by Aurelia geologist during logging to honour, geological and mineralogical boundaries, cut in half by diamond saw, with half core sent to external laboratories.
	<ul style="list-style-type: none"> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> 	<ul style="list-style-type: none"> Sampling and QAQC procedures are carried out using Aurelia Metal's protocols as per industry best practice. Drilling is oriented perpendicular to the strike of the mineralisation as much as possible to ensure a representative sample is collected.
	<ul style="list-style-type: none"> <i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> RC drilling was used to obtain representative samples of 1 metre length. Diamond drilling was used to obtain core samples of a nominal 1 metre length. RC chips were sub-sampled off the rig with a rotary cone or riffle splitter to produce samples of between 2 to 4 kg. Core and RC samples are dried, crushed and pulverised to 85% passing 75 microns. This is considered to appropriately homogenise the sample. Gold analysis is by 30g fire assay with AAS finish, (method Au – AA25) with a detection level of 0.01ppm. For base metals a 0.5g charge is dissolved using aqua regia digestion (Method ICP41-AES) with detection levels of: Ag-0.2ppm, As-2ppm, Cu-1ppm, Fe-0.01%, Pb-2ppm, S-0.01%, Zn-2ppm. Overlimit analysis is by OG46 - aqua regia digestion with ICP-AES finish. Gold samples greater than 0.2g/t are re-assayed by screen fire assay using the entire sample to improve accuracy, especially where coarse gold is present.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> Drilling is orientated to cross the interpreted, steeply dipping mineralisation trend at moderate to high angles. Holes are drilled from both the footwall and hangingwall of the mineralisation where possible. Estimated true widths for each significant interval are provided in Table 2. No known bias has been introduced due to drilling orientation.

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <i>Nature and quality of sampling (e.g. cut channels, random chips or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i> 	<ul style="list-style-type: none"> RC percussion and diamond core drilling at Federation has been undertaken by Budd Exploration Drilling Pty Limited and Mitchell Services Limited. Chip samples were collected using a rotary cone or riffle splitter directly off the drill rig. All samples were collected on a dry basis. Core samples were defined by Aurelia geologist during logging to honour, geological and mineralogical boundaries, cut in half by diamond saw, with half core sent to external laboratories.
	<ul style="list-style-type: none"> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> 	<ul style="list-style-type: none"> Sampling and QAQC procedures are carried out using Aurelia Metal's protocols as per industry best practice. Drilling is oriented perpendicular to the strike of the mineralisation as much as possible to ensure a representative sample is collected.
	<ul style="list-style-type: none"> <i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> RC drilling was used to obtain representative samples of 1 metre length. Diamond drilling was used to obtain core samples of a nominal 1 metre length. RC chips were sub-sampled off the rig with a rotary cone or riffle splitter to produce samples of between 2 to 4 kg. Core and RC samples are dried, crushed and pulverised to 85% passing 75 microns. This is considered to appropriately homogenise the sample. Gold analysis is by 30g fire assay with AAS finish, (method Au – AA25) with a detection level of 0.01ppm. For base metals a 0.5g charge is dissolved using aqua regia digestion (Method ICP41-AES) with detection levels of: Ag-0.2ppm, As-2ppm, Cu-1ppm, Fe-0.01%, Pb-2ppm, S-0.01%, Zn-2ppm. Overlimit analysis is by OG46 - aqua regia digestion with ICP-AES finish. Gold samples greater than 0.2g/t are re-assayed by screen fire assay using the entire sample to improve accuracy, especially where coarse gold is present.
Sample security	<ul style="list-style-type: none"> <i>The measures taken to ensure sample security</i> 	<ul style="list-style-type: none"> Chain of custody is managed by Aurelia Metals. Samples are placed in tied calico bags with sample numbers that provide no information on the location of the sample. Samples are transported from site to the assay lab by courier or directly delivered by Aurelia Metals personnel.
Audits or reviews	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data</i> 	<ul style="list-style-type: none"> No audit or review of the sampling regime at Federation has been directly completed. However, an audit and review of the sampling regime at Hera, which uses identical sampling procedures, was undertaken by H&S Consultants in November 2015. Recommendations from this review form part of the current sampling practices at Hera and regionally.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> The Federation prospect is located within Exploration Licence 6162, owned 100% by Hera Resources Pty. Ltd. (a wholly owned subsidiary of Aurelia Metals Limited) At the time of reporting there were no known impediments to operating in these areas
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> The area has a 50 year exploration history involving reputable companies such as Cyprus Mines, Buka, ESSO Minerals, CRAE, Pasmaenco, Triako Resources and CBH Resources. Previous exploration data has been ground-truthed where possible. Historic drill hole collars have been relocated and surveyed. YTC Resources completed a total of four, relatively shallow RC drill holes at the Federation prospect in 2013, prior to the discovery of high grade mineralisation in 2019.
Geology	<p>Deposit type, geological setting and style of mineralisation.</p>	<ul style="list-style-type: none"> All known mineralisation in the area is epigenetic "Cobar" style. Deposits are generally structurally controlled quartz + sulphide matrix breccias grading to massive sulphide. In a similar fashion to the other Cobar deposits, the Federation prospect occurs to the west of the Rookery Fault, a major regional structure with over 300km strike length. The deposits are near the boundary of the Devonian Lower Amphitheatre Group and the underlying Roset Sandstone. Both units show moderate to strong ductile deformation with tight upright folding coincident with greenschist facies regional metamorphism. A well-developed sub vertical cleavage is present. Mineralisation at Federation occurs in several steeply dipping vein breccia/massive sulphide lenses developed in the centre of a broad NE-SW striking corridor of quartz-sulphide vein stockwork mineralisation. The mineralisation is hosted by fine-grained sedimentary rocks and is best developed within open upright anticline closures in areas of strong rheology contrast imposed by early stratiform alteration. Sulphide mineralisation identified at Federation include sphalerite-galena±chalcopyrite-pyrrhotite-pyrite in veins and breccias. Gold distribution tends to be nuggetty, often present as visible gold grains up to four millimetres in size. The majority of high grade gold mineralisation at Federation (to date) is present in steeply plunging, short strike-length zones.

<p>Drill hole Information</p>	<ul style="list-style-type: none"> • A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> ○ easting and northing of the drill hole collar ○ elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar ○ dip and azimuth of the hole ○ down hole length and interception depth ○ hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> • All relevant drill hole data is included in the main body of the report.
<p>Data aggregation methods</p>	<ul style="list-style-type: none"> • In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> • Exploration results have been reported on a length-weighted basis. No top-cut or grade truncations have been applied to any assay results. Composite intervals are reported using a nominal \$50NSR threshold. Internal dilution of up to 3 metres has been allowed. • Higher grade results that occur internal to the composited intervals as described above are included in this report. Higher grade intervals are only highlighted if there are areas within the composite that differ significantly from the overall grades. Reporting of the shorter intercepts allows a more complete understanding of the grade distribution within the mineralised zone. • No metal equivalences are quoted in this report.
<p>Relationship between mineralisation</p>	<ul style="list-style-type: none"> • These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with 	<ul style="list-style-type: none"> • While the controls and geometry of mineralisation at Federation are locally structurally complex, the deposit has an overall NNE strike (070°) and a sub-vertical dip. • Estimated true widths for each significant interval are provided in Table 2.

<p>widths and intercept lengths</p>	<p>respect to the drill hole angle is known, its nature should be reported.</p> <ul style="list-style-type: none"> • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known'). 	
<p>Diagrams</p>	<ul style="list-style-type: none"> • Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> • See body of report.
<p>Balanced reporting</p>	<ul style="list-style-type: none"> • Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> • All drill results from the recent program are given in this report or have been reported in full in previous announcements.
<p>Other substantive exploration data</p>	<ul style="list-style-type: none"> • Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> • See body of report.
<p>Further work</p>	<ul style="list-style-type: none"> • The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). • Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> • Future work is discussed in the body of the text.