

27 February 2023

ABOUT ADRIATIC METALS (ASX:ADT, LSE:ADT1, OTCQX:ADMLF)

Adriatic Metals Plc is focused on the development of the 100%-owned, Vares high-grade silver project in Bosnia & Herzegovina, and exploration at the Raska base & precious metals project in Serbia.

DIRECTORS

Mr Michael Rawlinson
NON-EXECUTIVE CHAIRMAN

Mr Paul Cronin
MANAGING DIRECTOR & CEO

Mr Peter Bilbe
NON-EXECUTIVE DIRECTOR

Mr Julian Barnes
NON-EXECUTIVE DIRECTOR

Ms Sandra Bates
NON-EXECUTIVE DIRECTOR

Ms Sanela Karic
NON-EXECUTIVE DIRECTOR

adriaticmetals.com

RUPICE NORTHWEST INFILL DRILLING CONFIRMS CONTINUITY & HIGH GRADES

HIGHLIGHTS

- Exploration drilling at Rupice Northwest ("Rupice NW") in 2022 was successful with the trend of thick, high-grade massive sulphide mineralisation continuing.
- In 2023 Rupice NW drilling continues to infill mineralisation to an Indicated resource level of confidence and to close-out mineralisation currently open up-dip and down-dip on every section.
- In February 2023 the 'Gap', separating Rupice and Rupice NW, was drilled, with the first hole intersecting massive sulphide mineralisation and an extensive mineralised footwall zone. Assay results from the first Gap hole are still pending.
- Rupice NW and Gap drilling will continue until an updated 2023 Rupice Mineral Resource ("RMR"), inclusive of Rupice NW, can be released.
- Exploration in 2023 will also focus on drill testing multiple Vares regional targets, including Droskovac, Rupice West, Semizova Ponikva and Vares East.
- A total of 23,700m of diamond drilling from 86 holes, using four drill rigs, is planned for Rupice NW and regional targets in 2023, together with geophysical surveys, surface sampling and detailed mapping.



Presented below are the significant intercepts assay results from seven Rupice NW exploration drill holes, additional to the previous twenty-one holes reported in 2022 marking a total of 28 drill holes completed last year. All holes are located on section lines between previously reported results. The Presented assay results are in addition to the previous results announced for Rupice NW on 12 January 2023.

Drillhole Highlights

Drillholes BR-25-22, BR-27-22, BR-29-22, BR-30-22 and BR-32-22 are located on a single section line 180m northwest of the RMR and drilled down-plunge of the previously reported hole BR-04-22 (32.50m at 657.0 g/t AgEq). The drill holes intercepted:

- BR-25-22 (*NW Upper Zone*) – **8.40m at 166.8 g/t AgEq, 5.36% ZnEq** (24.9 g/t Ag, 1.68% Zn, 0.93% Pb, 0.23 g/t Au, 0.14% Cu, 3.5% BaSO₄, 0.59% Sb) from 162.10m;
- BR-25-22 (*NW Main Zone*) – **43.20m at 671.6 g/t AgEq, 21.60% ZnEq** (148.2 g/t Ag, 7.14% Zn, 5.82% Pb, 0.85 g/t Au, 0.60% Cu, 49.5% BaSO₄, 0.26% Sb) from 256.80m -
 - including **6.00m at 1,432.8 g/t AgEq, 46.07% ZnEq** (252.7g/t Ag, 17.15% Zn, 16.15% Pb, 1.96 g/t Au, 1.46% Cu, 35.2% BaSO₄, 0.76% Sb) from 281.40m;
- BR-30-22 (*NW Main Zone*) – **34.50m at 987.5 g/t AgEq, 31.75% ZnEq** (183.1 g/t Ag, 14.88% Zn, 8.11% Pb, 1.12 g/t Au, 0.94% Cu, 36.6% BaSO₄, 0.18% Sb) from 211.80m -
 - Including **11.80m at 1,669.4 g/t AgEq, 53.68% ZnEq** (229.4 g/t Ag, 26.11% Zn, 15.44% Pb, 1.53 g/t Au, 1.90 g/t Au, 32.0% BaSO₄, 0.27% Sb) from 226.00m;
- BR-27-22 (*NW Upper Zone*) – **3.30m at 206.1 g/t AgEq, 6.62% ZnEq** (50.0 g/t Ag, 1.93% Zn, 0.70% Pb, 0.38g/t Au, 0.19% Cu, 24.2% BaSO₄, 0.12% Sb) from 163.80m;
- BR-27-22 (*NW Main Zone*) – **41.20m at 409.2 g/t AgEq, 13.16% ZnEq** (93.0g/t Ag, 3.65% Zn, 2.10% Pb, 1.14g/t Au, 0.33% Cu, 36.8% BaSO₄, 0.09% Sb) from 263.80m;
- BR-29-22 (*NW Upper Zone*) – **6.10m at 140.3 g/t AgEq, 4.51% ZnEq** (30.3 g/t Ag, 1.71% Zn, 0.89% Pb, 0.22 g/t Au, 0.13% Cu, 3.0% BaSO₄, 0.19% Sb) from 160.90m;
- BR-29-22 (*NW Mid-Zone*) – **18.40m at 166.7 g/t AgEq, 5.36% ZnEq** (91.5g/t Ag, 1.72% Zn, 0.34% Pb, 0.00 g/t Au, 0.00% Cu, 10.2% BaSO₄, 0.13% Sb) from 237.00m;
- BR-29-22 (*NW Main Zone*) – **33.40m at 662.7 g/t AgEq, 21.31% ZnEq** (120.1 g/t Ag, 8.26% Zn, 4.34% Pb, 1.45 g/t Au, 0.31% Cu, 48.9% BaSO₄, 0.22% Sb) from 269.60m;
- BR-32-22 (*NW Upper Zone*) – **9.40m at 870.9 g/t AgEq, 28.00% ZnEq** (213.4 g/t Ag, 7.11% Zn, 3.51% Pb, 1.78 g/t Au, 0.30% Cu, 42.6% BaSO₄, 2.40% Sb) from 170.20m;
- BR-32-22 (*NW Mid-Zone*) – **3.00m at 654.4 g/t AgEq, 21.04% ZnEq** (424.6 g/t Ag, 3.65% Zn, 5.15% Pb, 0.10 g/t Au, 0.53% Cu, 1.2% BaSO₄, 0.08% Sb) from 223.00m;
- BR-32-22 (*NW Mid-Zone*) – **6.00m at 759.3 g/t AgEq, 24.41% ZnEq** (591.0 g/t Ag, 4.16% Zn, 2.42% Pb, 0.00 g/t Au, 0.03% Cu, 30.1% BaSO₄, 0.04% Sb) from 238.00m;
- BR-32-22 (*NW Main Zone*) – **13.60m at 192.2 g/t AgEq, 6.18% ZnEq** (79.6 g/t Ag, 1.61% Zn, 0.91% Pb, 0.19 g/t Au, 0.04% Cu, 20.0% BaSO₄, 0.05% Sb) from 260.00m;
- BR-32-22 (*NW Main Zone*) – **23.00m at 577.5 g/t AgEq, 18.57% ZnEq** (181.0 g/t Ag, 6.46% Zn, 3.13% Pb, 0.90 g/t Au, 0.22% Cu, 45.8% BaSO₄, 0.06% Sb) from 277.00m.

Drillhole BR-26-22 is located 100m northwest of the RMR and drilled down-dip of the previously reported hole BR-23-22 (28.90m at 695.0 g/t AgEq), BR-20-22 (30.30m at 932.0 g/t AgEq) and BR-09-22 (11.80m at 1,212 g/t AgEq). Drilling intercepted:

- BR-26-22 (*NW Upper Zone*) – **14.80m at 545.0 g/t AgEq, 17.53% ZnEq** (191.2 g/t Ag, 4.08% Zn, 2.45% Pb, 0.95 g/t Au, 0.40% Cu, >50.0% BaSO₄, 0.30% Sb) from 148.20m;
- BR-26-22 (*NW Main Zone*) – **5.70m at 296.4 g/t AgEq, 9.53% ZnEq** (96.4 g/t Ag, 2.76% Zn, 1.27% Pb, 0.41 g/t Au, 0.08% Cu, 35.7% BaSO₄, 0.10% Sb) from 253.10m;



- BR-26-22 (NW Main Zone) – 21.10m at 527.5 g/t AgEq, 16.96% ZnEq (231.5 g/t Ag, 4.95% Zn, 2.47% Pb, 0.62 g/t Au, 0.17% Cu, 38.2% BaSO₄, 0.03% Sb) from 266.00m.

Paul Cronin, Adriatic's Managing Director and CEO, commented:

"These latest high-grade assay results confirm that 2022 was a highly successful year for exploration at our Vares Project. Rupice NW is delivering outstanding results that will continue to grow the Rupice mineralisation inventory and life of mine. Today's new exploration results validate the continuity, grade and thickness of Rupice NW, with the added bonus of multiple expanding mineralised horizons.

In 2023 the enlarged exploration team will focus on closing-off mineralisation at Rupice and Rupice NW, with a total of 23,700m of drilling planned from four diamond drill rigs. New geological and mineralisation models have provided powerful tools in visualising new opportunities and a detailed roadmap of drilling targets. I am delighted that the mineralisation gap between Rupice and Rupice NW has now decreased to just 50m with the recent completion of the first hole into this area.

We are looking ahead to future where Vares is the hub for multiple Adriatic mines. In 2023, we will drill test the Droskovac, Semizova Ponikva and Rupice West prospects and commence systematic grassroots exploration of Vares East. With the quality of targets available, a dynamic exploration team and already being in a region of exceptional mineralisation endowment, Adriatic is well placed to supplement Rupice production with new regional ore sources."

RUPICE NORTHWEST EXPLORATION RESULTS

Adriatic Metals PLC (ASX:ADT, LSE:ADT1, OTCQX:ADMLF) ("Adriatic" or the "Company") is pleased to report on recent exploration results at the Company's flagship Vares Silver Project in Bosnia & Herzegovina.


As previously announced on the 12 January 2023, exploration drilling intersected high-grade mineralisation in drill holes BR-11-22, BR-14-22, BR-15-22, BR-16-22, BR-18-22, BR-20-22, BR-22-22 and BR-23-22, located 85m to 250m northwest of the existing RMR. Subsequently, the Company has focused exploration activities on testing this potential Rupice northwest extension ("Rupice NW") with continued success. Results from new drill holes BR-25-22, BR-26-22, BR-27-22, BR-28-22, BR-29-22, BR-30-22 and BR-32-22 are detailed.

Drill hole BR-26-22 extended the previously known mineralisation to 130m width as well as confirmed continuity within the Upper Zone of mineralisation. Drill holes BR-25-22, BR-27-22, BR-29-22 and BR-30-22 extended the previously known mineralisation 30m down-plunge of drill hole BR-04-22, infilling the gap between BR-04-22 and the northern cross-section.

Drilling continues in 2023 to extend Rupice and Rupice NW mineralisation up- and down-dip, along-strike and within drilling gaps identified by 3D modelling of sulphides. The Q1 2023 priority is to fully define Rupice NW and to connect it to the main RMR across a 90m drilling gap. In 2023 drilling commenced on 10 January. The first positive intersection of massive sulphides in the Gap zone occurred in early February (assays pending). A Mineral Resource Estimate ("MRE") will be completed for Rupice and Rupice NW once drilling is advanced enough to better define the extents and potential connection of Rupice NW and Rupice mineralised bodies.



Figure 1: Plan view map of Rupice and location of recent drilling activity

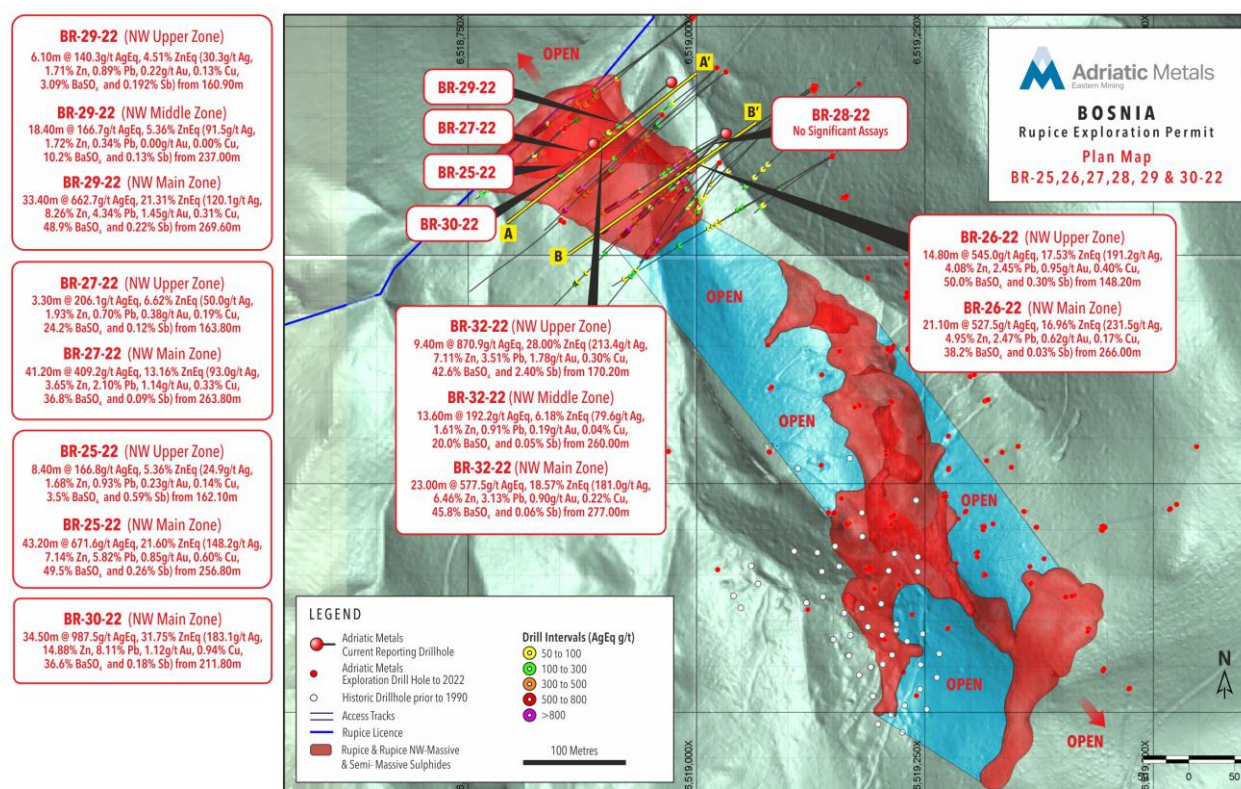

Note 1: Sections A-A', B-B' offset to southeast of section lines to not obscure drill holes traces.

Note 2: BaSO₄ results capped at 50% on holes returning assays >50% BaO and waiting return of high range results.

2022 Exploration Works

As previously announced on 12 January 2023, step-out exploration drilling intersected high-grade mineralisation in drill holes BR-11-22, BR-14-22, BR-15-22, BR-16-22, BR-18-22, BR-20-22, BR-22-22 and BR-23-22, located 85m to 250m northwest of the existing RMR. The Company continued exploration activities to define the Rupice NW extension closing-in the drilling pattern to 40m spaced lines with holes drilled in fans to achieve a 25m to 30m separation between mineralisation intersections on the drill lines (sections).

The new results have shown continuity of mineralisation down-dip and down-plunge from previous reported drill holes BR-04-22, BR-09-22, BR-20-22 and BR-23-22. Hole BR-26-22 extended the previously known mineralisation to 130m width as well as confirmed continuity within the Upper Zone of Rupice NW mineralisation.

In 2022 Rupice NW drilling was successful in defining and expanding mineralisation over a strike length of 250m with both the NW and SE strike extents remaining open. 2022 drilling was not sufficient to close-off mineralisation. The focus of drilling was on the central, thickest portion of mineralisation and rapidly moving from drilling 80m spaced sections to 40m spaced sections once the grade, thickness and continuity of mineralisation was defined. Closing-in the drill spacing was aligned with Adriatic's strategy of adding Rupice NW into an updated Rupice MRE in 2023.

Definition of Rupice NW has rapidly advanced the understanding of not only Rupice NW, but also the Rupice Main deposit. Identification that mineralisation occurs at multiple horizons in the stratigraphy, is not restricted to massive and semi-massive styles, as well as having extensive narrower but high grade up-dip and down-dip extensions has been applied to the revision of the Rupice geological and mineralisation models as part of the Rupice 2023 resource update process.

Figure 2: Cross-section (A'-A) through BR-25-22, BR-27-22, BR-29-22, BR-30-22 and BR-32-22

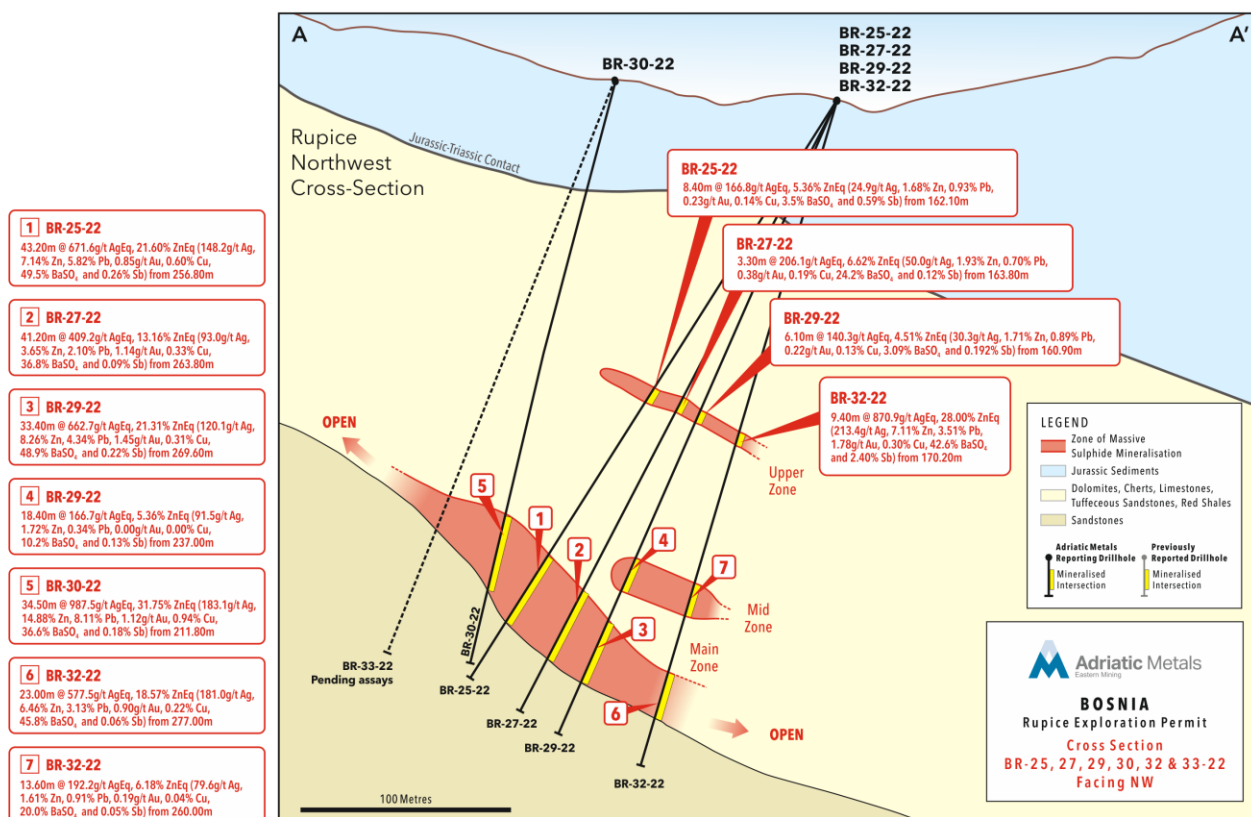




Figure 3: Cross-section (B-B') through BR-26-22 and BR-28-22


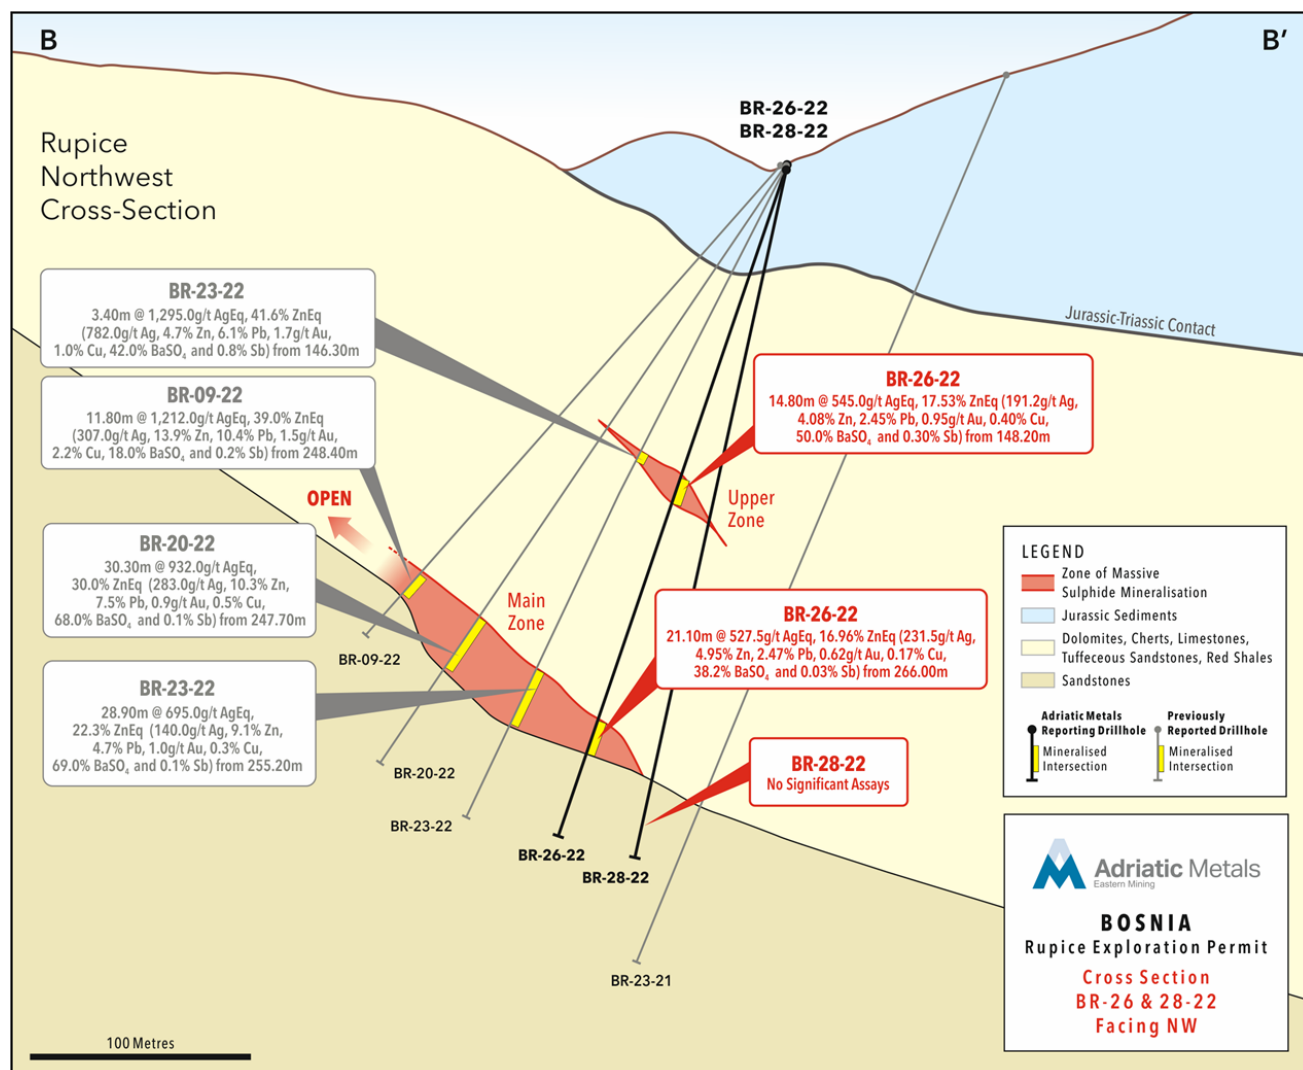




Figure 4: Long-Section of Rupice looking southwest.

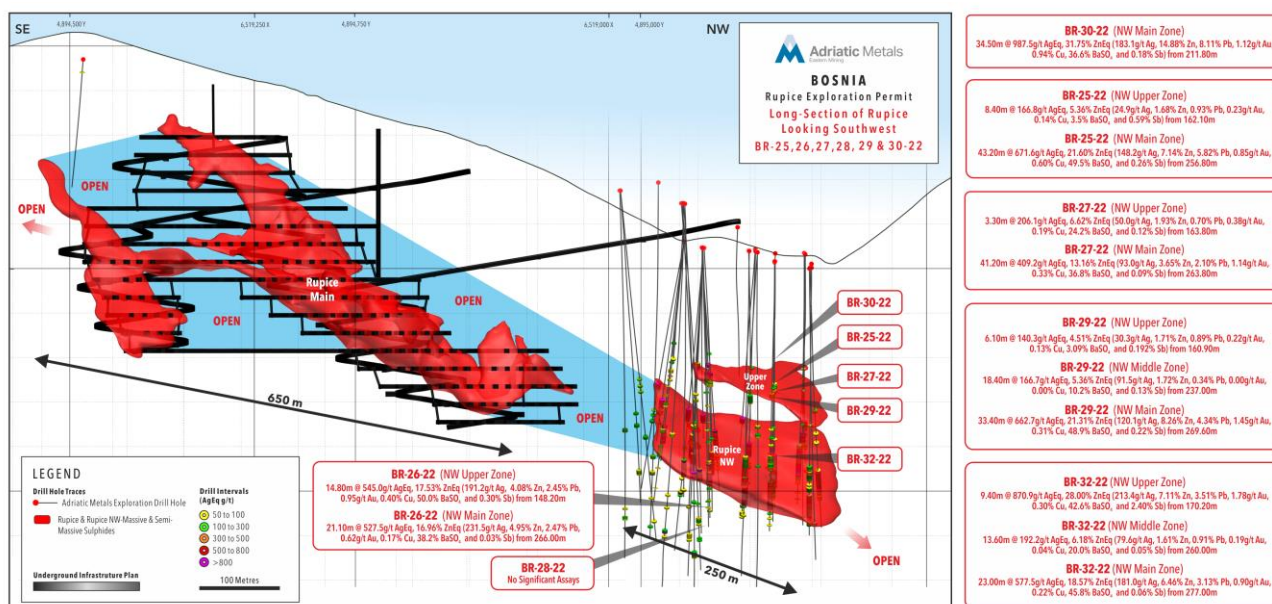

2023 Exploration Plan


Exploration drilling resumed at Rupice NW on the 10 January 2023 with three diamond drill rigs. In Q1 2023 the focus is on completion of 'Gap' drilling to define the connectivity between Rupice and Rupice NW. A horizontal separation of 90m is to be drilled-out across three planned sections from surface. The first Gap hole (BR-04-23) was drilled in February and successfully intersected massive sulphides ~40m from Rupice NW, extending the mineralisation to a strike extent of 290m and only 50m from the RMR (assays are pending). In parallel with the Gap drilling, two rigs are focussed on completion of Rupice NW infill sections, as well as up- and down-dip extension drilling prior to a 2023 Rupice resource update.

With arrival of a fourth diamond drill rig in Q2 2023 and completion of Rupice NW resource definition, exploration focus will shift to the main Rupice orebody and regional exploration. 2022 learnings, as well as revised geological and mineralisation models, have opened-up the potential for the main Rupice orebody to be expanded up-dip, down-dip and to the southeast. Step-out drilling designed to test these areas will add new mineralisation to Rupice resources and reserves and increase the Rupice life of mine.

Commitment to regional exploration and advancing the Vares exploration pipeline will run in parallel with Rupice resource development as of Q2 2023. Depending on land access and ground conditions, drill testing of the Semizova Ponikva and Rupice West coincident with surface gravity and geochemistry anomalies will be priority. Focus will then shift to drill testing the prospective historic Droskovac underground mine workings for Pb-Zn-Ag mineralisation extensions. Droskovac has known Pb-Zn-Ba mineralisation that has not been previously mined. An extensive ground gravity geophysical survey is scheduled across the Droskovac project in Q1 2023 prior to drill testing. The targets at Droskovac are Pb-Zn-Ag mineralisation left behind after mining, with potential for mineralisation connection to the Brezik open pit 500 meters to the east. In Q3 and Q4 2023 regional exploration will commence systematic mapping and sampling of the Vares East license for Pb, Zn, Ag, Cu, Au mineralisation across a terrain that can host a number of deposit styles.



Figure 5: Plan view map of Rupice 2023 drill program

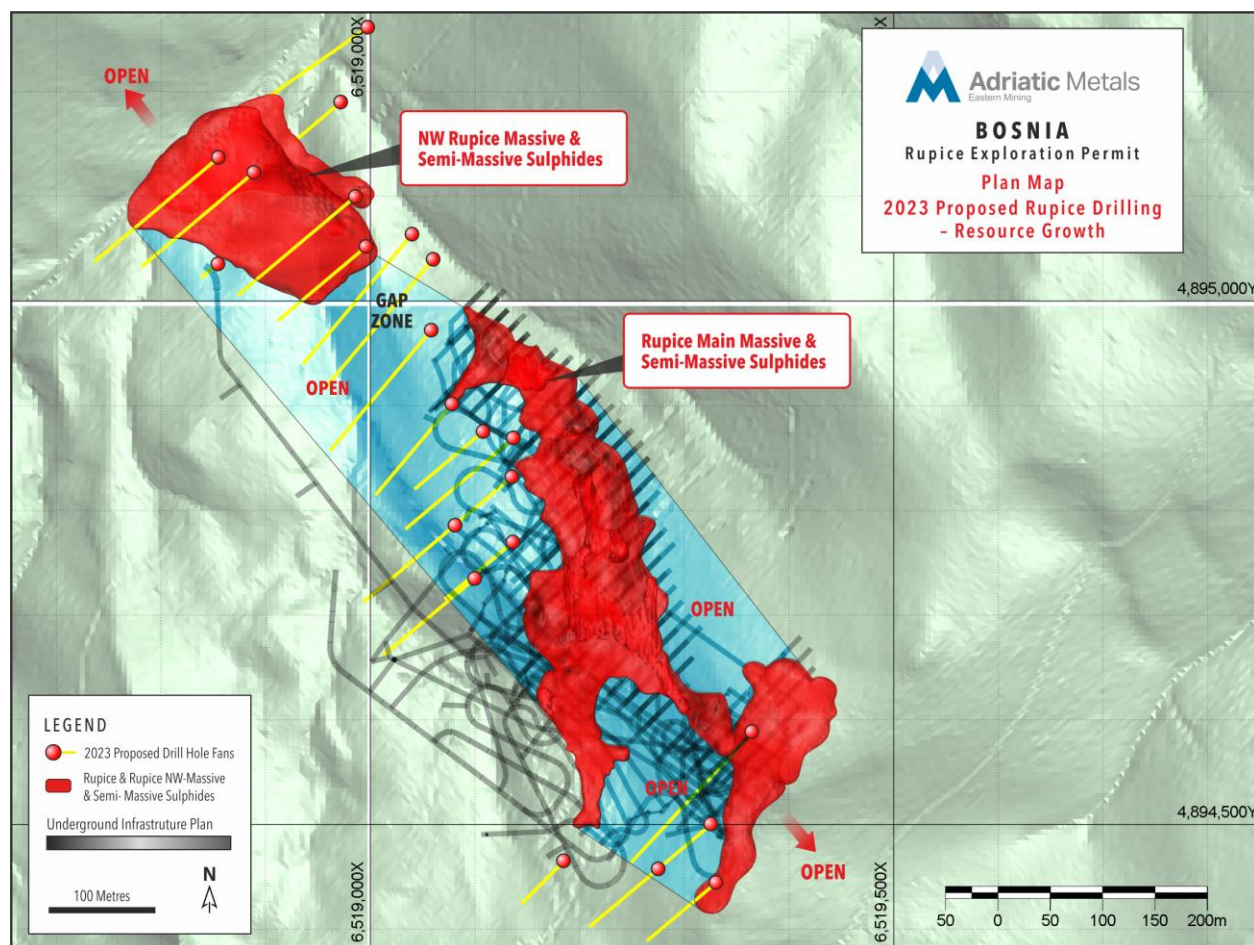

-ends-

MARKET ABUSE REGULATION DISCLOSURE

The information contained within this announcement is deemed by the Company (LEI: 549300OHAH2GL1DP0L61) to constitute inside information as stipulated under the Market Abuse Regulations (EU) No. 596/2014. The person responsible for arranging and authorising the release of this announcement on behalf of the Company is Paul Cronin, Managing Director and CEO.

Authorised by Paul Cronin, Managing Director & CEO

For further information please visit: www.adriaticmetals.com; email: info@adriaticmetals.com, [@AdriaticMetals](https://twitter.com/AdriaticMetals) on Twitter; or contact:

**Adriatic Metals PLC**

Paul Cronin / Klara Kaczmarek

Via Buchanan

Buchanan

Bobby Morse / Oonagh Reidy

Tel: +44 (0) 20 7466 5000

adriatic@buchanan.uk.com

Canaccord Genuity Limited (Joint Corporate Broker)

Jeremy Dunlop (Australia)

James Asensio (UK)

Tel: +61 2 9263 2700

Tel: +44 (0) 207 523 8000

RBC Capital Markets (Joint Corporate Broker)

James Agnew / Jamil Miah

Tel: +44 (0) 20 7653 4000

Stifel Nicolaus Europe Limited (Joint Corporate Broker)

Ashton Clanfield / Callum Stewart

Tel: +44 (0) 20 7710 7600

Citadel Magnus

Cameron Gilenko

Tel: +61 2 8234 0100

COMPETENT PERSONS REPORT

The information in this report which relates to exploration results is based on and fairly represents information and supporting documentation compiled by Mr Sergei Smolonogov, who is a member of the Australian Institute of Geoscientists (AIG). Mr Smolonogov is an employee of Adriatic Metals PLC and has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australian Code of Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Smolonogov consents to the inclusion in this report of the matters based on that information in the form and context in which it appears.

ABOUT ADRIATIC METALS

Adriatic Metals PLC (ASX:ADT, LSE:ADT1, OTCQX:ADMLF) is a precious and base metals developer that is advancing the world-class Vares Silver Project in Bosnia & Herzegovina, as well as the Raska Zinc-Silver Project in Serbia.

The Vares Silver Project is fully funded to production, which is expected in Q3 2023. The 2021 Project Definitive Feasibility Study shows robust economics of US\$1,062 million post-tax NPV8, 134% IRR and a capex of US\$168 million. Concurrent with ongoing construction activities, the Company continues to explore across its highly prospective 42km² concession package.

The Mineral Resource estimate for the Rupice underground deposit comprising part of the Vares Silver Project was announced in accordance with ASX Listing Rule 5.8 on 1 September 2020. The Company confirms that it is not aware of any new information or data that materially affects the information included in the previous announcement and that all material assumptions and technical parameters underpinning the estimate in the previous announcement continue to apply and have not materially changed.



The Ore Reserve estimate for the Rupice deposit comprising part of the Vares Silver Project was announced in accordance with ASX Listing Rule 5.9 on 19 August 2021. The Company confirms that it is not aware of any new information or data that materially affects the information included in the previous announcement and that all material assumptions and technical parameters underpinning the estimate in the previous announcement continue to apply and have not materially changed.

In accordance with ASX Listing Rule 5.19, the Company confirms that the production targets and forecast financial information for the Vares Project were first disclosed in accordance with ASX Listing Rules 5.16 and 5.17 in the Company's announcement dated 19 August 2021. The Company confirms that all the material assumptions underpinning the production target and the forecast financial information in the previous announcement continue to apply and have not materially changed.

DISCLAIMER

Forward-looking statements are statements that are not historical facts. Words such as "expect(s)", "feel(s)", "believe(s)", "will", "may", "anticipate(s)", "potential(s)" and similar expressions are intended to identify forward-looking statements. These statements include, but are not limited to statements regarding future production, resources or reserves and exploration results. All of such statements are subject to certain risks and uncertainties, many of which are difficult to predict and generally beyond the control of the Company, that could cause actual results to differ materially from those expressed in, or implied or projected by, the forward-looking information and statements. These risks and uncertainties include, but are not limited to: (i) those relating to the interpretation of drill results, the geology, grade and continuity of mineral deposits and conclusions of economic evaluations, (ii) risks relating to possible variations in reserves, grade, planned mining dilution and ore loss, or recovery rates and changes in project parameters as plans continue to be refined, (iii) the potential for delays in exploration or development activities or the completion of feasibility studies, (iv) risks related to commodity price and foreign exchange rate fluctuations, (v) risks related to failure to obtain adequate financing on a timely basis and on acceptable terms or delays in obtaining governmental approvals or in the completion of development or construction activities, and (vi) other risks and uncertainties related to the Company's prospects, properties and business strategy. Our audience is cautioned not to place undue reliance on these forward-looking statements that speak only as of the date hereof, and we do not undertake any obligation to revise and disseminate forward-looking statements to reflect events or circumstances after the date hereof, or to reflect the occurrence of or non-occurrence of any events.



APPENDIX 1- ASSAY TABLES

Table 1– Significant intercepts for reported drill holes

Hole ID	From	To	Interval	AgEq	ZnEq	Ag	Zn	Pb	Au	Cu	BaSO ₄	Sb
	(m)	(m)	(m)	(g/t)	(%)	(g/t)	(%)	(%)	(g/t)	(%)	(%)	(%)
BR-25-22	162.10	170.50	8.40	166.8	5.36	24.9	1.68	0.93	0.23	0.14	3.5	0.59
BR-25-22	256.80	300.00	43.20	671.6	21.60	148.2	7.14	5.82	0.85	0.60	49.5	0.26
<i>Including</i>	<i>281.40</i>	<i>287.40</i>	<i>6.00</i>	<i>1,432.8</i>	<i>46.07</i>	<i>252.7</i>	<i>17.15</i>	<i>16.15</i>	<i>1.96</i>	<i>1.46</i>	<i>35.2</i>	<i>0.76</i>
BR-26-22	148.20	163.00	14.80	545.0	17.53	191.2	4.08	2.45	0.95	0.40	50.0	0.30
BR-26-22	253.10	258.80	5.70	296.4	9.53	96.4	2.76	1.27	0.41	0.08	35.7	0.10
BR-26-22	266.00	287.10	21.10	527.5	16.96	231.5	4.95	2.47	0.62	0.17	38.2	0.03
BR-27-22	163.80	167.10	3.30	206.1	6.62	50.0	1.93	0.70	0.38	0.19	24.2	0.12
BR-27-22	263.80	305.00	41.20	409.2	13.16	93.0	3.65	2.10	1.14	0.33	36.8	0.09
BR-29-22	160.90	167.00	6.10	140.3	4.51	30.3	1.71	0.89	0.22	0.13	3.0	0.19
BR-29-22	237.00	255.40	18.40	166.7	5.36	91.5	1.72	0.34	0.00	0.00	10.2	0.13
BR-29-22	269.60	303.00	33.40	662.7	21.31	120.1	8.26	4.34	1.45	0.31	48.9	0.22
BR-30-22	211.80	246.30	34.50	987.5	31.75	183.1	14.88	8.11	1.12	0.94	36.6	0.18
<i>Including</i>	<i>226.00</i>	<i>237.80</i>	<i>11.80</i>	<i>1,669.4</i>	<i>53.68</i>	<i>229.4</i>	<i>26.11</i>	<i>15.44</i>	<i>1.53</i>	<i>1.90</i>	<i>32.0</i>	<i>0.27</i>
BR-32-22	170.20	179.60	9.40	870.9	28.00	213.4	7.11	3.51	1.78	0.30	42.6	2.40
BR-32-22	223.00	226.00	3.00	654.4	21.04	424.6	3.65	5.15	0.10	0.53	1.2	0.08
BR-32-22	238.00	244.00	6.00	759.3	24.41	591.0	4.16	2.42	0.00	0.03	30.1	0.04
BR-32-22	260.00	273.60	13.60	192.2	6.18	79.6	1.61	0.91	0.19	0.04	20.0	0.05
BR-32-22	277.00	299.00	23.00	577.5	18.57	181.0	6.46	3.13	0.90	0.22	45.8	0.06

Notes

- Significant intervals are estimated using a 50g/t AgEq cut off, 2m minimum interval and 5 metres consecutive internal dilution. Higher grade intervals have a 600g/t AgEq cut off.
- AgEq & ZnEq grades are based on the following metal prices used in the Rupice MRE: \$2000/oz gold, \$25/oz silver, \$2500/t zinc, \$2000/t lead, \$6500/t copper, \$150/t BaSO₄ & \$6500/t antimony.
- 90% metal recovery, as per the Rupice MRE, has been applied for all metals.
- 100% payability was assumed for all metals.
- The silver equivalent calculation is as follows: AgEq = (Au grade g/t * 72.000) + (Ag grade g/t * 0.900) + (Pb grade % * 22.395) + (Zn grade % * 27.993) + (Cu grade % * 72.782) + (BaSO₄ grade % * 1.680) + (Sb grade % * 72.782).
- The zinc equivalent calculation is as follows: ZnEq = AgEq / 31.1.
- It is the opinion of Adriatic Metals that all elements and products included in the metal equivalent formula have a reasonable potential to be recovered and sold.
- Preliminary BaSO₄ results are reported for holes BR-26, 27, 29, 30-22 using a 50% BaO upper detection limit. All other assay results are final. Preliminary BaSO₄ results have been used in AgEq and ZnEq calculations. Awaiting final XRF values for samples having >50% reported BaO.

Table 2 – Collar information for reported drill holes

Hole ID	Easting (m) ¹	Northing (m) ¹	Elevation (m)	Depth (m)	Azimuth	Inclination
BR-24-22 ²	6518971	4895196	1009	33.50	226	-57.1
BR-25-22	6518971	4895189	1008	327.10	230	-57.5
BR-26-22	6519033	4895134	1023	320.80	236	-70.9
BR-27-22	6518972	4895189	1008	329.80	230	-62.5
BR-28-22	6519033	4895134	1023	320.80	236	-77.5
BR-29-22	6518972	4895189	1007	330.00	228	-66.4
BR-30-22	6518889	4895123	1017	287.70	226	-75.8
BR-31-22 ²	6518971	4895189	1008	68.80	230	-71.2
BR-32-22	6518971	4895189	1008	343.50	226	-73.5

Notes

- Coordinates are shown using Gauss Kruger MGI Balkan Zone 6
- Abandoned drill hole



Table 3 – Assay data for reported drill holes

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-24-22	0.00	33.50	33.50	Interval not sampled						
BR-25-22	0.00	109.90	109.90	Interval not sampled						
BR-25-22	109.90	111.00	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	111.00	112.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	112.00	113.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	113.10	114.10	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	114.10	115.30	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	115.30	116.40	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	116.40	117.20	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	117.20	118.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	118.40	119.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	119.60	120.60	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	120.60	121.60	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	121.60	122.60	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	122.60	123.50	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	123.50	124.60	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	124.60	125.60	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	125.60	126.70	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	126.70	127.80	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	127.80	128.60	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	128.60	129.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	129.80	131.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	131.00	132.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	132.10	133.30	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	133.30	134.30	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	134.30	135.30	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	135.30	136.50	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	136.50	137.60	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	137.60	138.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	138.80	140.00	1.20	<1.0	<0.01	<0.01	0.07	<0.01	<1.0	<0.01
BR-25-22	140.00	142.80	2.80	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-25-22	142.80	143.80	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	143.80	146.60	2.80	<1.0	0.02	0.03	<0.01	<0.01	<1.0	<0.01
BR-25-22	146.60	147.80	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	147.80	148.90	1.10	<1.0	<0.01	0.04	<0.01	<0.01	<1.0	0.01
BR-25-22	148.90	150.80	1.90	<1.0	<0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-25-22	150.80	152.00	1.20	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	0.01
BR-25-22	152.00	153.20	1.20	<1.0	0.01	0.02	<0.01	<0.01	<1.0	0.01
BR-25-22	153.20	155.10	1.90	<1.0	0.01	0.03	<0.01	<0.01	<1.0	0.01
BR-25-22	155.10	156.10	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	0.02
BR-25-22	156.10	157.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.03
BR-25-22	157.00	158.20	1.20	<1.0	0.01	0.01	<0.01	<0.01	<1.0	0.02
BR-25-22	158.20	159.10	0.90	<1.0	<0.01	0.02	<0.01	<0.01	<1.0	0.01
BR-25-22	159.10	160.30	1.20	<1.0	0.01	0.13	<0.01	0.01	<1.0	0.02
BR-25-22	160.30	161.30	1.00	<1.0	<0.01	0.03	<0.01	0.01	<1.0	0.04
BR-25-22	161.30	162.10	0.80	5.0	0.19	0.19	0.03	0.02	<1.0	0.09
BR-25-22	162.10	163.10	1.00	15.0	1.11	0.30	0.20	0.03	<1.0	0.02
BR-25-22	163.10	163.80	0.70	16.0	0.41	0.20	0.37	0.07	<1.0	0.09
BR-25-22	163.80	164.50	0.70	6.0	0.15	0.13	0.20	0.18	1.0	0.27
BR-25-22	164.50	165.60	1.10	37.0	2.22	1.64	0.22	0.49	<1.0	2.93
BR-25-22	165.60	166.50	0.90	34.0	2.01	1.12	0.27	0.12	2.2	0.31
BR-25-22	166.50	167.50	1.00	19.0	3.09	1.40	0.39	0.08	<1.0	0.49
BR-25-22	167.50	168.30	0.80	74.0	3.79	3.01	0.29	0.22	4.5	0.41
BR-25-22	168.30	169.40	1.10	10.0	0.66	0.21	0.06	0.02	10.8	0.14
BR-25-22	169.40	170.50	1.10	17.0	1.41	0.42	0.15	0.02	8.0	0.18



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-25-22	170.50	171.70	1.20	3.0	0.09	0.10	0.02	<0.01	<1.0	0.02
BR-25-22	171.70	172.60	0.90	<1.0	0.05	0.03	0.03	<0.01	<1.0	<0.01
BR-25-22	172.60	173.30	0.70	<1.0	0.05	0.04	0.02	<0.01	<1.0	<0.01
BR-25-22	173.30	174.30	1.00	<1.0	0.01	0.00	0.01	<0.01	<1.0	<0.01
BR-25-22	174.30	175.50	1.20	<1.0	0.03	0.06	0.01	<0.01	<1.0	<0.01
BR-25-22	175.50	176.70	1.20	<1.0	0.01	0.06	<0.01	<0.01	<1.0	<0.01
BR-25-22	176.70	177.50	0.80	<1.0	0.01	0.01	<0.01	<0.01	<1.0	0.02
BR-25-22	177.50	178.70	1.20	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	178.70	179.60	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	179.60	180.80	1.20	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	180.80	182.00	1.20	<1.0	0.04	0.05	<0.01	<0.01	<1.0	<0.01
BR-25-22	182.00	183.00	1.00	<1.0	0.01	0.03	<0.01	<0.01	<1.0	<0.01
BR-25-22	183.00	184.00	1.00	<1.0	<0.01	0.08	<0.01	<0.01	<1.0	<0.01
BR-25-22	184.00	185.00	1.00	<1.0	<0.01	0.10	<0.01	<0.01	<1.0	<0.01
BR-25-22	185.00	186.20	1.20	<1.0	<0.01	0.11	<0.01	<0.01	<1.0	<0.01
BR-25-22	186.20	187.40	1.20	<1.0	<0.01	0.11	<0.01	<0.01	<1.0	<0.01
BR-25-22	187.40	188.60	1.20	<1.0	0.02	0.11	<0.01	<0.01	<1.0	0.02
BR-25-22	188.60	189.40	0.80	<1.0	0.09	<0.01	<0.01	<0.01	<1.0	0.05
BR-25-22	189.40	190.50	1.10	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-25-22	190.50	191.30	0.80	<1.0	0.04	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	191.30	192.30	1.00	<1.0	0.06	0.01	<0.01	<0.01	<1.0	0.01
BR-25-22	192.30	193.30	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-25-22	193.30	194.20	0.90	<1.0	0.06	0.01	<0.01	<0.01	<1.0	0.01
BR-25-22	194.20	195.40	1.20	<1.0	0.13	0.09	<0.01	<0.01	<1.0	0.01
BR-25-22	195.40	196.50	1.10	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	196.50	197.50	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	197.50	198.60	1.10	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	198.60	199.80	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	199.80	201.00	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	201.00	202.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	202.00	203.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	203.00	204.00	1.00	12.0	0.08	0.05	<0.01	<0.01	<1.0	<0.01
BR-25-22	204.00	205.20	1.20	11.0	<0.01	<0.01	<0.01	<0.01	1.0	<0.01
BR-25-22	205.20	206.20	1.00	4.0	0.01	0.02	<0.01	<0.01	4.4	<0.01
BR-25-22	206.20	207.00	0.80	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	207.00	208.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	208.00	209.00	1.00	<1.0	0.05	0.01	0.02	<0.01	1.1	<0.01
BR-25-22	209.00	210.00	1.00	<1.0	0.07	0.01	0.34	<0.01	<1.0	<0.01
BR-25-22	210.00	211.00	1.00	4.0	0.30	0.15	0.06	0.02	<1.0	0.01
BR-25-22	211.00	212.00	1.00	<1.0	0.02	0.01	0.05	<0.01	<1.0	<0.01
BR-25-22	212.00	212.80	0.80	3.0	0.12	0.03	0.06	0.01	1.0	0.01
BR-25-22	212.80	214.00	1.20	3.0	0.05	0.02	0.05	<0.01	<1.0	<0.01
BR-25-22	214.00	215.00	1.00	11.0	0.10	0.04	<0.01	<0.01	<1.0	<0.01
BR-25-22	215.00	216.00	1.00	5.0	0.04	0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	216.00	216.50	0.50	21.0	0.88	0.20	<0.01	<0.01	<1.0	<0.01
BR-25-22	216.50	217.50	1.00	<1.0	<0.01	<0.01	<0.01	0.01	<1.0	0.01
BR-25-22	217.50	219.00	1.50	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-25-22	219.00	220.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-25-22	220.00	221.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-25-22	221.10	222.20	1.10	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	0.01
BR-25-22	222.20	223.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-25-22	223.40	224.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-25-22	224.60	225.70	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-25-22	225.70	226.50	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	226.50	227.50	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	227.50	228.50	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-25-22	228.50	229.60	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	229.60	230.60	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	230.60	231.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-25-22	231.80	233.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	233.00	234.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	234.00	234.80	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	234.80	236.00	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	236.00	237.00	1.00	110.0	0.01	<0.01	<0.01	0.02	<1.0	<0.01
BR-25-22	237.00	238.00	1.00	4.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	238.00	239.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	239.00	240.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	240.00	241.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	241.20	242.30	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	242.30	243.30	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	243.30	244.00	0.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	244.00	244.90	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	244.90	246.10	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	246.10	247.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	247.00	248.10	1.10	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-25-22	248.10	249.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	249.00	250.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	250.00	250.80	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	250.80	251.80	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	12.1	<0.01
BR-25-22	251.80	253.00	1.20	<1.0	0.05	0.02	0.02	0.01	17.7	<0.01
BR-25-22	253.00	254.00	1.00	15.0	0.01	0.16	0.68	0.01	83.0	<0.01
BR-25-22	254.00	255.00	1.00	5.0	<0.01	0.04	0.77	<0.01	97.3	<0.01
BR-25-22	255.00	256.00	1.00	42.0	0.01	0.23	0.21	0.03	94.6	0.01
BR-25-22	256.00	256.80	0.80	39.0	<0.01	0.02	0.33	<0.01	97.5	<0.01
BR-25-22	256.80	258.00	1.20	787.0	2.67	3.45	0.92	0.34	83.0	0.10
BR-25-22	258.00	259.10	1.10	264.0	7.77	4.38	1.34	0.14	76.1	0.09
BR-25-22	259.10	260.00	0.90	385.0	2.40	1.80	1.07	0.25	83.5	0.12
BR-25-22	260.00	261.00	1.00	347.0	1.97	0.50	0.88	0.17	92.3	0.10
BR-25-22	261.00	261.80	0.80	175.0	9.14	3.41	2.24	0.15	76.8	0.13
BR-25-22	261.80	263.00	1.20	163.0	10.34	3.16	1.63	0.13	71.3	0.10
BR-25-22	263.00	264.00	1.00	110.0	10.09	3.47	1.20	0.12	76.3	0.10
BR-25-22	264.00	265.00	1.00	87.0	10.55	3.62	1.13	0.14	74.8	0.10
BR-25-22	265.00	266.00	1.00	95.0	9.68	3.72	1.06	0.14	75.2	0.13
BR-25-22	266.00	267.00	1.00	89.0	8.76	3.69	0.95	0.14	71.9	0.12
BR-25-22	267.00	268.00	1.00	67.0	9.01	3.53	0.63	0.11	77.6	0.07
BR-25-22	268.00	269.00	1.00	60.0	9.50	4.38	0.53	0.12	73.2	0.07
BR-25-22	269.00	270.00	1.00	63.0	10.86	3.91	0.62	0.15	73.2	0.08
BR-25-22	270.00	271.00	1.00	75.0	9.58	4.32	0.67	0.21	73.6	0.09
BR-25-22	271.00	272.00	1.00	57.0	9.59	4.18	0.94	0.16	74.8	0.10
BR-25-22	272.00	273.00	1.00	48.0	11.12	4.09	0.46	0.14	75.0	0.08
BR-25-22	273.00	274.00	1.00	39.0	10.78	4.53	1.14	0.18	73.6	0.09
BR-25-22	274.00	275.00	1.00	52.0	3.36	2.99	0.92	1.02	83.0	0.22
BR-25-22	275.00	276.10	1.10	75.0	5.95	5.35	0.45	0.28	77.4	0.07
BR-25-22	276.10	277.10	1.00	141.0	3.10	7.21	0.32	0.52	76.5	0.31
BR-25-22	277.10	278.20	1.10	123.0	4.21	4.83	0.62	0.50	79.2	0.26
BR-25-22	278.20	279.40	1.20	77.0	6.01	7.67	0.34	0.43	73.1	0.24
BR-25-22	279.40	280.40	1.00	112.0	2.23	11.78	0.45	0.73	66.5	0.35
BR-25-22	280.40	281.40	1.00	61.0	1.75	13.39	0.33	0.83	73.9	0.30
BR-25-22	281.40	282.60	1.20	118.0	14.34	16.26	1.35	1.38	35.7	0.57
BR-25-22	282.60	283.60	1.00	201.0	14.40	15.94	1.53	1.53	38.7	0.70
BR-25-22	283.60	284.60	1.00	253.0	20.28	19.55	2.11	1.37	28.5	0.62
BR-25-22	284.60	285.60	1.00	125.0	14.81	9.58	1.35	0.71	53.3	0.39



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-25-22	285.60	286.60	1.00	462.0	22.12	21.35	3.14	2.38	19.0	1.82
BR-25-22	286.60	287.40	0.80	417.0	17.60	13.78	2.58	1.43	35.8	0.44
BR-25-22	287.40	288.50	1.10	105.0	2.69	3.98	0.31	0.76	11.3	0.30
BR-25-22	288.50	289.60	1.10	169.0	4.23	2.49	0.49	1.40	4.9	0.46
BR-25-22	289.60	290.60	1.00	193.0	3.81	4.33	0.58	2.76	5.4	0.83
BR-25-22	290.60	291.40	0.80	90.0	1.02	1.60	0.29	0.65	<1.0	0.20
BR-25-22	291.40	292.40	1.00	388.0	4.74	19.3	0.82	3.03	2.3	0.84
BR-25-22	292.40	293.60	1.20	43.0	1.23	1.33	0.42	0.28	8.8	0.18
BR-25-22	293.60	294.60	1.00	24.0	4.93	1.51	0.37	0.17	5.1	0.08
BR-25-22	294.60	295.40	0.80	22.0	1.30	0.37	0.14	0.04	6.7	0.02
BR-25-22	295.40	296.60	1.20	8.0	0.24	0.27	0.06	0.01	2.9	<0.01
BR-25-22	296.60	297.70	1.10	5.0	0.30	0.15	0.05	0.01	<1.0	0.01
BR-25-22	297.70	298.80	1.10	61.0	4.60	1.35	0.10	0.29	<1.0	0.15
BR-25-22	298.80	300.00	1.20	24.0	1.10	0.50	0.08	0.16	<1.0	0.05
BR-25-22	300.00	301.20	1.20	5.0	1.13	0.34	0.08	<0.01	1.5	<0.01
BR-25-22	301.20	302.20	1.00	<1.0	0.03	0.00	0.07	<0.01	<1.0	<0.01
BR-25-22	302.20	303.00	0.80	<1.0	0.70	0.10	0.05	<0.01	3.1	<0.01
BR-25-22	303.00	304.00	1.00	<1.0	0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-25-22	304.00	305.00	1.00	<1.0	0.33	0.04	0.05	<0.01	1.1	<0.01
BR-25-22	305.00	306.00	1.00	<1.0	0.35	0.03	0.07	<0.01	<1.0	<0.01
BR-25-22	306.00	307.20	1.20	7.0	0.80	0.55	0.05	0.03	4.1	0.11
BR-25-22	307.20	308.00	0.80	3.0	0.72	0.13	0.07	0.03	1.1	0.02
BR-25-22	308.00	309.00	1.00	<1.0	0.30	0.01	0.03	<0.01	<1.0	0.01
BR-25-22	309.00	310.00	1.00	<1.0	0.06	<0.01	0.01	<0.01	<1.0	0.01
BR-25-22	310.00	311.00	1.00	<1.0	0.09	<0.01	0.02	<0.01	<1.0	0.01
BR-25-22	311.00	312.00	1.00	<1.0	0.29	<0.01	0.02	<0.01	<1.0	<0.01
BR-25-22	312.00	313.00	1.00	<1.0	0.86	0.16	0.01	0.03	2.3	0.02
BR-25-22	313.00	314.00	1.00	<1.0	0.13	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	314.00	315.00	1.00	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	315.00	316.00	1.00	<1.0	0.06	<0.01	<0.01	<0.01	<1.0	<0.01
BR-25-22	316.00	317.00	1.00	<1.0	0.27	0.04	0.05	0.01	<1.0	0.01
BR-25-22	317.00	318.20	1.20	<1.0	0.10	<0.01	0.01	<0.01	<1.0	<0.01
BR-25-22	318.20	319.00	0.80	<1.0	0.06	0.01	<0.01	<0.01	<1.0	0.01
BR-25-22	319.00	320.00	1.00	5.0	0.18	0.04	0.03	0.01	<1.0	<0.01
BR-25-22	320.00	321.00	1.00	6.0	0.35	0.05	0.03	0.01	1.1	<0.01
BR-25-22	321.00	322.90	1.90	8.0	0.07	0.04	0.03	<0.01	<1.0	<0.01
BR-25-22	322.90	323.90	1.00	16.0	0.13	0.05	0.03	0.01	<1.0	<0.01
BR-25-22	323.90	324.30	0.40	5.0	0.38	0.02	0.04	<0.01	1.6	<0.01
BR-25-22	324.30	327.10	2.80	6.0	0.16	<0.01	0.04	<0.01	<1.0	<0.01
BR-26-22	0.00	106.00	106.00	Interval not sampled						
BR-26-22	106.00	107.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	107.00	108.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	108.00	109.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	109.00	109.80	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	109.80	111.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	111.00	112.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	112.00	113.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	113.20	114.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	114.40	115.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	115.60	116.80	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	116.80	118.00	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	118.00	119.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	119.00	120.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	120.00	121.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	121.00	122.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results > 50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-26-22	122.00	123.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	123.00	124.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	124.00	124.90	0.90	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	124.90	125.90	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	125.90	127.00	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	127.00	128.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	128.20	129.00	0.80	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	129.00	130.20	1.20	<1.0	0.03	0.07	<0.01	0.01	<1.0	0.01
BR-26-22	130.20	131.10	0.90	<1.0	0.06	0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	131.10	131.90	0.80	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	131.90	133.00	1.10	2.0	0.03	0.11	<0.01	<0.01	<1.0	<0.01
BR-26-22	133.00	134.20	1.20	2.0	0.07	0.44	<0.01	0.01	<1.0	0.02
BR-26-22	134.20	135.10	0.90	<1.0	0.02	0.04	0.01	0.01	<1.0	0.02
BR-26-22	135.10	136.50	1.40	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-26-22	136.50	137.40	0.90	<1.0	0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-26-22	137.40	138.30	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	138.30	139.60	1.30	<1.0	0.03	<0.01	0.04	<0.01	<1.0	<0.01
BR-26-22	139.60	140.80	1.20	<1.0	0.05	0.02	0.03	<0.01	<1.0	<0.01
BR-26-22	140.80	142.00	1.20	3.0	0.19	0.06	0.11	<0.01	1.3	<0.01
BR-26-22	142.00	143.80	1.80	<1.0	0.03	0.01	0.03	<0.01	1.0	<0.01
BR-26-22	143.80	144.60	0.80	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	144.60	148.20	3.60	3.0	0.02	0.12	0.05	0.01	<1.0	0.02
BR-26-22	148.20	149.00	0.80	491.0	6.85	4.10	2.31	0.30	>50.0	0.31
BR-26-22	149.00	150.00	1.00	494.0	13.26	5.45	2.32	0.44	>50.0	0.82
BR-26-22	150.00	151.00	1.00	343.0	13.41	4.56	2.04	0.25	>50.0	0.54
BR-26-22	151.00	152.00	1.00	311.0	10.12	2.89	1.01	0.23	>50.0	0.35
BR-26-22	152.00	153.00	1.00	219.0	6.34	3.47	0.96	0.42	>50.0	0.22
BR-26-22	153.00	154.00	1.00	143.0	2.97	1.42	0.69	0.42	>50.0	0.19
BR-26-22	154.00	154.80	0.80	105.0	1.98	0.86	0.64	0.30	>50.0	0.24
BR-26-22	154.80	155.80	1.00	159.0	1.78	1.52	0.98	0.25	>50.0	0.25
BR-26-22	155.80	156.50	0.70	185.0	2.13	3.46	0.55	0.36	>50.0	0.20
BR-26-22	156.50	157.00	0.50	141.0	0.74	3.59	0.57	0.38	>50.0	0.37
BR-26-22	157.00	158.20	1.20	171.0	1.45	3.84	0.31	0.42	>50.0	0.33
BR-26-22	158.20	159.20	1.00	127.0	0.63	1.54	0.76	0.28	>50.0	0.09
BR-26-22	159.20	160.20	1.00	38.0	0.23	0.61	1.00	0.71	>50.0	0.15
BR-26-22	160.20	161.00	0.80	33.0	0.19	0.47	0.36	0.93	>50.0	0.33
BR-26-22	161.00	161.80	0.80	36.0	0.23	0.63	0.30	0.51	>50.0	0.17
BR-26-22	161.80	163.00	1.20	49.0	0.52	0.93	0.34	0.25	>50.0	0.20
BR-26-22	163.00	164.00	1.00	4.0	0.14	0.07	0.06	0.02	1.1	0.02
BR-26-22	164.00	165.00	1.00	<1.0	<0.01	<0.01	0.09	0.02	<1.0	0.01
BR-26-22	165.00	166.00	1.00	<1.0	0.01	<0.01	0.03	<0.01	2.0	<0.01
BR-26-22	166.00	167.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-26-22	167.00	168.00	1.00	<1.0	0.03	<0.01	0.05	0.13	>50.0	0.04
BR-26-22	168.00	169.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	169.00	169.80	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	169.80	171.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-26-22	171.00	172.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	172.00	173.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	173.00	174.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	174.10	175.00	0.90	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-26-22	175.00	176.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	176.00	177.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	177.00	178.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	178.00	179.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	179.00	179.80	0.80	<1.0	0.03	0.01	<0.01	<0.01	<1.0	<0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-26-22	179.80	180.20	0.40	<1.0	0.15	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	180.20	181.00	0.80	<1.0	0.05	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	181.00	182.00	1.00	3.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	182.00	183.00	1.00	6.0	0.06	0.02	<0.01	<0.01	<1.0	<0.01
BR-26-22	183.00	184.00	1.00	4.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	184.00	185.00	1.00	4.0	0.04	0.02	<0.01	<0.01	<1.0	<0.01
BR-26-22	185.00	186.00	1.00	19.0	0.47	0.07	<0.01	<0.01	<1.0	<0.01
BR-26-22	186.00	187.00	1.00	3.0	0.09	0.02	<0.01	<0.01	<1.0	<0.01
BR-26-22	187.00	188.00	1.00	53.0	0.12	0.22	<0.01	0.04	<1.0	0.05
BR-26-22	188.00	189.00	1.00	6.0	0.11	0.04	<0.01	<0.01	<1.0	0.01
BR-26-22	189.00	190.00	1.00	4.0	0.03	0.03	<0.01	<0.01	<1.0	<0.01
BR-26-22	190.00	191.00	1.00	2.0	0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-26-22	191.00	192.00	1.00	<1.0	0.06	0.02	0.02	<0.01	<1.0	<0.01
BR-26-22	192.00	193.00	1.00	4.0	0.10	0.06	0.08	<0.01	<1.0	<0.01
BR-26-22	193.00	194.00	1.00	3.0	0.02	0.02	0.05	<0.01	<1.0	0.01
BR-26-22	194.00	195.00	1.00	<1.0	0.04	0.01	0.02	<0.01	<1.0	<0.01
BR-26-22	195.00	196.00	1.00	<1.0	0.10	0.03	0.05	<0.01	<1.0	<0.01
BR-26-22	196.00	197.00	1.00	2.0	0.11	0.01	0.05	<0.01	<1.0	<0.01
BR-26-22	197.00	198.00	1.00	<1.0	0.07	0.01	0.03	<0.01	<1.0	<0.01
BR-26-22	198.00	199.00	1.00	<1.0	0.09	0.01	0.02	<0.01	<1.0	<0.01
BR-26-22	199.00	200.00	1.00	<1.0	0.07	0.01	0.04	<0.01	<1.0	<0.01
BR-26-22	200.00	201.00	1.00	<1.0	0.03	<0.01	0.05	<0.01	<1.0	<0.01
BR-26-22	201.00	202.00	1.00	<1.0	0.10	0.01	0.06	<0.01	<1.0	<0.01
BR-26-22	202.00	203.00	1.00	2.0	0.05	0.01	0.03	<0.01	1.3	<0.01
BR-26-22	203.00	204.00	1.00	<1.0	0.03	0.01	0.08	<0.01	<1.0	<0.01
BR-26-22	204.00	205.00	1.00	13.0	0.09	0.03	0.04	0.01	<1.0	0.01
BR-26-22	205.00	206.00	1.00	<1.0	0.16	<0.01	0.02	<0.01	<1.0	<0.01
BR-26-22	206.00	207.00	1.00	4.0	0.05	<0.01	0.03	0.01	<1.0	<0.01
BR-26-22	207.00	208.00	1.00	336.0	0.62	0.29	0.04	0.82	1.1	0.15
BR-26-22	208.00	209.00	1.00	6.0	0.08	0.05	0.03	<0.01	<1.0	<0.01
BR-26-22	209.00	210.00	1.00	<1.0	0.02	0.02	0.03	<0.01	<1.0	<0.01
BR-26-22	210.00	211.00	1.00	2.0	0.05	<0.01	0.02	<0.01	<1.0	<0.01
BR-26-22	211.00	212.00	1.00	<1.0	0.06	<0.01	0.02	<0.01	<1.0	<0.01
BR-26-22	212.00	213.00	1.00	<1.0	0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-26-22	213.00	214.00	1.00	2.0	0.09	0.01	0.03	<0.01	<1.0	<0.01
BR-26-22	214.00	215.00	1.00	<1.0	0.01	0.02	0.01	<0.01	<1.0	<0.01
BR-26-22	215.00	216.00	1.00	2.0	0.01	0.01	0.03	<0.01	<1.0	<0.01
BR-26-22	216.00	217.00	1.00	305.0	0.46	0.15	0.06	0.19	1.4	0.06
BR-26-22	217.00	218.00	1.00	3.0	0.05	0.01	0.04	<0.01	<1.0	<0.01
BR-26-22	218.00	219.00	1.00	5.0	0.21	0.03	0.03	<0.01	<1.0	<0.01
BR-26-22	219.00	220.00	1.00	2.0	0.03	0.02	0.05	<0.01	<1.0	<0.01
BR-26-22	220.00	221.00	1.00	14.0	0.11	0.04	0.05	<0.01	<1.0	0.01
BR-26-22	221.00	222.00	1.00	5.0	0.08	<0.01	0.05	<0.01	<1.0	<0.01
BR-26-22	222.00	223.00	1.00	2.0	0.03	<0.01	0.01	<0.01	1.1	0.01
BR-26-22	223.00	224.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	0.01
BR-26-22	224.00	224.80	0.80	<1.0	0.03	0.04	<0.01	<0.01	<1.0	0.01
BR-26-22	224.80	226.00	1.20	<1.0	0.07	0.04	<0.01	<0.01	3.0	0.01
BR-26-22	226.00	227.00	1.00	<1.0	0.02	0.01	<0.01	<0.01	<1.0	0.02
BR-26-22	227.00	228.20	1.20	6.0	0.23	0.12	<0.01	<0.01	3.4	0.06
BR-26-22	228.20	229.00	0.80	<1.0	0.07	0.18	0.02	<0.01	1.9	0.04
BR-26-22	229.00	230.00	1.00	<1.0	0.66	0.23	0.05	0.01	>50.0	0.15
BR-26-22	230.00	230.60	0.60	23.0	2.16	0.15	<0.01	<0.01	>50.0	6.17
BR-26-22	230.60	231.80	1.20	14.0	2.29	0.21	<0.01	<0.01	5.5	0.30
BR-26-22	231.80	232.80	1.00	<1.0	<0.01	0.02	<0.01	0.01	<1.0	0.05
BR-26-22	232.80	233.80	1.00	<1.0	1.59	0.13	<0.01	0.01	8.3	0.06

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results > 50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-26-22	233.80	234.60	0.80	<1.0	0.14	0.02	<0.01	<0.01	<1.0	0.21
BR-26-22	234.60	235.80	1.20	21.0	0.91	0.18	0.01	0.01	>50.0	0.05
BR-26-22	235.80	236.80	1.00	2.0	0.08	0.03	<0.01	<0.01	<1.0	0.02
BR-26-22	236.80	238.00	1.20	<1.0	0.03	0.04	<0.01	<0.01	<1.0	0.01
BR-26-22	238.00	239.00	1.00	3.0	<0.01	0.02	<0.01	<0.01	<1.0	0.01
BR-26-22	239.00	240.00	1.00	<1.0	0.01	0.03	<0.01	<0.01	1.0	0.01
BR-26-22	240.00	240.70	0.70	2.0	<0.01	0.10	<0.01	<0.01	<1.0	0.02
BR-26-22	240.70	241.70	1.00	<1.0	0.02	0.04	<0.01	<0.01	<1.0	0.01
BR-26-22	241.70	242.80	1.10	<1.0	0.03	0.04	<0.01	<0.01	<1.0	0.01
BR-26-22	242.80	244.00	1.20	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	0.01
BR-26-22	244.00	245.00	1.00	<1.0	0.04	<0.01	<0.01	<0.01	1.3	0.01
BR-26-22	245.00	246.00	1.00	<1.0	0.03	<0.01	<0.01	<0.01	1.1	0.01
BR-26-22	246.00	247.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	247.00	248.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	0.01
BR-26-22	248.00	249.00	1.00	<1.0	0.02	0.01	<0.01	<0.01	<1.0	0.01
BR-26-22	249.00	250.00	1.00	22.0	0.04	<0.01	<0.01	<0.01	1.2	0.01
BR-26-22	250.00	251.00	1.00	4.0	0.02	<0.01	<0.01	<0.01	<1.0	0.01
BR-26-22	251.00	252.00	1.00	7.0	0.11	0.10	<0.01	0.01	<1.0	0.02
BR-26-22	252.00	253.10	1.10	<1.0	0.24	0.07	<0.01	<0.01	<1.0	0.01
BR-26-22	253.10	254.30	1.20	3.0	0.98	0.63	0.51	0.07	>50.0	0.11
BR-26-22	254.30	255.00	0.70	16.0	0.55	0.31	0.07	0.01	6.4	0.02
BR-26-22	255.00	256.10	1.10	2.0	0.61	0.16	0.07	0.01	3.6	0.02
BR-26-22	256.10	257.00	0.90	201.0	5.62	2.70	0.75	0.16	>50.0	0.19
BR-26-22	257.00	258.00	1.00	298.0	7.20	3.11	0.68	0.18	>50.0	0.21
BR-26-22	258.00	258.80	0.80	67.0	1.55	0.72	0.36	0.04	>50.0	0.01
BR-26-22	258.80	260.00	1.20	<1.0	0.28	0.06	0.06	<0.01	1.2	0.01
BR-26-22	260.00	261.00	1.00	<1.0	0.38	0.08	0.03	0.01	<1.0	0.02
BR-26-22	261.00	262.00	1.00	<1.0	0.05	0.05	<0.01	<0.01	<1.0	0.03
BR-26-22	262.00	263.00	1.00	<1.0	0.04	0.02	0.02	<0.01	<1.0	0.01
BR-26-22	263.00	264.00	1.00	<1.0	0.01	0.02	0.03	0.01	<1.0	<0.01
BR-26-22	264.00	265.10	1.10	<1.0	0.02	0.03	0.02	0.01	<1.0	0.01
BR-26-22	265.10	266.00	0.90	13.0	0.13	0.71	0.52	<0.01	>50.0	<0.01
BR-26-22	266.00	266.60	0.60	31.0	0.04	0.54	0.34	<0.01	>50.0	<0.01
BR-26-22	266.60	267.00	0.40	137.0	1.88	0.85	0.33	0.05	>50.0	0.01
BR-26-22	267.00	268.00	1.00	442.0	7.30	2.89	0.72	0.14	>50.0	0.08
BR-26-22	268.00	269.00	1.00	347.0	4.77	1.94	0.57	0.16	>50.0	0.01
BR-26-22	269.00	270.00	1.00	298.0	7.09	3.02	0.65	0.18	>50.0	0.05
BR-26-22	270.00	271.00	1.00	193.0	3.94	1.95	0.37	0.10	>50.0	<0.01
BR-26-22	271.00	272.00	1.00	282.0	1.42	2.91	0.36	0.15	>50.0	<0.01
BR-26-22	272.00	273.00	1.00	661.0	3.70	3.77	0.52	0.23	>50.0	0.01
BR-26-22	273.00	274.00	1.00	307.0	4.68	2.72	0.51	0.17	>50.0	0.01
BR-26-22	274.00	275.00	1.00	289.0	3.31	2.95	0.51	0.15	>50.0	<0.01
BR-26-22	275.00	276.00	1.00	233.0	2.67	3.83	0.7	0.15	>50.0	0.01
BR-26-22	276.00	277.00	1.00	367.0	5.39	4.47	1.44	0.24	>50.0	0.01
BR-26-22	277.00	278.00	1.00	469.0	6.82	2.59	1.42	0.27	>50.0	0.05
BR-26-22	278.00	279.00	1.00	163.0	8.45	2.79	1.21	0.16	>50.0	0.03
BR-26-22	279.00	280.00	1.00	249.0	10.91	4.12	1.38	0.17	>50.0	0.06
BR-26-22	280.00	281.00	1.00	219.0	10.12	3.42	1.12	0.25	>50.0	0.07
BR-26-22	281.00	281.50	0.50	226.0	14.66	5.29	0.93	0.52	>50.0	0.12
BR-26-22	281.50	282.00	0.50	220.0	12.95	6.99	0.95	0.91	>50.0	0.12
BR-26-22	282.00	283.00	1.00	2.0	0.06	0.03	0.04	0.01	4.7	0.01
BR-26-22	283.00	284.00	1.00	2.0	0.08	0.01	0.02	<0.01	<1.0	<0.01
BR-26-22	284.00	284.80	0.80	<1.0	0.08	0.01	0.02	<0.01	<1.0	<0.01
BR-26-22	284.80	286.00	1.20	44.0	4.92	1.52	0.27	0.16	<1.0	0.10
BR-26-22	286.00	287.10	1.10	12.0	2.82	0.18	0.08	0.12	1.4	0.07

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-26-22	287.10	287.80	0.70	12.0	0.05	0.02	0.02	<0.01	<1.0	<0.01
BR-26-22	287.80	289.00	1.20	25.0	0.01	0.07	<0.01	<0.01	<1.0	0.01
BR-26-22	289.00	290.00	1.00	<1.0	0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-26-22	290.00	291.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	1.0	<0.01
BR-26-22	291.00	292.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-26-22	292.00	293.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	293.00	294.00	1.00	<1.0	0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-26-22	294.00	295.00	1.00	<1.0	0.03	<0.01	0.04	<0.01	<1.0	<0.01
BR-26-22	295.00	296.00	1.00	<1.0	0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-26-22	296.00	297.00	1.00	<1.0	0.05	0.01	0.09	<0.01	1.4	0.01
BR-26-22	297.00	298.00	1.00	<1.0	0.09	0.03	0.04	<0.01	<1.0	0.01
BR-26-22	298.00	299.00	1.00	3.0	0.16	0.06	0.07	0.01	<1.0	0.01
BR-26-22	299.00	299.80	0.80	12.0	1.53	0.89	0.05	0.10	<1.0	0.06
BR-26-22	302.80	304.00	1.20	<1.0	0.02	0.04	0.06	<0.01	<1.0	<0.01
BR-26-22	304.00	305.00	1.00	21.0	0.18	0.14	0.10	0.49	2.4	0.13
BR-26-22	305.00	306.00	1.00	<1.0	0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-26-22	306.00	307.00	1.00	<1.0	0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-26-22	307.00	308.00	1.00	35.0	0.14	0.07	0.13	0.37	3.7	0.04
BR-26-22	308.00	309.00	1.00	2.0	0.11	0.04	0.05	<0.01	<1.0	<0.01
BR-26-22	309.00	310.00	1.00	<1.0	0.08	0.03	0.03	<0.01	1.2	<0.01
BR-26-22	310.00	311.00	1.00	<1.0	0.03	<0.01	0.06	<0.01	<1.0	<0.01
BR-26-22	311.00	312.00	1.00	47.0	1.15	0.25	0.15	0.38	50.0	0.18
BR-26-22	312.00	313.00	1.00	140.0	0.63	0.23	0.18	0.49	10.4	0.08
BR-26-22	313.00	314.00	1.00	<1.0	0.09	0.02	0.06	<0.01	<1.0	<0.01
BR-26-22	314.00	315.00	1.00	3.0	0.10	0.03	0.07	<0.01	<1.0	<0.01
BR-26-22	315.00	316.00	1.00	<1.0	0.13	0.03	0.05	<0.01	<1.0	<0.01
BR-26-22	316.00	317.00	1.00	4.0	0.18	0.06	0.07	0.01	<1.0	0.01
BR-26-22	317.00	318.00	1.00	19.0	0.29	0.27	0.07	0.14	<1.0	0.05
BR-26-22	318.00	319.00	1.00	<1.0	0.06	0.04	0.06	<0.01	<1.0	<0.01
BR-26-22	319.00	320.00	1.00	<1.0	0.06	<0.01	<0.01	<0.01	<1.0	<0.01
BR-26-22	320.00	320.80	0.80	<1.0	0.05	0.01	0.02	<0.01	<1.0	<0.01
BR-27-22	0.00	112.9	122.90	Interval not sampled						
BR-27-22	112.90	113.80	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	113.80	115.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	115.00	116.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	116.00	117.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	117.00	118.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	118.00	119.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	119.00	120.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	120.00	121.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	121.00	122.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	122.00	123.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	123.00	124.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	124.00	125.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	125.00	126.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	126.10	127.30	1.20	<1.0	0.03	0.04	<0.01	<0.01	<1.0	<0.01
BR-27-22	127.30	128.20	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	128.20	129.20	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	129.20	130.20	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	130.20	131.10	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	131.10	132.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	132.00	133.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	133.10	134.20	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	134.20	135.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	135.40	136.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-27-22	136.40	137.50	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	137.50	138.70	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	138.70	140.80	2.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	140.80	143.70	2.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	143.70	146.80	3.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	146.80	149.80	3.00	<1.0	0.01	<0.01	<0.01	<0.01	1.2	<0.01
BR-27-22	149.80	152.40	2.60	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	152.40	154.10	1.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-27-22	154.10	155.30	1.20	<1.0	0.01	<0.01	0.01	<0.01	<1.0	0.02
BR-27-22	155.30	156.50	1.20	<1.0	<0.01	0.01	0.01	<0.01	<1.0	0.01
BR-27-22	156.50	157.60	1.10	<1.0	0.01	0.04	<0.01	0.01	<1.0	0.01
BR-27-22	157.60	158.50	0.90	<1.0	0.01	0.10	<0.01	0.01	<1.0	0.05
BR-27-22	158.50	159.70	1.20	<1.0	0.02	0.04	<0.01	0.01	<1.0	0.02
BR-27-22	159.70	160.70	1.00	56.0	0.61	2.02	0.66	0.10	8.8	0.04
BR-27-22	160.70	161.80	1.10	<1.0	0.09	0.05	0.01	<0.01	<1.0	0.02
BR-27-22	161.80	163.00	1.20	4.0	0.09	0.06	0.12	<0.01	<1.0	0.01
BR-27-22	163.00	163.80	0.80	7.0	0.16	0.12	0.23	0.04	<1.0	0.01
BR-27-22	163.80	164.90	1.10	28.0	1.20	0.56	0.29	0.28	14.3	0.08
BR-27-22	164.90	166.00	1.10	82.0	2.87	0.83	0.44	0.18	>50.0	0.11
BR-27-22	166.00	167.10	1.10	40.0	1.72	0.71	0.43	0.10	8.2	0.15
BR-27-22	167.10	168.00	0.90	<1.0	0.03	0.05	<0.01	<0.01	1.0	<0.01
BR-27-22	168.00	168.80	0.80	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	168.80	169.90	1.10	4.0	0.14	0.06	0.04	<0.01	<1.0	0.01
BR-27-22	169.90	170.80	0.90	4.0	0.12	0.05	0.05	<0.01	<1.0	0.02
BR-27-22	170.80	172.00	1.20	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	172.00	173.00	1.00	<1.0	0.27	0.02	<0.01	<0.01	<1.0	0.01
BR-27-22	173.00	174.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	174.00	175.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	175.00	176.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	176.00	177.20	1.20	<1.0	0.01	0.10	<0.01	<0.01	<1.0	<0.01
BR-27-22	177.20	178.30	1.10	<1.0	0.01	0.09	<0.01	<0.01	<1.0	0.01
BR-27-22	178.30	179.50	1.20	<1.0	<0.01	0.09	<0.01	<0.01	<1.0	<0.01
BR-27-22	179.50	180.60	1.10	<1.0	<0.01	0.04	<0.01	<0.01	<1.0	<0.01
BR-27-22	180.60	181.80	1.20	<1.0	<0.01	0.04	<0.01	<0.01	<1.0	<0.01
BR-27-22	181.80	183.00	1.20	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	183.00	184.00	1.00	<1.0	0.01	0.02	<0.01	<0.01	<1.0	0.01
BR-27-22	184.00	185.00	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	185.00	186.00	1.00	<1.0	<0.01	0.04	<0.01	<0.01	<1.0	0.01
BR-27-22	186.00	187.00	1.00	<1.0	<0.01	0.03	<0.01	<0.01	<1.0	<0.01
BR-27-22	187.00	188.00	1.00	<1.0	0.01	0.08	<0.01	<0.01	<1.0	<0.01
BR-27-22	188.00	189.00	1.00	<1.0	0.03	0.12	<0.01	<0.01	<1.0	<0.01
BR-27-22	189.00	190.00	1.00	<1.0	<0.01	0.03	<0.01	<0.01	1.6	<0.01
BR-27-22	190.00	191.00	1.00	<1.0	0.03	0.06	<0.01	<0.01	<1.0	<0.01
BR-27-22	191.00	192.00	1.00	<1.0	0.08	0.04	<0.01	<0.01	<1.0	0.01
BR-27-22	192.00	193.00	1.00	<1.0	0.04	0.01	<0.01	<0.01	<1.0	0.01
BR-27-22	193.00	194.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	194.00	195.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	195.00	196.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	196.00	197.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	197.00	198.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	0.01
BR-27-22	198.00	199.00	1.00	<1.0	0.10	0.05	<0.01	<0.01	<1.0	0.01
BR-27-22	199.00	200.00	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	200.00	201.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	201.00	202.00	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	202.00	203.00	1.00	4.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-27-22	203.00	204.00	1.00	14.0	0.04	0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	204.00	205.00	1.00	2.0	0.02	0.01	0.03	<0.01	<1.0	<0.01
BR-27-22	205.00	206.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	206.00	207.00	1.00	<1.0	0.03	0.02	0.01	<0.01	<1.0	<0.01
BR-27-22	207.00	208.00	1.00	<1.0	0.01	0.01	0.02	<0.01	<1.0	<0.01
BR-27-22	208.00	209.00	1.00	2.0	0.16	0.07	0.07	0.02	<1.0	0.02
BR-27-22	209.00	210.00	1.00	<1.0	0.08	0.01	0.05	<0.01	<1.0	<0.01
BR-27-22	210.00	210.80	0.80	17.0	3.07	1.21	0.12	0.05	2.3	0.03
BR-27-22	210.80	212.00	1.20	3.0	0.32	0.10	0.05	<0.01	1.3	<0.01
BR-27-22	212.00	213.00	1.00	6.0	0.40	0.07	0.06	<0.01	<1.0	<0.01
BR-27-22	213.00	214.00	1.00	3.0	0.11	0.02	0.03	<0.01	<1.0	<0.01
BR-27-22	214.00	215.00	1.00	4.0	0.25	0.06	0.05	<0.01	<1.0	<0.01
BR-27-22	215.00	216.00	1.00	<1.0	0.02	<0.01	0.02	<0.01	<1.0	<0.01
BR-27-22	216.00	217.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	217.00	218.00	1.00	8.0	0.14	0.09	<0.01	<0.01	<1.0	<0.01
BR-27-22	218.00	219.20	1.20	4.0	0.30	0.05	<0.01	<0.01	<1.0	<0.01
BR-27-22	219.20	220.40	1.20	8.0	0.06	0.02	<0.01	<0.01	<1.0	<0.01
BR-27-22	220.40	221.00	0.60	29.0	0.55	0.30	<0.01	0.01	5.1	0.01
BR-27-22	221.00	221.80	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-27-22	221.80	223.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-27-22	223.00	224.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-27-22	224.00	224.90	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-27-22	224.90	225.80	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-27-22	225.80	226.80	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	226.80	227.80	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-27-22	227.80	229.60	1.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-27-22	229.60	230.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-27-22	230.80	232.60	1.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-27-22	232.60	234.30	1.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-27-22	234.30	235.30	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.03
BR-27-22	235.30	236.50	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-27-22	236.50	237.70	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.03
BR-27-22	237.70	238.80	1.10	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	0.04
BR-27-22	238.80	240.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-27-22	240.00	241.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-27-22	241.00	242.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-27-22	242.00	243.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-27-22	243.00	244.00	1.00	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	0.01
BR-27-22	244.00	245.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	245.00	246.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-27-22	246.00	247.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	247.00	248.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	248.00	249.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	249.00	250.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	250.00	251.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	251.00	252.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	252.00	253.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	253.00	254.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	254.00	255.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	255.00	256.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-27-22	256.00	257.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	257.00	258.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	258.00	259.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-27-22	259.00	260.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	260.00	261.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-27-22	261.00	261.80	0.80	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	0.01
BR-27-22	261.80	262.60	0.80	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	0.01
BR-27-22	262.60	263.20	0.60	<1.0	0.03	0.04	0.01	0.02	13.8	<0.01
BR-27-22	263.20	263.80	0.60	<1.0	0.03	0.06	0.34	0.01	>50.0	0.01
BR-27-22	263.80	264.20	0.40	5.0	0.04	0.01	5.30	0.02	>50.0	0.02
BR-27-22	264.20	265.00	0.80	14.0	0.01	0.04	1.83	0.01	>50.0	0.01
BR-27-22	265.00	266.00	1.00	181.0	1.08	0.61	3.57	0.07	>50.0	0.05
BR-27-22	266.00	267.00	1.00	329.0	2.19	0.66	2.82	0.16	>50.0	0.08
BR-27-22	267.00	268.00	1.00	227.0	2.07	0.40	3.36	0.13	>50.0	0.07
BR-27-22	268.00	269.00	1.00	277.0	3.61	0.83	4.29	0.16	>50.0	0.10
BR-27-22	269.00	270.00	1.00	404.0	3.30	0.99	3.07	0.20	>50.0	0.12
BR-27-22	270.00	271.00	1.00	281.0	3.10	0.80	1.48	0.11	>50.0	0.07
BR-27-22	271.00	272.00	1.00	199.0	6.64	1.79	1.73	0.17	>50.0	0.09
BR-27-22	272.00	273.00	1.00	101.0	5.07	2.28	1.64	0.15	>50.0	0.07
BR-27-22	273.00	274.00	1.00	149.0	5.65	2.20	1.89	0.33	>50.0	0.16
BR-27-22	274.00	275.00	1.00	106.0	4.79	2.54	1.60	0.16	>50.0	0.08
BR-27-22	275.00	276.00	1.00	67.0	5.32	1.94	1.14	0.11	>50.0	0.06
BR-27-22	276.00	277.20	1.20	59.0	6.56	1.63	2.93	0.09	>50.0	0.05
BR-27-22	277.20	278.00	0.80	69.0	7.97	2.16	1.67	0.14	>50.0	0.08
BR-27-22	278.00	279.00	1.00	69.0	5.71	2.11	1.51	0.13	>50.0	0.07
BR-27-22	279.00	280.00	1.00	66.0	6.22	1.67	0.76	0.13	>50.0	0.07
BR-27-22	280.00	281.00	1.00	61.0	8.34	2.55	0.51	0.15	>50.0	0.06
BR-27-22	281.00	282.00	1.00	52.0	8.49	3.22	0.49	0.15	>50.0	0.07
BR-27-22	282.00	283.00	1.00	60.0	8.37	4.11	0.72	0.20	>50.0	0.08
BR-27-22	283.00	284.00	1.00	46.0	6.40	3.59	0.57	0.22	>50.0	0.05
BR-27-22	284.00	285.00	1.00	41.0	6.76	2.85	0.41	0.17	>50.0	0.02
BR-27-22	285.00	286.00	1.00	44.0	5.99	2.52	0.38	0.20	>50.0	0.03
BR-27-22	286.00	287.00	1.00	52.0	3.50	4.85	0.34	0.35	>50.0	0.03
BR-27-22	287.00	288.00	1.00	48.0	5.89	2.62	0.46	0.20	>50.0	0.04
BR-27-22	288.00	289.00	1.00	59.0	2.69	5.43	0.22	0.37	>50.0	0.04
BR-27-22	289.00	290.00	1.00	49.0	1.10	6.16	0.19	0.48	>50.0	0.04
BR-27-22	290.00	291.00	1.00	52.0	1.26	5.17	0.25	0.78	>50.0	0.08
BR-27-22	291.00	292.00	1.00	76.0	6.24	7.69	0.23	0.54	>50.0	0.08
BR-27-22	292.00	292.70	0.70	82.0	7.31	9.02	0.24	0.65	>50.0	0.06
BR-27-22	292.70	293.90	1.20	93.0	1.39	0.35	1.12	2.47	7.9	0.74
BR-27-22	293.90	295.00	1.10	24.0	0.17	0.12	0.23	0.01	1.9	0.02
BR-27-22	295.00	296.00	1.00	164.0	2.98	2.27	0.92	0.17	>50.0	0.05
BR-27-22	296.00	297.20	1.20	51.0	2.28	1.64	0.26	0.08	1.3	0.02
BR-27-22	297.20	298.00	0.80	30.0	0.91	0.80	0.26	0.10	<1.0	0.02
BR-27-22	298.00	298.70	0.70	43.0	0.66	0.57	0.29	3.00	1.4	0.42
BR-27-22	298.70	299.80	1.10	72.0	0.36	0.23	0.21	1.41	1.0	0.37
BR-27-22	299.80	300.60	0.80	10.0	0.64	0.25	0.07	0.03	2.7	0.01
BR-27-22	300.60	301.60	1.00	20.0	1.29	0.39	0.47	0.12	2.5	0.03
BR-27-22	301.60	302.80	1.20	1.0	0.01	<0.01	0.21	0.02	<1.0	0.01
BR-27-22	302.80	304.00	1.20	2.0	0.01	<0.01	0.13	0.01	<1.0	<0.01
BR-27-22	304.00	305.00	1.00	11.0	0.44	0.20	0.71	0.03	1.8	0.01
BR-27-22	305.00	306.00	1.00	19.0	0.56	0.23	0.17	0.09	<1.0	0.01
BR-27-22	306.00	307.00	1.00	2.0	0.09	0.01	0.10	<0.01	<1.0	<0.01
BR-27-22	307.00	308.00	1.00	3.0	0.05	0.01	0.04	0.01	3.4	0.01
BR-27-22	308.00	309.00	1.00	5.0	0.04	0.02	0.04	0.02	2.2	0.01
BR-27-22	309.00	310.00	1.00	13.0	0.07	0.04	0.04	0.05	2.5	0.03
BR-27-22	310.00	311.00	1.00	3.0	0.07	0.02	0.08	0.02	<1.0	0.01
BR-27-22	311.00	312.00	1.00	1.0	0.11	0.03	0.03	0.01	<1.0	0.01
BR-27-22	312.00	313.00	1.00	3.0	0.40	0.07	0.03	0.03	<1.0	0.02
BR-27-22	313.00	314.00	1.00	3.0	0.41	0.25	0.05	0.01	1.4	<0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-27-22	314.00	315.00	1.00	<1.0	0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-27-22	315.00	316.00	1.00	<1.0	0.04	0.02	<0.01	<0.01	1.1	<0.01
BR-27-22	316.00	317.00	1.00	<1.0	0.04	0.01	0.02	<0.01	<1.0	<0.01
BR-27-22	317.00	318.00	1.00	<1.0	0.13	0.07	0.03	0.01	<1.0	<0.01
BR-27-22	318.00	319.00	1.00	2.0	0.14	0.05	0.04	0.01	2.7	0.01
BR-27-22	319.00	320.00	1.00	1.0	0.04	0.01	0.05	<0.01	<1.0	<0.01
BR-27-22	320.00	321.00	1.00	7.0	0.42	0.20	0.07	0.10	<1.0	0.02
BR-27-22	321.00	322.00	1.00	1.0	0.03	<0.01	0.02	<0.01	<1.0	<0.01
BR-27-22	322.00	323.00	1.00	<1.0	0.06	<0.01	<0.01	<0.01	<1.0	<0.01
BR-27-22	323.00	324.00	1.00	<1.0	0.09	0.01	0.02	<0.01	<1.0	<0.01
BR-27-22	324.00	325.00	1.00	5.0	0.08	0.02	0.03	<0.01	<1.0	<0.01
BR-27-22	325.00	326.00	1.00	26.0	0.90	0.07	0.05	<0.01	1.5	<0.01
BR-27-22	326.00	327.00	1.00	19.0	0.43	0.16	0.06	<0.01	1.1	0.01
BR-27-22	327.00	328.00	1.00	7.0	0.38	0.08	0.04	<0.01	<1.0	0.03
BR-27-22	328.00	329.00	1.00	32.0	0.35	0.18	0.19	<0.01	1.2	<0.01
BR-27-22	329.00	329.80	0.80	11.0	0.35	0.10	0.29	<0.01	9.4	0.02
BR-28-22	0.00	107.60	107.60	Interval not sampled						
BR-28-22	107.60	108.30	0.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	108.30	109.00	0.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	109.00	110.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	110.00	110.80	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	110.80	111.70	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	111.70	112.10	0.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	112.10	113.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	113.00	114.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	114.00	115.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	115.00	116.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	116.00	117.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	117.10	118.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	118.00	119.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	119.20	120.00	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	120.00	121.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	121.00	122.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	122.00	123.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	123.00	124.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	124.00	125.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	125.00	126.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	126.00	126.90	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	126.90	128.00	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	128.00	129.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	129.00	130.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	130.10	131.30	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	131.30	132.40	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	132.40	133.50	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	133.50	134.90	1.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	134.90	136.30	1.40	<1.0	<0.01	<0.01	0.06	<0.01	<1.0	<0.01
BR-28-22	136.30	137.80	1.50	<1.0	0.13	0.02	<0.01	<0.01	<1.0	<0.01
BR-28-22	137.80	139.40	1.60	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	139.40	140.50	1.10	<1.0	0.03	0.04	<0.01	<0.01	<1.0	<0.01
BR-28-22	140.50	141.50	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	141.50	143.40	1.90	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	144.20	145.20	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	145.20	146.10	0.90	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	146.10	147.30	1.20	<1.0	<0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-28-22	147.30	148.00	0.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-28-22	148.00	149.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	149.00	150.30	1.30	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	150.30	151.00	0.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	151.00	152.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	152.00	153.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	153.00	154.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	154.20	155.00	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	155.00	156.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	156.10	158.80	2.70	2.0	0.01	0.02	<0.01	<0.01	<1.0	0.05
BR-28-22	158.80	160.00	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-28-22	160.00	161.20	1.20	<1.0	0.01	0.01	<0.01	<0.01	<1.0	0.02
BR-28-22	161.20	162.00	0.80	2.0	0.02	0.01	<0.01	<0.01	<1.0	0.02
BR-28-22	162.00	163.10	1.10	<1.0	0.01	0.01	<0.01	<0.01	<1.0	0.01
BR-28-22	163.10	164.30	1.20	<1.0	0.01	0.01	<0.01	<0.01	<1.0	0.04
BR-28-22	164.30	165.00	0.70	3.0	0.02	0.14	0.03	0.03	<1.0	0.03
BR-28-22	165.00	165.60	0.60	6.0	0.10	0.13	0.04	0.02	<1.0	0.02
BR-28-22	165.60	166.80	1.20	77.0	1.12	3.15	0.22	0.55	<1.0	0.27
BR-28-22	166.80	168.00	1.20	3.0	0.05	0.03	0.01	0.01	<1.0	0.01
BR-28-22	168.00	169.00	1.00	3.0	0.47	0.15	0.01	<0.01	<1.0	<0.01
BR-28-22	169.00	170.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	170.00	171.00	1.00	6.0	1.04	0.33	0.02	0.03	5.1	0.01
BR-28-22	171.00	172.00	1.00	3.0	0.15	0.10	0.03	0.03	8.7	0.01
BR-28-22	172.00	173.00	1.00	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	173.00	174.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	174.00	175.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	175.00	176.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	176.00	178.20	2.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	178.20	179.00	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	179.00	180.70	1.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	180.70	181.70	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	181.70	182.80	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	182.80	184.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	184.00	185.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	185.00	186.00	1.00	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-28-22	186.00	187.00	1.00	<1.0	0.03	0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	187.00	188.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	188.00	189.00	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	189.00	190.00	1.00	<1.0	0.011	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	190.00	191.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	191.00	192.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	192.00	192.70	0.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	192.70	193.50	0.80	<1.0	0.03	0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	193.50	194.00	0.50	<1.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	194.00	195.00	1.00	2.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	195.00	196.00	1.00	<1.0	0.07	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	196.00	197.00	1.00	<1.0	0.08	0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	197.00	198.00	1.00	3.0	0.07	0.07	<0.01	<0.01	<1.0	<0.01
BR-28-22	198.00	199.00	1.00	7.0	0.04	0.05	<0.01	0.01	<1.0	0.01
BR-28-22	199.00	200.00	1.00	1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	200.00	201.00	1.00	10.0	0.04	0.56	0.09	<0.01	<1.0	0.01
BR-28-22	201.00	202.00	1.00	3.0	0.22	0.03	0.17	<0.01	<1.0	<0.01
BR-28-22	202.00	203.00	1.00	<1.0	0.03	0.01	0.12	<0.01	<1.0	<0.01
BR-28-22	203.00	204.00	1.00	<1.0	0.04	0.01	0.03	<0.01	<1.0	<0.01
BR-28-22	204.00	205.00	1.00	2.0	0.15	0.02	0.02	<0.01	<1.0	<0.01
BR-28-22	205.00	206.00	1.00	<1.0	0.03	<0.01	0.03	<0.01	<1.0	<0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-28-22	206.00	207.00	1.00	3.0	0.02	0.01	0.03	<0.01	<1.0	<0.01
BR-28-22	207.00	208.00	1.00	45.0	0.03	0.04	0.02	0.05	<1.0	0.03
BR-28-22	208.00	209.00	1.00	10.0	0.65	0.17	0.03	0.02	<1.0	0.02
BR-28-22	209.00	210.00	1.00	39.0	0.97	0.60	0.05	0.05	<1.0	0.03
BR-28-22	210.00	211.00	1.00	42.0	0.18	0.05	0.02	0.01	<1.0	0.01
BR-28-22	211.00	212.00	1.00	<1.0	0.05	0.01	0.01	<0.01	<1.0	<0.01
BR-28-22	212.00	213.00	1.00	<1.0	0.07	0.02	0.02	<0.01	<1.0	<0.01
BR-28-22	213.00	214.00	1.00	5.0	0.20	0.04	0.02	<0.01	<1.0	<0.01
BR-28-22	214.00	215.00	1.00	5.0	0.42	0.03	0.02	<0.01	<1.0	<0.01
BR-28-22	215.00	216.00	1.00	<1.0	0.03	<0.01	0.02	<0.01	<1.0	<0.01
BR-28-22	216.00	217.00	1.00	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-28-22	217.00	218.00	1.00	17.0	0.07	0.03	0.07	<0.01	<1.0	0.01
BR-28-22	218.00	219.00	1.00	14.0	0.06	0.01	0.03	<0.01	<1.0	<0.01
BR-28-22	219.00	220.00	1.00	3.0	0.01	0.01	0.03	<0.01	<1.0	<0.01
BR-28-22	220.00	221.00	1.00	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-28-22	221.00	222.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	222.00	223.00	1.00	<1.0	0.07	0.02	0.02	<0.01	<1.0	<0.01
BR-28-22	223.00	224.00	1.00	<1.0	0.02	0.02	0.02	<0.01	<1.0	<0.01
BR-28-22	224.00	225.00	1.00	<1.0	<0.01	0.02	0.03	<0.01	<1.0	<0.01
BR-28-22	225.00	226.00	1.00	<1.0	0.19	0.04	0.02	<0.01	<1.0	<0.01
BR-28-22	226.00	227.00	1.00	2.0	0.51	0.15	<0.01	<0.01	<1.0	<0.01
BR-28-22	227.00	228.00	1.00	2.0	0.12	0.03	<0.01	<0.01	<1.0	<0.01
BR-28-22	228.00	229.00	1.00	2.0	0.13	0.03	<0.01	<0.01	<1.0	<0.01
BR-28-22	229.00	230.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	230.00	231.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	231.00	232.00	1.00	3.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	232.00	233.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	233.00	234.00	1.00	<1.0	<0.01	0.04	0.01	<0.01	<1.0	<0.01
BR-28-22	234.00	235.00	1.00	<1.0	0.03	0.07	0.02	<0.01	<1.0	<0.01
BR-28-22	235.00	236.00	1.00	3.0	0.36	0.13	<0.01	<0.01	<1.0	<0.01
BR-28-22	236.00	237.00	1.00	5.0	0.09	0.01	0.03	0.01	<1.0	<0.01
BR-28-22	237.00	238.00	1.00	<1.0	0.72	0.18	<0.01	<0.01	<1.0	<0.01
BR-28-22	238.00	239.00	1.00	7.0	0.08	0.16	<0.01	<0.01	<1.0	<0.01
BR-28-22	239.00	240.00	1.00	<1.0	0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-28-22	240.00	241.00	1.00	<1.0	0.03	0.02	0.02	<0.01	<1.0	<0.01
BR-28-22	241.00	242.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	242.00	243.00	1.00	2.0	0.04	0.01	0.04	<0.01	<1.0	<0.01
BR-28-22	243.00	244.00	1.00	2.0	0.04	0.01	0.02	<0.01	<1.0	<0.01
BR-28-22	244.00	245.00	1.00	4.0	0.05	0.01	<0.01	<0.01	2.8	<0.01
BR-28-22	245.00	246.00	1.00	6.0	0.06	0.02	<0.01	<0.01	1.4	<0.01
BR-28-22	246.00	247.00	1.00	7.0	0.27	0.02	<0.01	<0.01	1.2	<0.01
BR-28-22	247.00	248.00	1.00	8.0	0.05	0.03	<0.01	<0.01	1.1	<0.01
BR-28-22	248.00	249.00	1.00	2.0	0.04	0.01	<0.01	<0.01	1.2	<0.01
BR-28-22	249.00	250.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	250.00	251.00	1.00	<1.0	0.03	<0.01	<0.01	<0.01	1.2	<0.01
BR-28-22	251.00	252.00	1.00	<1.0	0.04	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	252.00	253.00	1.00	3.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	253.00	254.00	1.00	3.0	0.05	0.03	<0.01	<0.01	<1.0	<0.01
BR-28-22	254.00	255.00	1.00	3.0	0.06	0.01	0.01	<0.01	<1.0	<0.01
BR-28-22	255.00	256.00	1.00	3.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	256.00	257.00	1.00	9.0	0.06	0.03	<0.01	<0.01	<1.0	<0.01
BR-28-22	257.00	258.00	1.00	6.0	0.13	0.06	<0.01	<0.01	1.4	<0.01
BR-28-22	258.00	259.00	1.00	3.0	0.04	0.02	<0.01	<0.01	1.4	<0.01
BR-28-22	259.00	260.00	1.00	4.0	0.08	0.07	<0.01	0.01	<1.0	0.01
BR-28-22	260.00	261.00	1.00	1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-28-22	261.00	262.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	262.00	263.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	0.01
BR-28-22	263.00	264.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	264.00	265.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	265.00	266.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	266.00	267.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	267.00	268.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	268.00	269.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	269.00	270.00	1.00	<1.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	270.00	271.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	1.8	<0.01
BR-28-22	271.00	272.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	272.00	273.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-28-22	273.00	274.00	1.00	<1.0	0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-28-22	274.00	275.00	1.00	<1.0	0.01	0.01	0.02	<0.01	1.0	<0.01
BR-28-22	275.00	276.00	1.00	<1.0	0.02	0.02	<0.01	<0.01	1.7	0.01
BR-28-22	276.00	277.00	1.00	<1.0	0.01	0.01	<0.01	0.01	<1.0	0.01
BR-28-22	277.00	278.00	1.00	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-28-22	278.00	279.00	1.00	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-28-22	279.00	280.00	1.00	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-28-22	280.00	281.00	1.00	<1.0	0.04	<0.01	0.02	<0.01	1.0	<0.01
BR-28-22	281.00	282.00	1.00	<1.0	0.17	0.01	0.02	<0.01	<1.0	<0.01
BR-28-22	282.00	283.00	1.00	<1.0	0.09	0.01	0.04	<0.01	<1.0	<0.01
BR-28-22	283.00	284.00	1.00	4.0	0.13	0.19	0.04	0.04	<1.0	0.01
BR-28-22	284.00	285.00	1.00	8.0	0.51	0.48	0.04	0.06	2.6	0.01
BR-28-22	285.00	286.00	1.00	<1.0	0.06	0.04	0.02	0.02	<1.0	0.01
BR-28-22	286.00	287.00	1.00	9.0	0.18	0.20	0.06	0.19	<1.0	0.05
BR-28-22	287.00	288.00	1.00	<1.0	0.07	0.03	0.04	0.03	1.2	0.01
BR-28-22	288.00	289.00	1.00	<1.0	0.07	0.01	0.03	0.01	<1.0	0.01
BR-28-22	289.00	290.00	1.00	<1.0	0.07	0.01	0.02	<0.01	<1.0	0.013
BR-28-22	290.00	291.00	1.00	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-28-22	291.00	292.00	1.00	68.0	0.92	0.15	0.08	6.66	1.3	3.97
BR-28-22	292.00	293.00	1.00	<1.0	0.06	0.01	0.09	0.11	<1.0	0.02
BR-28-22	293.00	294.00	1.00	<1.0	0.10	<0.01	0.04	<0.01	<1.0	<0.01
BR-28-22	294.00	295.00	1.00	2.0	0.02	0.02	0.03	0.03	<1.0	0.02
BR-28-22	295.00	296.00	1.00	2.0	0.07	0.01	0.01	<0.01	<1.0	<0.01
BR-28-22	296.00	297.00	1.00	<1.0	0.27	0.08	0.07	<0.01	<1.0	<0.01
BR-28-22	297.00	298.00	1.00	3.0	0.56	0.08	0.04	<0.01	2.0	<0.01
BR-28-22	298.00	299.00	1.00	4.0	1.79	0.18	0.06	<0.01	2.3	<0.01
BR-28-22	299.00	300.00	1.00	<1.0	0.21	0.03	0.02	<0.01	<1.0	<0.01
BR-28-22	300.00	301.00	1.00	<1.0	0.15	0.03	0.04	<0.01	<1.0	<0.01
BR-28-22	301.00	302.00	1.00	3.0	0.50	0.16	0.01	<0.01	1.6	<0.01
BR-28-22	302.00	303.00	1.00	1.0	0.02	<0.01	0.02	<0.01	<1.0	<0.01
BR-28-22	303.00	304.00	1.00	1.0	0.02	<0.01	0.01	<0.01	<1.0	<0.01
BR-28-22	304.00	305.00	1.00	14.0	0.05	0.01	0.04	0.02	<1.0	0.01
BR-28-22	305.00	306.00	1.00	5.0	0.05	0.02	0.03	<0.01	<1.0	<0.01
BR-28-22	306.00	307.00	1.00	4.0	0.07	0.06	0.01	<0.01	<1.0	<0.01
BR-28-22	307.00	308.00	1.00	2.0	0.09	0.04	0.02	<0.01	1.6	<0.01
BR-28-22	308.00	309.00	1.00	1.0	0.18	<0.01	0.02	<0.01	<1.0	<0.01
BR-28-22	309.00	310.00	1.00	3.0	0.32	0.05	0.05	0.01	<1.0	0.01
BR-28-22	310.00	311.00	1.00	2.0	0.15	0.02	0.04	<0.01	<1.0	<0.01
BR-28-22	311.00	312.00	1.00	4.0	0.07	0.06	0.05	0.03	<1.0	0.02
BR-28-22	312.00	313.00	1.00	<1.0	0.15	0.01	0.05	<0.01	1.1	<0.01
BR-28-22	313.00	314.00	1.00	7.0	0.05	0.11	0.04	0.03	<1.0	0.01
BR-28-22	314.00	315.00	1.00	3.0	0.21	0.04	0.05	<0.01	<1.0	<0.01
BR-28-22	315.00	316.00	1.00	<1.0	0.07	0.02	0.05	<0.01	<1.0	<0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-28-22	316.00	317.00	1.00	<1.0	0.18	0.01	0.05	<0.01	<1.0	<0.01
BR-28-22	317.00	318.00	1.00	<1.0	0.17	0.04	0.04	<0.01	<1.0	<0.01
BR-28-22	318.00	319.00	1.00	<1.0	0.01	0.02	0.03	<0.01	<1.0	<0.01
BR-28-22	319.00	320.00	1.00	2.0	0.09	0.02	0.03	<0.01	1.8	<0.01
BR-28-22	320.00	320.80	0.80	<1.0	0.08	0.02	0.02	<0.01	2.8	<0.01
BR-29-22	0.00	113.00	113.00	Interval not sampled						
BR-29-22	113.00	114.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	114.00	115.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	115.00	116.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	116.00	116.90	0.90	<1.0	0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-29-22	116.90	118.00	1.10	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	118.00	119.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	119.00	120.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	120.00	121.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	121.00	122.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	122.00	123.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	123.00	124.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	124.00	125.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	125.00	126.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	126.00	127.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	127.00	128.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	128.00	129.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	129.00	130.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	130.00	131.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	131.00	132.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	132.00	133.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	133.00	134.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	134.10	135.30	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	135.30	136.50	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	136.50	138.40	1.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	138.40	140.60	2.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	140.60	142.60	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	142.60	143.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	143.80	145.40	1.60	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	145.40	148.30	2.90	<1.0	<0.01	0.03	<0.01	<0.01	<1.0	<0.01
BR-29-22	148.30	150.10	1.80	<1.0	0.01	0.02	0.01	<0.01	<1.0	<0.01
BR-29-22	150.10	151.30	1.20	<1.0	0.01	0.05	<0.01	0.01	<1.0	<0.01
BR-29-22	151.30	152.50	1.20	<1.0	0.07	0.12	<0.01	0.01	<1.0	<0.01
BR-29-22	152.50	153.60	1.10	<1.0	0.01	0.05	<0.01	0.03	<1.0	0.01
BR-29-22	153.60	154.60	1.00	<1.0	0.01	0.02	<0.01	<0.01	<1.0	0.01
BR-29-22	154.60	155.60	1.00	<1.0	0.01	0.03	<0.01	<0.01	<1.0	0.01
BR-29-22	155.60	156.60	1.00	<1.0	0.01	0.02	<0.01	<0.01	<1.0	0.01
BR-29-22	156.60	157.60	1.00	<1.0	<0.01	0.01	0.02	<0.01	<1.0	0.01
BR-29-22	157.60	158.60	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	0.02
BR-29-22	158.60	159.70	1.10	1.0	0.06	0.03	<0.01	0.01	<1.0	0.02
BR-29-22	159.70	160.90	1.20	2.0	0.06	0.91	<0.01	0.05	<1.0	0.05
BR-29-22	160.90	162.00	1.10	22.0	1.12	0.58	0.21	0.10	<1.0	0.11
BR-29-22	162.00	163.00	1.00	61.0	4.47	2.16	0.20	0.36	1.2	0.37
BR-29-22	163.00	164.00	1.00	10.0	1.05	0.39	0.21	0.03	<1.0	0.16
BR-29-22	164.00	165.00	1.00	24.0	0.92	0.61	0.25	0.17	2.8	0.17
BR-29-22	165.00	166.00	1.00	41.0	1.86	1.08	0.26	0.05	3.4	0.15
BR-29-22	166.00	167.00	1.00	25.0	0.90	0.57	0.20	0.10	9.7	0.16
BR-29-22	167.00	168.00	1.00	3.0	0.12	0.06	0.02	<0.01	<1.0	0.01
BR-29-22	168.00	169.00	1.00	5.0	0.11	0.21	0.03	<0.01	<1.0	0.01
BR-29-22	169.00	170.00	1.00	<1.0	0.05	0.03	0.01	<0.01	<1.0	<0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-29-22	170.00	171.00	1.00	<1.0	<0.01	0.01	0.03	<0.01	<1.0	<0.01
BR-29-22	171.00	172.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	172.00	173.00	1.00	<1.0	0.01	0.03	<0.01	<0.01	<1.0	<0.01
BR-29-22	173.00	174.00	1.00	<1.0	0.11	0.02	0.02	<0.01	<1.0	0.01
BR-29-22	174.00	175.00	1.00	<1.0	0.05	0.01	0.02	<0.01	<1.0	<0.01
BR-29-22	175.00	176.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	176.00	177.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	177.00	178.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	178.00	179.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	179.00	180.00	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	180.00	181.20	1.20	<1.0	<0.01	0.03	<0.01	<0.01	<1.0	<0.01
BR-29-22	181.20	182.40	1.20	<1.0	<0.01	0.03	<0.01	<0.01	<1.0	<0.01
BR-29-22	182.40	183.50	1.10	<1.0	0.01	0.14	<0.01	<0.01	<1.0	0.01
BR-29-22	183.50	184.60	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	184.60	185.50	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	185.50	186.70	1.20	<1.0	0.12	0.01	<0.01	<0.01	<1.0	0.01
BR-29-22	186.70	187.90	1.20	<1.0	0.06	<0.01	<0.01	<0.01	<1.0	0.01
BR-29-22	187.90	189.00	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-29-22	189.00	190.00	1.00	<1.0	0.08	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	190.00	191.00	1.00	<1.0	0.06	0.01	<0.01	<0.01	<1.0	0.01
BR-29-22	191.00	192.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	192.00	193.00	1.00	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	193.00	194.00	1.00	<1.0	0.08	<0.01	<0.01	<0.01	<1.0	0.01
BR-29-22	194.00	195.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	195.00	196.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	196.00	197.00	1.00	4.0	0.01	0.01	<0.01	<0.01	<1.0	0.01
BR-29-22	197.00	198.00	1.00	5.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	198.00	199.00	1.00	9.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	199.00	199.80	0.80	41.0	0.01	0.02	<0.01	0.01	<1.0	0.02
BR-29-22	199.80	201.00	1.20	12.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	201.00	202.00	1.00	5.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	202.00	203.00	1.00	1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	203.00	204.00	1.00	5.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	204.00	205.00	1.00	3.0	0.10	0.01	0.02	<0.01	<1.0	<0.01
BR-29-22	205.00	206.00	1.00	12.0	1.81	0.55	0.32	0.02	<1.0	0.02
BR-29-22	206.00	207.00	1.00	1.0	0.08	0.01	0.04	<0.01	<1.0	<0.01
BR-29-22	207.00	208.00	1.00	4.0	0.71	0.15	0.06	0.01	<1.0	0.02
BR-29-22	208.00	208.80	0.80	<1.0	<0.01	<0.01	0.05	<0.01	<1.0	<0.01
BR-29-22	208.80	210.00	1.20	<1.0	0.13	0.06	0.08	0.01	<1.0	0.01
BR-29-22	210.00	211.00	1.00	7.0	0.47	0.20	0.05	0.06	3.0	0.05
BR-29-22	211.00	212.00	1.00	4.0	0.03	0.01	0.03	<0.01	<1.0	<0.01
BR-29-22	212.00	213.00	1.00	5.0	0.07	0.03	0.06	<0.01	<1.0	<0.01
BR-29-22	213.00	214.00	1.00	6.0	0.28	0.14	0.04	<0.01	1.5	<0.01
BR-29-22	214.00	215.00	1.00	7.0	0.14	0.06	0.03	<0.01	<1.0	<0.01
BR-29-22	215.00	215.90	0.90	220.0	0.62	0.26	0.06	0.05	6.6	0.02
BR-29-22	215.90	216.80	0.90	<1.0	0.02	0.01	0.02	<0.01	<1.0	<0.01
BR-29-22	216.80	217.90	1.10	<1.0	0.03	<0.01	0.03	<0.01	<1.0	<0.01
BR-29-22	217.90	218.90	1.00	<1.0	0.02	0.01	0.04	<0.01	<1.0	<0.01
BR-29-22	218.90	220.10	1.20	<1.0	0.01	0.01	0.02	<0.01	<1.0	<0.01
BR-29-22	220.10	221.30	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	221.30	222.20	0.90	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-29-22	222.20	223.30	1.10	<1.0	0.04	0.02	0.09	<0.01	<1.0	<0.01
BR-29-22	223.30	224.20	0.90	<1.0	0.02	0.01	0.03	<0.01	<1.0	<0.01
BR-29-22	224.20	225.40	1.20	47.0	0.79	0.33	<0.01	<0.01	5.2	0.01
BR-29-22	225.40	226.60	1.20	22.0	0.19	0.05	<0.01	0.01	1.2	0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results > 50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-29-22	226.60	228.00	1.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-29-22	228.00	229.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	229.20	230.30	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-29-22	230.30	231.50	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-29-22	231.50	232.20	0.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.03
BR-29-22	232.20	233.30	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.03
BR-29-22	233.30	234.40	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.04
BR-29-22	234.40	235.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.03
BR-29-22	235.40	235.90	0.50	<1.0	0.60	0.02	<0.01	<0.01	1.1	0.03
BR-29-22	235.90	237.00	1.10	<1.0	1.21	0.03	<0.01	<0.01	6.0	0.40
BR-29-22	237.00	238.00	1.00	58.0	0.94	0.17	<0.01	<0.01	9.0	0.14
BR-29-22	238.00	239.00	1.00	102.0	1.58	0.47	<0.01	<0.01	14.2	0.26
BR-29-22	239.00	240.00	1.00	47.0	1.23	0.33	<0.01	<0.01	6.7	0.19
BR-29-22	240.00	241.10	1.10	356.0	5.4	1.28	<0.01	<0.01	15.6	0.23
BR-29-22	241.10	242.00	0.90	318.0	2.26	0.52	<0.01	<0.01	>50.0	0.08
BR-29-22	242.00	243.20	1.20	99.0	2.68	0.39	<0.01	<0.01	5.7	0.04
BR-29-22	243.20	244.00	0.80	97.0	0.57	0.13	<0.01	0.01	2.9	0.04
BR-29-22	244.00	245.00	1.00	74.0	1.88	0.42	<0.01	<0.01	1.5	0.03
BR-29-22	245.00	246.00	1.00	44.0	0.57	0.22	<0.01	<0.01	4.3	0.02
BR-29-22	246.00	247.00	1.00	19.0	0.34	0.08	<0.01	<0.01	3.6	0.01
BR-29-22	247.00	247.60	0.60	28.0	0.19	0.14	<0.01	<0.01	1.9	0.01
BR-29-22	247.60	248.50	0.90	130.0	2.32	0.65	<0.01	<0.01	15.9	0.02
BR-29-22	248.50	249.50	1.00	91.0	1.38	0.30	<0.01	<0.01	8.5	0.02
BR-29-22	249.50	250.30	0.80	43.0	2.56	0.07	<0.01	<0.01	9.2	0.01
BR-29-22	250.30	251.00	0.70	28.0	0.38	0.07	<0.01	<0.01	3.2	0.02
BR-29-22	251.00	252.00	1.00	86.0	1.57	0.56	0.06	<0.01	7.7	0.13
BR-29-22	252.00	253.10	1.10	54.0	0.68	0.42	0.01	<0.01	11.6	0.23
BR-29-22	253.10	254.10	1.00	4.0	1.95	0.06	<0.01	0.01	6.7	0.51
BR-29-22	254.10	254.60	0.50	<1.0	0.03	<0.01	<0.01	<0.01	8.5	0.40
BR-29-22	254.60	255.40	0.80	48.0	4.07	0.04	<0.01	<0.01	15.6	0.30
BR-29-22	255.40	256.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.04
BR-29-22	256.40	257.20	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.03
BR-29-22	257.20	258.00	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.03
BR-29-22	258.00	259.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.03
BR-29-22	259.00	260.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-29-22	260.10	261.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	261.00	262.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-29-22	262.00	263.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-29-22	263.00	264.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-29-22	264.00	264.90	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-29-22	264.90	266.00	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-29-22	266.00	267.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-29-22	267.00	268.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-29-22	268.00	269.00	1.00	<1.0	0.03	0.05	0.04	0.04	>50.0	0.01
BR-29-22	269.00	269.60	0.60	<1.0	<0.01	0.02	<0.01	0.01	5.9	0.02
BR-29-22	269.60	270.00	0.40	3.0	0.05	0.06	2.80	0.01	>50.0	<0.01
BR-29-22	270.00	271.00	1.00	1029.0	0.17	0.69	2.93	0.16	>50.0	0.09
BR-29-22	271.00	272.00	1.00	464.0	0.43	0.55	1.36	0.10	>50.0	0.05
BR-29-22	272.00	273.00	1.00	10.0	0.12	0.33	9.74	<0.01	>50.0	0.02
BR-29-22	273.00	274.00	1.00	25.0	0.87	0.44	6.23	<0.01	>50.0	0.01
BR-29-22	274.00	275.00	1.00	306.0	8.68	4.26	4.00	0.31	>50.0	0.05
BR-29-22	275.00	276.00	1.00	95.0	11.53	3.04	1.59	0.14	>50.0	0.07
BR-29-22	276.00	277.00	1.00	76.0	10.90	2.98	0.83	0.11	>50.0	0.03
BR-29-22	277.00	278.00	1.00	65.0	10.46	2.96	0.70	0.13	>50.0	0.03
BR-29-22	278.00	279.00	1.00	53.0	10.51	3.55	0.53	0.12	>50.0	0.02

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-29-22	279.00	280.00	1.00	45.0	10.30	3.19	0.53	0.13	>50.0	0.03
BR-29-22	280.00	281.00	1.00	51.0	10.88	3.33	0.65	0.12	>50.0	0.04
BR-29-22	281.00	282.00	1.00	46.0	10.51	2.69	0.55	0.11	>50.0	0.05
BR-29-22	282.00	283.00	1.00	52.0	10.96	3.54	0.52	0.11	>50.0	0.04
BR-29-22	283.00	284.00	1.00	46.0	11.33	3.26	0.47	0.13	>50.0	0.05
BR-29-22	284.00	285.00	1.00	47.0	11.35	3.26	0.52	0.10	>50.0	0.05
BR-29-22	285.00	286.00	1.00	55.0	10.88	3.40	0.85	0.13	>50.0	0.06
BR-29-22	286.00	287.00	1.00	83.0	12.25	3.86	2.36	0.15	>50.0	0.07
BR-29-22	287.00	288.00	1.00	59.0	10.39	3.65	0.61	0.17	>50.0	0.08
BR-29-22	288.00	289.00	1.00	70.0	13.46	4.65	1.01	0.16	>50.0	0.06
BR-29-22	289.00	290.00	1.00	61.0	13.94	3.68	1.30	0.16	>50.0	0.04
BR-29-22	290.00	291.00	1.00	52.0	7.50	4.95	1.00	0.19	>50.0	0.05
BR-29-22	291.00	292.00	1.00	69.0	4.19	5.95	0.30	0.39	>50.0	0.17
BR-29-22	292.00	293.00	1.00	62.0	14.72	3.78	0.55	0.18	>50.0	0.07
BR-29-22	293.00	294.00	1.00	102.0	8.03	4.84	0.41	0.34	>50.0	0.19
BR-29-22	294.00	295.00	1.00	59.0	7.53	6.06	0.26	0.28	>50.0	0.12
BR-29-22	295.00	296.00	1.00	60.0	8.04	5.64	0.33	0.36	>50.0	0.15
BR-29-22	296.00	297.00	1.00	97.0	7.34	4.38	0.44	0.48	>50.0	0.23
BR-29-22	297.00	298.00	1.00	97.0	11.34	4.96	0.68	0.35	>50.0	0.24
BR-29-22	298.00	299.00	1.00	102.0	5.23	9.82	0.93	0.44	>50.0	0.43
BR-29-22	299.00	300.00	1.00	95.0	5.29	8.00	1.07	0.43	>50.0	0.41
BR-29-22	300.00	301.00	1.00	156.0	4.60	13.85	1.22	1.56	>50.0	0.79
BR-29-22	301.00	302.20	1.20	199.0	8.92	12.34	1.79	2.00	>50.0	2.78
BR-29-22	302.20	303.00	0.80	106.0	2.11	0.93	0.88	0.47	7.1	0.22
BR-29-22	303.00	304.00	1.00	6.0	0.13	0.05	0.06	0.02	1.1	0.01
BR-29-22	304.00	305.00	1.00	4.0	0.16	0.05	0.02	0.04	<1.0	0.03
BR-29-22	305.00	306.00	1.00	41.0	0.26	0.12	0.10	0.13	1.2	0.02
BR-29-22	306.00	306.50	0.50	<1.0	0.09	0.01	0.06	<0.01	<1.0	0.01
BR-29-22	306.50	307.00	0.50	9.0	0.46	0.17	0.07	0.07	1.8	0.03
BR-29-22	307.00	308.00	1.00	19.0	0.82	0.23	0.12	0.10	1.5	0.03
BR-29-22	308.00	309.00	1.00	52.0	2.24	0.57	0.09	0.32	5.6	0.13
BR-29-22	309.00	310.00	1.00	21.0	0.76	0.24	0.12	0.06	4.3	0.03
BR-29-22	310.00	311.00	1.00	<1.0	0.01	<0.01	0.05	<0.01	<1.0	0.01
BR-29-22	311.00	312.00	1.00	2.0	0.10	0.06	0.03	0.02	<1.0	<0.01
BR-29-22	312.00	313.00	1.00	<1.0	0.07	0.01	0.06	<0.01	<1.0	<0.01
BR-29-22	313.00	313.80	0.80	<1.0	0.06	0.01	0.20	0.02	<1.0	0.02
BR-29-22	313.80	315.00	1.20	9.0	1.94	0.30	0.05	0.06	9.3	0.03
BR-29-22	315.00	316.00	1.00	<1.0	0.11	0.01	<0.01	<0.01	<1.0	0.01
BR-29-22	316.00	317.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-29-22	317.00	318.00	1.00	<1.0	0.11	0.01	0.10	<0.01	<1.0	<0.01
BR-29-22	318.00	319.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-29-22	319.00	320.00	1.00	13.0	0.04	0.04	<0.01	0.03	<1.0	0.03
BR-29-22	320.00	321.00	1.00	3.0	0.28	0.02	0.02	<0.01	<1.0	<0.01
BR-29-22	321.00	322.00	1.00	4.0	0.61	0.12	0.02	0.04	<1.0	0.03
BR-29-22	322.00	323.00	1.00	27.0	1.82	0.49	0.02	0.05	1.8	0.02
BR-29-22	323.00	324.10	1.10	12.0	0.49	0.11	0.02	0.03	1.5	0.01
BR-29-22	324.10	325.00	0.90	14.0	0.06	0.04	0.06	0.02	<1.0	0.01
BR-29-22	325.00	326.00	1.00	3.0	0.09	0.01	0.01	<0.01	<1.0	<0.01
BR-29-22	326.00	327.00	1.00	4.0	0.09	0.02	<0.01	<0.01	<1.0	<0.01
BR-29-22	327.00	328.00	1.00	14.0	0.20	0.02	0.06	<0.01	<1.0	<0.01
BR-29-22	328.00	329.00	1.00	4.0	0.18	0.01	0.04	<0.01	<1.0	<0.01
BR-29-22	329.00	330.00	1.00	3.0	0.02	0.02	0.09	<0.01	<1.0	<0.01
BR-30-22	0.00	91.70	91.70	Interval not sampled						
BR-30-22	91.70	93.00	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	93.00	94.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-30-22	94.00	95.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	95.00	96.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	96.00	97.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	97.00	98.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	98.00	99.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	99.00	100.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	100.00	101.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	101.00	102.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	102.00	103.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	103.00	104.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	104.00	105.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	105.00	106.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	106.00	107.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	107.00	108.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	108.00	109.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	109.00	110.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	110.00	111.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	111.00	112.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	112.00	113.10	1.10	<1.0	0.01	0.01	<0.01	0.01	<1.0	<0.01
BR-30-22	113.10	114.30	1.20	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	114.30	115.30	1.00	<1.0	0.01	0.03	<0.01	<0.01	<1.0	<0.01
BR-30-22	115.30	116.00	0.70	<1.0	0.01	<0.01	<0.01	0.01	<1.0	<0.01
BR-30-22	116.00	117.00	1.00	<1.0	0.02	0.02	<0.01	0.01	<1.0	<0.01
BR-30-22	117.00	118.00	1.00	<1.0	0.01	0.14	<0.01	0.01	<1.0	<0.01
BR-30-22	118.00	119.00	1.00	<1.0	0.01	0.09	<0.01	0.01	<1.0	<0.01
BR-30-22	119.00	120.00	1.00	<1.0	0.02	0.09	<0.01	0.02	<1.0	<0.01
BR-30-22	120.00	121.10	1.10	<1.0	0.01	0.03	<0.01	<0.01	<1.0	<0.01
BR-30-22	121.10	122.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	122.00	123.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	123.00	124.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	124.00	125.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	125.00	126.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-30-22	126.00	126.90	0.90	<1.0	<0.01	<0.01	<0.01	0.01	<1.0	0.02
BR-30-22	126.90	128.00	1.10	<1.0	<0.01	0.02	<0.01	0.01	<1.0	0.02
BR-30-22	128.00	129.00	1.00	<1.0	<0.01	0.04	<0.01	0.01	<1.0	0.02
BR-30-22	129.00	129.80	0.80	<1.0	0.02	0.03	<0.01	0.01	<1.0	0.03
BR-30-22	129.80	131.00	1.20	<1.0	0.22	0.04	<0.01	<0.01	<1.0	0.02
BR-30-22	131.00	132.00	1.00	<1.0	0.10	0.02	<0.01	<0.01	<1.0	<0.01
BR-30-22	132.00	133.00	1.00	<1.0	0.06	0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	133.00	134.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	134.00	135.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	135.00	136.00	1.00	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	136.00	137.20	1.20	<1.0	0.02	0.01	0.01	<0.01	<1.0	<0.01
BR-30-22	137.20	138.00	0.80	<1.0	0.05	0.02	0.02	<0.01	<1.0	<0.01
BR-30-22	138.00	139.00	1.00	<1.0	0.08	0.05	0.02	<0.01	1.3	<0.01
BR-30-22	139.00	140.00	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	140.00	141.00	1.00	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	141.00	142.00	1.00	<1.0	0.04	0.01	<0.01	<0.01	<1.0	0.03
BR-30-22	142.00	143.00	1.00	<1.0	0.04	0.02	<0.01	<0.01	<1.0	<0.01
BR-30-22	143.00	144.00	1.00	<1.0	0.03	0.20	<0.01	<0.01	<1.0	<0.01
BR-30-22	144.00	145.00	1.00	<1.0	0.01	0.14	<0.01	<0.01	<1.0	<0.01
BR-30-22	145.00	146.00	1.00	<1.0	0.06	0.10	<0.01	<0.01	<1.0	<0.01
BR-30-22	146.00	147.00	1.00	<1.0	0.07	0.03	<0.01	<0.01	<1.0	<0.01
BR-30-22	147.00	148.20	1.20	<1.0	0.02	0.11	<0.01	<0.01	<1.0	<0.01
BR-30-22	148.20	149.20	1.00	<1.0	0.09	0.37	<0.01	<0.01	<1.0	0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-30-22	149.20	150.00	0.80	<1.0	0.09	0.09	<0.01	<0.01	<1.0	<0.01
BR-30-22	150.00	151.00	1.00	<1.0	0.01	0.35	<0.01	<0.01	<1.0	<0.01
BR-30-22	151.00	152.00	1.00	<1.0	0.02	0.26	<0.01	<0.01	<1.0	<0.01
BR-30-22	152.00	153.00	1.00	<1.0	0.05	0.10	<0.01	<0.01	<1.0	<0.01
BR-30-22	153.00	154.00	1.00	<1.0	0.05	0.15	<0.01	<0.01	<1.0	<0.01
BR-30-22	154.00	155.00	1.00	2.0	0.20	0.36	<0.01	<0.01	2.5	0.01
BR-30-22	155.00	156.00	1.00	<1.0	0.03	0.09	<0.01	<0.01	<1.0	<0.01
BR-30-22	156.00	157.00	1.00	<1.0	0.06	0.02	<0.01	<0.01	<1.0	<0.01
BR-30-22	157.00	158.00	1.00	<1.0	0.07	0.01	<0.01	<0.01	1.0	<0.01
BR-30-22	158.00	158.70	0.70	<1.0	0.10	0.07	<0.01	<0.01	1.2	<0.01
BR-30-22	158.70	159.90	1.20	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	159.90	161.00	1.10	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	161.00	162.00	1.00	<1.0	0.02	0.013	<0.01	<0.01	<1.0	<0.01
BR-30-22	162.00	163.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	163.00	164.10	1.10	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	164.10	165.30	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	165.30	166.00	0.70	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	166.00	167.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	167.00	168.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	168.00	169.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	169.00	170.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	170.00	171.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	171.00	172.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	172.00	173.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	173.00	174.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	1.0	<0.01
BR-30-22	174.00	175.20	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	175.20	176.40	1.20	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	176.40	177.40	1.00	12.0	0.19	0.04	<0.01	<0.01	<1.0	<0.01
BR-30-22	177.40	179.00	1.60	3.0	0.02	<0.01	<0.01	<0.01	<1.0	0.02
BR-30-22	179.00	180.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-30-22	180.00	181.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	181.00	182.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-30-22	182.00	183.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	183.00	184.30	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	184.30	185.70	1.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	185.70	186.80	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	186.80	187.80	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	187.80	189.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	189.00	190.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	190.00	191.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	191.00	192.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	192.00	193.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	193.00	194.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	194.00	195.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	195.00	196.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	196.00	197.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	197.00	198.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	198.00	199.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	199.00	200.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	200.00	201.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	201.00	202.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	202.00	203.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	203.00	204.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	204.00	205.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	205.00	206.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-30-22	206.00	207.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	0.01
BR-30-22	207.00	208.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	208.00	209.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	209.00	210.20	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-30-22	210.20	211.20	1.00	<1.0	0.01	0.01	0.02	<0.01	<1.0	0.02
BR-30-22	211.20	211.80	0.60	<1.0	0.02	0.01	0.32	<0.01	<1.0	0.01
BR-30-22	211.80	212.50	0.70	160.0	1.36	1.20	0.46	0.08	>50.0	0.02
BR-30-22	212.50	213.00	0.50	289.0	21.51	9.36	2.29	0.35	>50.0	0.21
BR-30-22	213.00	214.00	1.00	295.0	13.08	4.86	1.67	0.24	>50.0	0.14
BR-30-22	214.00	215.00	1.00	222.0	10.25	2.96	1.22	0.20	>50.0	0.14
BR-30-22	215.00	216.00	1.00	180.0	10.14	2.42	1.18	0.20	>50.0	0.14
BR-30-22	216.00	217.00	1.00	141.0	13.51	4.94	1.21	0.26	>50.0	0.11
BR-30-22	217.00	218.00	1.00	111.0	12.81	5.00	1.18	0.25	>50.0	0.07
BR-30-22	218.00	219.00	1.00	78.0	11.09	3.38	0.84	0.16	>50.0	0.04
BR-30-22	219.00	220.00	1.00	87.0	9.89	4.04	0.98	0.17	>50.0	0.03
BR-30-22	220.00	221.00	1.00	89.0	10.63	4.39	0.76	0.23	>50.0	0.04
BR-30-22	221.00	222.00	1.00	103.0	13.59	4.90	1.13	0.29	>50.0	0.02
BR-30-22	222.00	223.00	1.00	72.0	13.03	2.60	1.10	0.22	>50.0	0.04
BR-30-22	223.00	224.00	1.00	93.0	13.75	4.62	1.01	0.26	>50.0	0.05
BR-30-22	224.00	225.00	1.00	86.0	12.59	1.80	0.92	0.29	>50.0	0.07
BR-30-22	225.00	226.00	1.00	106.0	12.88	5.87	0.57	0.29	>50.0	0.07
BR-30-22	226.00	227.20	1.20	136.0	13.28	6.13	0.65	0.88	>50.0	0.15
BR-30-22	227.20	228.00	0.80	215.0	14.31	22.86	1.07	2.37	>50.0	0.25
BR-30-22	228.00	229.00	1.00	221.0	24.90	19.58	1.25	1.75	>50.0	0.32
BR-30-22	229.00	230.00	1.00	218.0	25.67	16.48	1.05	1.34	>50.0	0.30
BR-30-22	230.00	231.00	1.00	233.0	39.79	22.40	1.44	1.76	2.5	0.27
BR-30-22	231.00	232.00	1.00	207.0	31.24	17.91	1.18	1.61	>50.0	0.23
BR-30-22	232.00	233.00	1.00	149.0	19.95	6.31	1.44	0.93	>50.0	0.16
BR-30-22	233.00	234.00	1.00	462.0	33.06	12.42	2.15	2.28	>50.0	0.35
BR-30-22	234.00	235.00	1.00	481.0	35.14	17.19	2.44	2.63	14.0	0.51
BR-30-22	235.00	236.00	1.00	391.0	36.65	18.00	2.06	3.38	5.7	0.21
BR-30-22	236.00	237.00	1.00	548.0	24.21	22.60	2.28	3.25	<1.0	0.30
BR-30-22	237.00	237.80	0.80	360.0	12.67	4.70	1.53	0.71	6.5	0.19
BR-30-22	237.80	238.20	0.40	30.0	0.43	0.18	0.14	0.02	<1.0	0.01
BR-30-22	238.20	239.00	0.80	98.0	2.98	2.28	0.50	0.07	>50.0	0.03
BR-30-22	239.00	240.00	1.00	182.0	3.95	8.84	0.39	0.83	11.3	0.21
BR-30-22	240.00	241.00	1.00	122.0	3.38	11.04	0.34	2.81	6.7	0.29
BR-30-22	241.00	242.10	1.10	63.0	2.79	2.13	0.65	1.05	12.4	0.35
BR-30-22	242.10	243.20	1.10	35.0	2.33	0.43	0.71	0.49	15.1	0.20
BR-30-22	243.20	244.00	0.80	108.0	10.58	2.15	1.88	0.45	>50.0	0.29
BR-30-22	244.00	244.90	0.90	115.0	9.30	3.60	0.81	0.36	>50.0	0.17
BR-30-22	244.90	245.90	1.00	6.0	0.32	0.11	0.13	0.06	1.1	0.03
BR-30-22	245.90	246.30	0.40	421.0	9.82	26.58	0.80	1.25	<1.0	0.82
BR-30-22	246.30	247.00	0.70	1.0	0.17	0.07	0.20	<0.01	3.3	<0.01
BR-30-22	247.00	248.00	1.00	12.0	0.59	0.71	0.14	0.04	<1.0	0.02
BR-30-22	248.00	249.00	1.00	7.0	0.59	0.13	0.33	0.01	<1.0	0.01
BR-30-22	249.00	250.00	1.00	9.0	0.57	0.24	0.28	0.01	<1.0	0.01
BR-30-22	250.00	251.00	1.00	39.0	4.49	2.00	0.09	0.08	<1.0	0.06
BR-30-22	251.00	252.00	1.00	4.0	0.65	0.12	0.15	<0.01	4.8	<0.01
BR-30-22	252.00	253.00	1.00	<1.0	0.05	0.01	0.11	<0.01	<1.0	<0.01
BR-30-22	253.00	254.00	1.00	12.0	0.95	0.37	0.11	0.09	<1.0	0.05
BR-30-22	254.00	254.70	0.70	<1.0	0.10	0.02	0.10	<0.01	<1.0	<0.01
BR-30-22	254.70	255.40	0.70	2.0	0.07	0.03	0.08	<0.01	<1.0	<0.01
BR-30-22	255.40	256.20	0.80	42.0	0.60	0.14	0.08	0.07	<1.0	0.02
BR-30-22	256.20	257.00	0.80	29.0	0.65	0.46	0.12	0.06	<1.0	0.03

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-30-22	257.00	257.70	0.70	211.0	2.59	2.05	0.56	0.47	1.1	0.40
BR-30-22	257.70	259.20	1.50	5.0	0.20	0.08	0.07	<0.01	<1.0	<0.01
BR-30-22	259.20	260.00	0.80	2.0	0.33	0.12	0.06	<0.01	2.9	<0.01
BR-30-22	260.00	261.00	1.00	1.0	0.15	0.02	0.07	<0.01	1.0	<0.01
BR-30-22	261.00	262.00	1.00	1.0	0.14	0.04	0.05	<0.01	1.0	0.01
BR-30-22	262.00	263.00	1.00	3.0	0.04	0.07	0.04	0.02	<1.0	0.02
BR-30-22	263.00	264.00	1.00	<1.0	0.23	0.01	0.04	<0.01	2.2	0.01
BR-30-22	264.00	265.00	1.00	<1.0	0.14	0.03	0.06	<0.01	5.0	0.01
BR-30-22	265.00	266.00	1.00	<1.0	0.19	0.02	0.04	<0.01	5.0	<0.01
BR-30-22	266.00	267.00	1.00	<1.0	0.05	0.03	<0.01	<0.01	<1.0	0.01
BR-30-22	267.00	268.00	1.00	<1.0	0.09	<0.01	0.01	<0.01	<1.0	<0.01
BR-30-22	268.00	269.00	1.00	<1.0	0.41	0.01	0.03	<0.01	<1.0	<0.01
BR-30-22	269.00	270.00	1.00	<1.0	0.13	<0.01	0.02	<0.01	<1.0	<0.01
BR-30-22	270.00	271.00	1.00	<1.0	0.09	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-22	271.00	272.00	1.00	<1.0	0.32	0.13	<0.01	0.02	<1.0	0.05
BR-30-22	272.00	273.00	1.00	<1.0	0.05	0.01	<0.01	<0.01	1.2	0.01
BR-30-22	273.00	274.00	1.00	<1.0	0.08	0.06	0.04	0.02	<1.0	0.05
BR-30-22	274.00	275.00	1.00	<1.0	0.08	0.07	0.03	0.02	<1.0	0.03
BR-30-22	275.00	276.00	1.00	<1.0	0.10	0.02	0.02	<0.01	<1.0	0.01
BR-30-22	276.00	277.00	1.00	<1.0	0.12	0.01	0.03	<0.01	<1.0	<0.01
BR-30-22	277.00	278.00	1.00	<1.0	0.06	0.01	<0.01	<0.01	<1.0	0.01
BR-30-22	278.00	279.00	1.00	<1.0	0.03	<0.01	0.02	<0.01	<1.0	<0.01
BR-30-22	279.00	280.00	1.00	<1.0	0.03	<0.01	0.01	<0.01	<1.0	<0.01
BR-30-22	280.00	281.00	1.00	5.0	0.04	0.06	<0.01	0.06	<1.0	0.05
BR-30-22	281.00	282.00	1.00	<1.0	0.21	0.05	0.04	<0.01	1.8	0.01
BR-30-22	282.00	283.00	1.00	<1.0	0.12	0.04	0.04	<0.01	1.3	0.01
BR-30-22	283.00	283.70	0.70	<1.0	0.21	0.04	0.06	<0.01	1.4	0.01
BR-30-22	283.70	284.70	1.00	18.0	0.81	0.41	0.03	0.13	9.8	0.05
BR-30-22	284.70	285.70	1.00	10.0	0.15	0.13	0.04	0.07	<1.0	0.06
BR-30-22	285.70	286.70	1.00	36.0	0.91	1.72	0.11	0.09	<1.0	0.09
BR-30-22	286.70	287.70	1.00	30.0	1.52	0.55	0.10	0.04	2.2	0.04
BR-31-22	0.00	68.80	68.80	Interval not sampled						
BR-32-22	113.60	114.60	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	114.60	115.20	0.60	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	115.20	116.00	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	116.00	117.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	117.00	118.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	118.00	119.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	119.00	119.50	0.50	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	119.50	121.20	1.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	121.20	122.60	1.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	122.60	124.10	1.50	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	124.10	125.10	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	125.10	126.00	0.90	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	126.00	127.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	127.00	128.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	128.00	129.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	129.00	130.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	130.00	131.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	131.00	132.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	132.00	133.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	133.00	133.90	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	133.90	134.30	0.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	134.30	136.30	2.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	136.30	137.30	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results > 50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-32-22	137.30	138.20	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	138.20	139.10	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	139.10	140.60	1.50	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	140.60	142.60	2.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	142.60	143.60	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	143.60	146.40	2.80	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	146.40	149.60	3.20	<1.0	<0.01	0.05	<0.01	<0.01	<1.0	<0.01
BR-32-22	149.60	151.50	1.90	<1.0	0.04	0.01	<0.01	<0.01	<1.0	0.01
BR-32-22	151.50	152.60	1.10	<1.0	0.02	0.11	<0.01	0.01	<1.0	0.01
BR-32-22	152.60	154.10	1.50	<1.0	0.02	0.14	<0.01	0.02	<1.0	0.01
BR-32-22	154.10	155.00	0.90	<1.0	0.01	0.01	<0.01	<0.01	<1.0	0.02
BR-32-22	155.00	156.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-32-22	156.00	157.20	1.20	<1.0	0.02	0.01	<0.01	<0.01	<1.0	0.02
BR-32-22	157.20	158.00	0.80	8.0	<0.01	0.15	<0.01	<0.01	<1.0	0.04
BR-32-22	158.00	158.80	0.80	12.0	0.03	0.24	<0.01	0.01	<1.0	0.04
BR-32-22	158.80	160.00	1.20	<1.0	0.01	0.02	<0.01	<0.01	<1.0	0.03
BR-32-22	160.00	161.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-32-22	161.00	161.60	0.60	<1.0	0.02	0.05	0.02	0.01	<1.0	0.02
BR-32-22	161.60	163.60	2.00	<1.0	0.05	0.09	0.01	0.01	<1.0	0.01
BR-32-22	163.60	164.10	0.50	<1.0	<0.01	0.05	0.01	0.01	<1.0	0.02
BR-32-22	164.10	165.60	1.50	<1.0	0.02	0.07	<0.01	0.02	<1.0	<0.01
BR-32-22	165.60	166.80	1.20	<1.0	0.09	0.09	<0.01	0.02	<1.0	0.01
BR-32-22	166.80	167.90	1.10	<1.0	0.02	0.05	0.02	0.01	<1.0	0.01
BR-32-22	167.90	168.40	0.50	<1.0	<0.01	0.01	<0.01	0.01	<1.0	0.02
BR-32-22	168.40	169.40	1.00	<1.0	0.01	0.11	0.04	0.01	<1.0	0.02
BR-32-22	169.40	170.20	0.80	<1.0	0.02	0.03	0.005	0.01	<1.0	0.01
BR-32-22	170.20	170.80	0.60	53.0	1.19	0.68	0.19	0.06	>50.0	0.15
BR-32-22	170.80	171.70	0.90	192.0	7.78	2.94	0.64	0.22	>50.0	0.35
BR-32-22	171.70	172.50	0.80	96.0	0.06	0.25	0.80	0.12	>50.0	4.44
BR-32-22	172.50	173.00	0.50	187.0	6.84	2.92	1.58	0.21	>50.0	2.20
BR-32-22	173.00	174.00	1.00	336.0	10.82	4.16	2.46	0.34	>50.0	2.72
BR-32-22	174.00	175.00	1.00	455.0	18.87	7.52	3.94	0.43	>50.0	3.96
BR-32-22	175.00	176.00	1.00	190.0	7.64	2.68	2.20	0.29	>50.0	2.30
BR-32-22	176.00	177.00	1.00	137.0	4.75	3.79	1.60	0.40	>50.0	2.43
BR-32-22	177.00	178.20	1.20	357.0	9.64	4.89	3.02	0.65	>50.0	5.34
BR-32-22	178.20	179.60	1.40	61.0	1.48	3.09	0.61	0.09	<1.0	0.08
BR-32-22	179.60	180.80	1.20	13.0	0.43	0.72	0.13	0.03	<1.0	0.03
BR-32-22	180.80	182.00	1.20	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	182.00	183.00	1.00	<1.0	0.01	0.03	<0.01	<0.01	<1.0	<0.01
BR-32-22	183.00	184.00	1.00	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	184.00	185.00	1.00	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	185.00	186.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	186.00	187.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	187.00	188.20	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	188.20	188.90	0.70	<1.0	0.02	0.01	<0.01	<0.01	<1.0	0.01
BR-32-22	188.90	190.10	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	190.10	191.30	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	191.30	192.00	0.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	192.00	193.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	193.00	194.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-32-22	194.00	195.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	195.00	196.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	196.00	197.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	197.00	198.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	198.00	199.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-32-22	199.00	200.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	200.00	201.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	201.00	202.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	202.00	203.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	203.00	204.00	1.00	<1.0	0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-32-22	204.00	205.00	1.00	7.0	0.01	0.12	<0.01	<0.01	<1.0	<0.01
BR-32-22	205.00	206.00	1.00	<1.0	<0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-32-22	206.00	207.00	1.00	4.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	207.00	208.00	1.00	14.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	208.00	209.00	1.00	3.0	0.04	0.02	0.01	<0.01	<1.0	<0.01
BR-32-22	209.00	210.00	1.00	<1.0	0.01	0.02	0.01	<0.01	<1.0	<0.01
BR-32-22	210.00	211.00	1.00	6.0	0.20	0.12	0.12	<0.01	<1.0	<0.01
BR-32-22	211.00	212.00	1.00	2.0	0.04	0.02	0.03	<0.01	<1.0	<0.01
BR-32-22	212.00	213.00	1.00	3.0	0.32	0.08	0.05	<0.01	<1.0	<0.01
BR-32-22	213.00	214.00	1.00	<1.0	0.02	0.01	0.04	<0.01	<1.0	<0.01
BR-32-22	214.00	215.00	1.00	4.0	0.23	0.04	0.04	<0.01	<1.0	<0.01
BR-32-22	215.00	216.00	1.00	11.0	2.12	0.17	0.05	0.03	<1.0	0.01
BR-32-22	216.00	217.00	1.00	17.0	0.61	0.60	0.11	0.24	<1.0	0.05
BR-32-22	217.00	218.00	1.00	8.0	0.26	0.10	0.16	<0.01	<1.0	<0.01
BR-32-22	218.00	219.00	1.00	<1.0	0.02	0.01	0.03	<0.01	<1.0	<0.01
BR-32-22	219.00	220.00	1.00	5.0	0.08	0.02	0.04	<0.01	<1.0	<0.01
BR-32-22	220.00	221.00	1.00	3.0	0.09	0.04	0.02	<0.01	<1.0	<0.01
BR-32-22	221.00	222.00	1.00	3.0	0.03	0.01	0.02	<0.01	<1.0	<0.01
BR-32-22	222.00	223.00	1.00	18.0	0.06	0.04	0.03	0.04	<1.0	<0.01
BR-32-22	223.00	224.00	1.00	239.0	0.82	0.44	0.07	0.77	1.0	0.09
BR-32-22	224.00	225.00	1.00	763.0	7.28	11.90	0.16	0.65	<1.0	0.14
BR-32-22	225.00	226.00	1.00	272.0	2.87	3.00	0.07	0.17	1.5	0.02
BR-32-22	226.00	227.00	1.00	3.0	0.18	0.14	0.04	<0.01	<1.0	<0.01
BR-32-22	227.00	228.00	1.00	9.0	0.43	0.39	0.02	0.01	<1.0	<0.01
BR-32-22	228.00	229.00	1.00	3.0	0.05	0.11	0.02	<0.01	<1.0	<0.01
BR-32-22	229.00	230.00	1.00	1.0	0.01	0.08	0.02	<0.01	<1.0	<0.01
BR-32-22	230.00	231.00	1.00	4.0	0.05	0.10	0.02	<0.01	<1.0	<0.01
BR-32-22	231.00	232.00	1.00	22.0	0.12	0.68	0.02	0.10	<1.0	0.04
BR-32-22	232.00	233.00	1.00	46.0	0.11	1.10	0.06	0.12	<1.0	0.03
BR-32-22	233.00	234.00	1.00	2.0	0.03	<0.01	0.03	<0.01	<1.0	<0.01
BR-32-22	234.00	235.00	1.00	1.0	0.03	0.09	0.01	<0.01	<1.0	<0.01
BR-32-22	235.00	236.00	1.00	2.0	0.09	0.05	0.03	<0.01	1.6	<0.01
BR-32-22	236.00	237.10	1.10	20.0	0.58	0.14	0.02	0.01	2.6	0.02
BR-32-22	237.10	238.00	0.90	29.0	0.53	0.32	<0.01	<0.01	5.1	0.01
BR-32-22	238.00	239.00	1.00	65.0	0.83	0.41	<0.01	<0.01	10.7	0.01
BR-32-22	239.00	240.00	1.00	289.0	4.68	1.35	<0.01	0.04	>50.0	0.03
BR-32-22	240.00	241.00	1.00	649.0	8.19	3.42	<0.01	0.08	>50.0	0.07
BR-32-22	241.00	242.00	1.00	1502.0	4.76	6.70	<0.01	0.04	13.9	0.07
BR-32-22	242.00	243.00	1.00	745.0	5.77	2.14	<0.01	0.01	>50.0	0.02
BR-32-22	243.00	244.00	1.00	296.0	0.78	0.519	<0.01	0.00	6.0	0.02
BR-32-22	244.00	245.00	1.00	19.0	0.30	0.15	<0.01	<0.01	1.6	<0.01
BR-32-22	245.00	246.00	1.00	17.0	0.70	0.06	<0.01	<0.01	1.1	<0.01
BR-32-22	246.00	247.00	1.00	15.0	0.21	0.07	<0.01	<0.01	<1.0	<0.01
BR-32-22	247.00	248.00	1.00	82.0	0.84	0.40	<0.01	<0.01	3.8	0.01
BR-32-22	248.00	249.00	1.00	12.0	0.40	0.11	<0.01	<0.01	2.4	0.01
BR-32-22	249.00	250.00	1.00	29.0	0.67	0.29	<0.01	<0.01	4.1	0.01
BR-32-22	250.00	251.00	1.00	15.0	0.29	0.35	<0.01	<0.01	1.8	<0.01
BR-32-22	251.00	252.00	1.00	30.0	0.12	0.30	<0.01	<0.01	1.1	0.01
BR-32-22	252.00	253.00	1.00	8.0	0.20	0.10	<0.01	<0.01	1.8	<0.01
BR-32-22	253.00	254.00	1.00	24.0	0.24	0.21	<0.01	<0.01	3.0	0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-32-22	254.00	255.00	1.00	25.0	0.36	0.32	<0.01	<0.01	2.4	0.01
BR-32-22	255.00	256.00	1.00	17.0	0.51	0.27	<0.01	<0.01	2.4	<0.01
BR-32-22	256.00	257.00	1.00	14.0	0.15	0.22	<0.01	<0.01	2.6	0.01
BR-32-22	257.00	258.00	1.00	12.0	1.36	0.11	<0.01	<0.01	2.5	<0.01
BR-32-22	258.00	259.00	1.00	11.0	0.04	0.24	<0.01	<0.01	2.5	<0.01
BR-32-22	259.00	260.00	1.00	9.0	0.50	0.18	<0.01	<0.01	4.7	<0.01
BR-32-22	260.00	261.00	1.00	58.0	3.64	1.78	<0.01	0.01	13.0	0.01
BR-32-22	261.00	262.00	1.00	36.0	1.55	0.97	<0.01	0.01	7.9	0.01
BR-32-22	262.00	263.00	1.00	9.0	0.50	0.22	<0.01	<0.01	4.4	<0.01
BR-32-22	263.00	264.00	1.00	12.0	0.05	0.15	<0.01	<0.01	2.6	<0.01
BR-32-22	264.00	265.00	1.00	67.0	2.09	1.18	<0.01	0.01	9.8	0.02
BR-32-22	265.00	266.00	1.00	62.0	1.86	0.89	<0.01	<0.01	10.0	0.01
BR-32-22	266.00	267.00	1.00	25.0	0.90	0.46	<0.01	<0.01	5.3	<0.01
BR-32-22	267.00	268.20	1.20	7.0	0.03	0.03	<0.01	<0.01	<1.0	0.01
BR-32-22	268.20	269.30	1.10	4.0	0.33	0.12	0.03	<0.01	3.9	0.03
BR-32-22	269.30	270.00	0.70	268.0	5.57	2.46	0.78	0.16	>50.0	0.18
BR-32-22	270.00	271.00	1.00	376.0	4.73	2.09	0.61	0.11	>50.0	0.12
BR-32-22	271.00	272.00	1.00	159.0	1.28	1.18	0.44	0.21	>50.0	0.23
BR-32-22	272.00	273.00	1.00	70.0	0.87	1.10	0.58	0.02	>50.0	0.03
BR-32-22	273.00	273.60	0.60	15.0	0.35	0.85	0.77	0.02	>50.0	0.04
BR-32-22	273.60	274.00	0.40	6.0	0.28	0.06	0.29	0.01	>50.0	0.05
BR-32-22	274.00	274.90	0.90	5.0	0.15	0.11	0.25	0.01	>50.0	0.01
BR-32-22	274.90	276.00	1.10	1.0	0.37	0.14	0.35	<0.01	>50.0	<0.01
BR-32-22	276.00	277.00	1.00	28.0	0.18	0.18	0.69	0.03	>50.0	0.03
BR-32-22	277.00	278.00	1.00	179.0	3.08	1.84	0.84	0.15	>50.0	0.05
BR-32-22	278.00	279.00	1.00	746.0	4.82	3.19	1.43	0.47	>50.0	0.10
BR-32-22	279.00	280.00	1.00	225.0	3.26	2.03	0.77	0.08	>50.0	0.07
BR-32-22	280.00	281.00	1.00	147.0	0.92	3.61	0.53	0.13	>50.0	0.05
BR-32-22	281.00	282.00	1.00	180.0	7.94	2.97	0.72	0.12	>50.0	0.09
BR-32-22	282.00	283.00	1.00	146.0	3.49	1.81	0.40	0.11	>50.0	0.07
BR-32-22	283.00	284.00	1.00	237.0	4.63	3.63	0.46	0.14	>50.0	0.06
BR-32-22	284.00	285.00	1.00	163.0	2.60	2.52	0.44	0.13	>50.0	0.04
BR-32-22	285.00	286.00	1.00	391.0	5.35	3.23	0.76	0.15	>50.0	0.06
BR-32-22	286.00	287.00	1.00	396.0	8.53	5.07	1.30	0.29	>50.0	0.06
BR-32-22	287.00	288.00	1.00	172.0	14.25	4.98	1.06	0.44	>50.0	0.04
BR-32-22	288.00	289.00	1.00	111.0	9.24	3.13	0.95	0.29	>50.0	<0.01
BR-32-22	289.00	290.00	1.00	129.0	8.20	3.25	1.08	0.21	>50.0	0.02
BR-32-22	290.00	291.00	1.00	98.0	8.41	3.37	1.02	0.20	>50.0	0.02
BR-32-22	291.00	292.00	1.00	77.0	10.15	2.56	0.77	0.24	>50.0	0.03
BR-32-22	292.00	293.00	1.00	81.0	11.88	4.23	0.90	0.31	>50.0	0.04
BR-32-22	293.00	294.00	1.00	64.0	11.32	3.48	0.66	0.27	>50.0	0.01
BR-32-22	294.00	295.00	1.00	141.0	10.39	6.53	1.57	0.46	>50.0	0.08
BR-32-22	295.00	296.00	1.00	160.0	9.05	3.96	2.70	0.30	>50.0	0.04
BR-32-22	296.00	296.50	0.50	304.0	4.15	2.63	2.30	0.23	>50.0	0.10
BR-32-22	296.50	297.00	0.50	72.0	1.76	0.82	0.58	0.07	>50.0	0.05
BR-32-22	297.00	298.00	1.00	20.0	0.80	0.30	0.07	0.02	1.2	0.05
BR-32-22	298.00	299.00	1.00	84.0	7.12	4.49	0.31	0.37	4.0	0.31
BR-32-22	299.00	300.00	1.00	4.0	0.32	0.03	0.07	<0.01	1.4	<0.01
BR-32-22	300.00	301.20	1.20	1.0	0.22	0.02	0.03	<0.01	3.2	<0.01
BR-32-22	301.20	302.40	1.20	6.0	0.82	0.11	0.06	<0.01	3.5	<0.01
BR-32-22	302.40	303.60	1.20	8.0	0.39	0.12	0.06	<0.01	2.5	<0.01
BR-32-22	303.60	304.80	1.20	4.0	0.42	0.06	0.02	<0.01	1.6	0.01
BR-32-22	304.80	306.00	1.20	<1.0	0.12	0.03	0.03	<0.01	2.1	<0.01
BR-32-22	306.00	307.20	1.20	<1.0	0.07	0.02	0.04	<0.01	<1.0	<0.01
BR-32-22	307.20	308.40	1.20	<1.0	0.11	0.01	0.02	<0.01	<1.0	<0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results >50%.



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-32-22	308.40	309.60	1.20	<1.0	0.06	0.03	0.02	0.01	<1.0	0.01
BR-32-22	309.60	310.80	1.20	<1.0	0.14	0.03	0.03	<0.01	1.1	<0.01
BR-32-22	310.80	312.00	1.20	<1.0	0.11	0.03	0.03	<0.01	<1.0	<0.01
BR-32-22	312.00	313.20	1.20	2.0	0.28	0.05	0.03	<0.01	2.8	<0.01
BR-32-22	313.20	314.40	1.20	2.0	0.26	0.07	0.04	<0.01	<1.0	<0.01
BR-32-22	314.40	315.60	1.20	1.0	0.05	0.01	0.02	<0.01	<1.0	<0.01
BR-32-22	315.60	316.50	0.90	4.0	0.26	0.09	<0.01	<0.01	2.9	<0.01
BR-32-22	316.50	317.00	0.50	<1.0	0.34	0.02	0.01	<0.01	<1.0	<0.01
BR-32-22	317.00	317.80	0.80	<1.0	0.02	<0.01	0.01	<0.01	<1.0	<0.01
BR-32-22	317.80	318.40	0.60	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	318.40	319.60	1.20	4.0	0.05	0.02	0.01	<0.01	<1.0	<0.01
BR-32-22	319.60	320.80	1.20	13.0	0.15	0.12	<0.01	<0.01	3.5	<0.01
BR-32-22	320.80	322.00	1.20	2.0	0.08	0.04	<0.01	<0.01	3.6	<0.01
BR-32-22	322.00	323.20	1.20	<1.0	0.05	0.02	0.01	<0.01	<1.0	<0.01
BR-32-22	323.20	324.40	1.20	3.0	0.16	0.02	0.01	<0.01	<1.0	<0.01
BR-32-22	324.40	325.60	1.20	7.0	0.31	0.05	<0.01	<0.01	4.6	<0.01
BR-32-22	325.60	326.80	1.20	3.0	0.34	0.04	<0.01	<0.01	<1.0	<0.01
BR-32-22	326.80	328.00	1.20	<1.0	0.01	0.01	0.02	<0.01	<1.0	<0.01
BR-32-22	328.00	329.20	1.20	3.0	0.12	0.10	0.03	<0.01	1.10	<0.01
BR-32-22	329.20	330.40	1.20	4.0	0.49	0.07	0.05	<0.01	1.10	<0.01
BR-32-22	330.40	331.60	1.20	<1.0	0.08	0.06	0.03	<0.01	<1.0	<0.01
BR-32-22	331.60	332.80	1.20	4.0	0.06	0.02	0.03	<0.01	<1.0	<0.01
BR-32-22	332.80	334.00	1.20	2.0	0.04	0.01	0.02	<0.01	<1.0	<0.01
BR-32-22	334.00	335.20	1.20	19.0	0.07	0.05	0.02	0.01	1.8	0.01
BR-32-22	335.20	336.40	1.20	28.0	0.06	0.02	0.01	0.06	<1.0	0.04
BR-32-22	336.40	337.60	1.20	83.0	0.02	0.01	<0.01	0.11	<1.0	0.07
BR-32-22	337.60	338.80	1.20	8.0	0.06	0.02	0.01	<0.01	1.1	<0.01
BR-32-22	338.80	340.00	1.20	5.0	0.02	0.01	0.01	<0.01	<1.0	<0.01
BR-32-22	340.00	341.20	1.20	7.0	0.04	0.07	<0.01	<0.01	<1.0	<0.01
BR-32-22	341.20	342.40	1.20	4.0	0.17	0.01	<0.01	<0.01	<1.0	<0.01
BR-32-22	342.40	343.50	1.10	15.0	0.02	0.15	0.02	<0.01	<1.0	<0.01

Note: BaSO₄ results are capped at 50%, awaiting final XRF analysis for BaO results > 50%.

APPENDIX 2: JORC TABLES

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>	Drill core samples were collected from half cut PQ3 and HQ3 diameter core, where the core was sawn exactly in half along a pre-defined cutting line. The half core samples, typically weighing between 4-12kg, were placed into labelled and tagged sample bags prior to dispatch to the SGS Ankara laboratory in Turkey. Sample intervals were determined by the geologist, usually at 1m intervals within massive ore, otherwise separated on narrower intervals where geological boundaries exist.
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	Sample intervals were selected by the logging geologist based on geological criteria or using a nominal maximum 1m sample length in homogenous massive sulphide ore. A minimum sample length of 0.2m is employed where necessary. Sampling is based on visually mineralised intervals, with a calibrated portable XRF device used only as a guide.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems.</i>	For drill hole analyses, diamond drilling was used to obtain 4 to 12kg samples, crushed and pulverized at SGS Ankara, Turkey (code PRP89). All core samples were sent to SGS Ankara, Turkey by truck for gold analysis by 30-gram fire assay with AA finish (code FAA303), and multi-element analyses were conducted by the same lab using a highly oxidising digestion with ICP-AES finish (code ICM40B).



Section 1 Sampling Techniques and Data
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
	<i>Unusual commodities or mineralisation types (e.g., submarine nodules) may warrant disclosure of detailed information.</i>	Barite was assayed using lithium borate fusion prior to acid dissolution and ICP-MS analysis (code ICP95A). Overlimit Barium (>10%) results were analysed using portable pXRF (code pXRF73C27) and the results above detection limit (50%) sent to SGS Lakefield, Canada by air freight for XRF analysis (GC_XR76V).
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	All drill holes were drilled using PQ3 and HQ3 diameter core. All drill holes were drilled by drilling contractor Drillex BH d.o.o., a division of Drillex International. PQ3 and HQ3 core was held in a core barrel by a stainless steel "split" inner tube. The use of the inner tube ensured that all core maintained its orientation prior to removal into the core trays. Drill core was stored in suitable core boxes and stacked inside the exploration facility in Vares. All drillholes were surveyed at 9m and every 30m thereafter by a Reflex "Ezy-Track" digital down-hole survey tool. No significant deviation or drilling problems have been identified.
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	All core was geotechnically logged to verify drillers blocks, record run length, recovered length, core recovery (%) and RQD.
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	There is no observed relationship between sample recovery and grade, and no significant loss of core. No sample bias has been identified. Core recoveries are generally >90%
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	Core samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	All core is photographed. Core logging is both qualitative and quantitative. Logging records lithology, alteration, structures, veining, sulphide minerals and percentages.
	<i>The total length and percentage of the relevant intersections logged.</i>	100% of drill core is logged.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	Drill core was cut in half using an Almonte automatic diamond core saw. Nominally 1 in 30 samples were cut in quarters, and both halves analysed (for purposes of field duplicates).
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	Not applicable, as all samples are core.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	Collection of around 4-6kg of half core material with subsequent pulverisation of the total charge provided an appropriate and representative sample for analysis. Sample preparation was undertaken at the SGS Ankara, to industry best practice.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	Whole rock blanks and certified standards (~1 in 15) were introduced to the sample run to ensure laboratory QAQC. Industry best practice was adopted by SGS for laboratory sub-sampling and the avoidance of any cross contamination. SGS inserted internal controls and cleaned all sampling equipment with a barren quartz rock every 20 samples. All sample preparation stations and equipment were compressed air cleaned after every sample. A QAQC inspection of SGS facilities was completed in October 2022 by Adriatic Metals.
	<i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i>	The half core sampling is considered a reasonable representation of the in-situ material. Nominally 1 in 30 samples were cut in quarters, and both halves analysed (for purposes of field duplicates). All field duplicate, coarse duplicate and pulp duplicates are reviewed and compared. Standards and Blanks are investigated if over 2SD from certified mean and re-assay initiated if over 3SD or as required when over 2SD to validate materials either side of poorly performing blanks or standards.



Section 1 Sampling Techniques and Data
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	Sample size of around 4-12kg is appropriate and to reasonably represent the material being tested.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	Sample preparation was undertaken at the facilities of SGS in Ankara, Turkey. Assay analysis was completed at SGS Ankara, Turkey. All facilities are industry best practice and ISO certified. Multi elements were assayed by an ICP-AES technique following a four-acid digest. Gold was determined using a fire assay on nominal 30g charges. Barite was determined from a lithium meta-borate fusion followed by dissolution and ICP-AES analysis. Total carbon and sulphur was determined by a Leco analyzer. All techniques were appropriate for the elements being determined. Use of a 4-Acid digest is a near-total digestion of all minerals present. Additional XRF analysis is required to determine accurate concentrations of barium as part of reported assays.
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the Analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	There was no reliance on determination of analysis by geophysical tools. All analyses as reported and used in any calculations are by ISO certified laboratories, (SGS Ankara), using calibrated, industry standard and recognized methods, QAQC and equipment.
	<i>Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e., lack of bias) and precision have been established.</i>	Certified Reference Materials ("CRM's"), certified blanks, quarter core replicates were considered to be appropriate for the elements being analysed. CRM's, blanks and replicates were added at a rate better than 1 in 15. All results reported by SGS on the CRMs and blanks were within 3 standard deviations (3SD). Where deviations greater than 2SD were noted, investigations were completed and where necessary samples above and below queried Standards and Blanks were re-assayed. To date returned results are considered to be representative of material sampled. A program of 5% of assay pulps being submitted for Umpire lab re-assay is under way as part of ongoing QAQC controls in addition to measures already in place.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	There has been no independent re-logging of mineralised intervals. . Significant mineralisation is reviewed internally by multiple Senior geological staff, the Vares Project Exploration Manager, and Head of Exploration. Significant intercepts are visually verified daily as core is brought in for logging, included in summary logs, and then cross-checked during detailed logging.
	<i>The use of twinned holes.</i>	None of the reported holes are twin holes. Holes completed are part of tight 'drill fans' with separation of holes between fans of 25m to 30m with respect to targeted ore zones. Separation distances are <25m between holes closer to surface. Several holes although not planned as twin holes, being drilled from adjacent drill platforms, have passed through the trace of previous holes and replicated mineralisation. Confirming position, grade and thickness.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	Data is stored in a Cloud Server with server back-ups at various locations including Vares, Bosnia & Herzegovina and Cheltenham, UK. The data and databases is managed by consultants gDat Data Solutions in an acQuire database. The acQuire database is regularly backed-up.
	<i>Discuss any adjustment to assay data.</i>	No adjustments were necessary.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	Sampling sites were surveyed using Total Station to better than 0.05m accuracy in the local BiH coordinate system.
	<i>Specification of the grid system used.</i>	The grid system used MGI 1901 / Balkans Zone 6.
	<i>Quality and adequacy of topographic control.</i>	The topographic surface of the immediate area was generated from a LiDAR survey to an accuracy of approximately 0.05m. It is considered sufficiently accurate for the Company's current activities. All drill collars have been compared to the LiDAR surface and physically validated where discrepancies in elevation or position where noted. Validation has been periodically



Section 1 Sampling Techniques and Data
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
		required in mountainous terrain where holes post-date LiDAR and earthworks have been completed to establish drill pads.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i>	Drill hole spacing does not exceed 50m which is considered acceptable for reporting exploration results. The nominal drill spacing is on 40m spaced sections. The primary method of drilling is to complete holes from a single drill platform in mountainous terrain. Holes are drilled as part of a 'fan' of holes. Design of holes aims to achieve a nominal 25m to 30m separation between mineralised zones to achieve either an Inferred or Indicated level of exploration confidence. No MRE has yet been completed for Rupice NW.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	Drill hole spacing is deemed sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource classification to be applied. The data spacing is suitable for a stratabound, continuous style of polymetallic mineralisation with minimal structural disturbance or remobilisation.
	<i>Whether sample compositing has been applied.</i>	Sample compositing was not applied. Currently reported results are on a nominal 1m spacing unless samples have been character sampled or extended to visual contacts. Minimum sample size is 0.2m and maximum is 1.2m.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	Drill holes have been drilled at between 55-90° to the mineralised body. The mineralised body generally shallow dipping to the NE and plunging to the NW at angles of 30 to 40 degrees. Current drilling intersects mineralisation at generally a high oblique angle.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	The drilling orientation has not introduced a sampling bias, as the drilling is at a high angle to the mineralised body (oblique).
Sample security	<i>The measures taken to ensure sample security.</i>	Chain of Custody of digital data is managed by the Company. Physical material was stored on site and, when necessary, delivered to the assay laboratory. Thereafter laboratory samples were controlled by the nominated laboratory. All sample collection was controlled by digital sample control file(s) and hard-copy ticket books. Transfer of samples from Vares to Ankara is by a dedicated enclosed commercial truck. No other freight is included with shipments. Weigh-bills are used as are multiple customs declarations. Dispatched samples have sample tickets included, are referenced to a pre-dispatch sample submission sheet, and are cross-checked on receipt at laboratory. To date no discrepancies, sample loss or tampering with samples has been recorded.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	Laboratory audits of SGS Ankara, Turkey, sample preparation and analysis facilities was made by-Sergei Smolonogov, Head of Exploration of Adriatic Metals, in October 2022. There were no material issues found for the 2022 drill programme. Areas for laboratory improvement were noted but were not considered material to sample QAQC outcomes at this time.

Section 2 Reporting of Exploration Results
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	The Rupice deposit is located within the Company's 100% owned Concession, No. 04-18-21389-1/13, located 13km west of Vares in Bosnia. There are no known material issues with any third party other than royalties due to the State.
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	The Concession is in good standing with the governing authority and there is no known impediment to the Concession remaining in force until 2038 (25 years), subject to meeting all necessary reporting requirements.



Section 1 Sampling Techniques and Data
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	Modern exploration commenced with the work of Energoinvest in the late 1960s. During 1968-1969 underground development of 455m of drives and cross cuts were made, and 11 surface trenches dug for a total length of 93.5m. Between 1980 and 1989, 49 holes were drilled for an advance of 5,690.8m. Sample material from all of these programs was routinely analysed for lead, zinc, and barite, and on occasion silver and gold. The deposit was the subject of a number of reserve estimates in the 1980s. This work is documented in many reports which are certified by those geoscientists and Institutes that undertook the work. The work is considered to be of a standard equal to that found within today's exploration industry.
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	The host rocks at Rupice comprise Middle Triassic limestone, dolostone, calcareous and dolomitic marl, and a range of mostly fine-grained siliciclastic rocks including cherty mudstone, mudstone, siltstone and fine-grained sandstone. The main mineralised horizon is a brecciated dolomitic unit that dips at around 50° to the northeast and has been preferentially mineralised with base, precious and transitional metals. The Triassic and Jurassic sequences have been deformed by early-stage ductile shearing and late stage brittle faulting. The Rupice polymetallic mineralisation consists of sphalerite, galena, barite and chalcopryrite with gold, silver, tetrahedrite, boulangerite and bournonite, with pyrite. The majority of the high-grade mineralisation is hosted within a brecciated dolomitic unit, which is interpreted to be cross-cut by northwest striking, westerly dipping syn-post mineral faulting. This faulting is interpreted to displace the mineralised body. Thickening of the central portion of the orebody occurs in an area of structural complexity. Mineralised widths of up to 65m true thickness are seen in the central portion of the orebody. To date, the massive sulphide mineralisation at Rupice has a defined strike length of 650m, with an average true-width thickness of around 20m. However, recent drilling northwest of Rupice has intercepted a massive sulphide body referred to as Rupice NW. Rupice NW is yet not connected by drilling to Rupice mineralisation across an approximate strike gap of 90m. Rupice NW currently has a strike extent of approximately 250m with mineralisation remaining open in all directions. The Rupice NW mineralisation appears not impacted by deformation at the scale of drilling and compared to Rupice is a continuous tabular stratabound mineralized body. Multiple mineralized intercepts at Rupice NW have true thicknesses of over 40m along the centre axis of mineralization. Mineralisation away from the central NW-SE strike axis tapers away at the margins to <1.<0.01m true thickness. This can be 60m to 80m away and either side from the strike axis centre line. The up-dip and down-dip extents of Rupice NW have not as yet been closed-off, therefore a true SW-NE width of mineralisation cannot be stated. The strike extent is similarly open. To the NW, the Rupice NW mineralisation appears to be thickening and widening on the last sections drilled. To the SE and closest to Rupice, mineralisation is still continuous, and has a thickness of up to 20m. There is a distance of only 90m to connect Rupice NW along strike to Rupice. Rupice NW mineralisation is strongly associated with barite forming matrix to sulphides. Barite can be up 80% of mineralised zones. Galena, sphalerite, pyrite and chalcopryrite are the most visible and identifiable sulphides during logging. The footwall zone below massive and semi-massive sulphides is pervasively silica -sericite altered with fine disseminated sulphides throughout and crosscut by base metal stringer zones and mineralized faults / shears. This alteration zone can extend 20m to 30m below massive and semi-massive sulphides. Overall, the footwall zone appears enriched in zinc. On the hangingwall of Rupice NW there is a pyrite rich, low barite, high base metal content horizon of mineralisation referred to as the Upper Zone. It is approximately 90m to 100m vertically above Rupice NW. It appears to be a mineralized zone occurring as matrix within a dolomite / limestone breccia. The mineralised Upper Zone marks the transition from Jurassic into mineralised Triassic sediments and generally occurs at the base of a major thrust zone.



Section 1 Sampling Techniques and Data
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
Drill hole information	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> - o <i>easting and northing of the drill hole collar</i> - o <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> - o <i>dip and azimuth of the hole</i> - o <i>downhole length and interception depth</i> - o <i>hole length.</i> <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	Drilling data for the reported drill holes is included in Tables 1-3 of Appendix 1.
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i>	Significant intercepts were calculated by applying a lower cut-off grade of 50g/t AgEq (<i>see notes in Table 1 for assumptions for AgEq & ZnEq calculations</i>), Grade recoveries of 90% and commodity prices as used for the Rupice updated MRE from 2020 were applied, since no metallurgical test work has been conducted on the Rupice Northwest extension area. 1m minimum interval and maximum internal dilution of 5m. A top-cut was not applied. Significant intercepts were reported as weighted averages.
	<i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i>	Short lengths of significant high-grade results were defined as > 600 g/t AgEq, having a minimum 1m interval and maximum internal dilution of 5m. Results are shown in Table 1 of the main reporting document.
	<i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	Equivalent explanations are described in the body of the text.
Relationship between mineralisation widths and intercept lengths	<i>These relationships are particularly important in the reporting of Exploration Results.</i>	Only downhole interval lengths are reported.
	<i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i>	The majority of the high-grade Rupice mineralisation is hosted within a brecciated dolomitic unit, which is cross-cut by northwest striking, westerly dipping syn-post mineral faulting. This faulting is interpreted to displace the mineralised body. Evidence of displacement is not yet apparent or confirmed. Thickening of the central portion of the orebody occurs in an area of interpreted local folding and deformation. Mineralised widths up to 65m true thickness are seen in the central portion of the orebody. To date, the massive sulphide mineralisation at Rupice has a defined strike length of 650m with an average true-width thickness of around 20m. However, mineralisation at Rupice still remains open along strike to the NW, SE, up-dip and down-dip. Recent drilling by Eastern Mining was mostly inclined at between -55° and -67° to the southwest, perpendicular to the deposit strike, and intersected the mineralisation reasonably orthogonally. Similarly for Rupice NW. Drilling at 55 to 90 degrees has intersected mineralisation at a high angle to mineralisation dipping to the NE and plunging to the NW from 30 to 40 degrees.
	<i>If it is not known and only the downhole lengths are reported, there should be a clear statement</i>	Only downhole lengths are reported.



Section 1 Sampling Techniques and Data
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
	<i>to this effect (e.g. 'downhole length, true width not known').</i>	
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Relevant maps and diagrams are included in the body of the report.
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high-grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	All assay tables for all reported holes are included in the main reporting document.
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	No substantive exploration data not already mentioned in the announcement or in this table have been used.
Further work	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	Further drilling will be undertaken in 2023 for mineralisation along strike, and up and down dip. dependent on exploration success and funding. Adriatic Metals has committed to fully defining Rupice NW within its exploration tenement to complete an updated Rupice MRE and Maiden Rupice NW MRE. Drilling will be on a 40m section spacing, with mineralization pierce points nominally 25m to 30m between hole intercepts. Fan drilling from a single drill platform per section will be used to intersect the majority of holes per section. Additional drill platforms will be constructed where a single fan cannot fully drill out a section. Specific focus will be placed on resolving whether Rupice NW can be connected to the main body of Rupice mineralisation across a 90m drilling gap. Diagrams showing areas of open mineralisation and opportunity are part of the main body of the public announcement.