

16 August 2023

ABOUT ADRIATIC METALS (ASX:ADT, LSE:ADT1, OTCQX:ADMLF)

Adriatic Metals Plc is focused on the development of the 100%-owned, Vares high-grade silver project in Bosnia & Herzegovina, and exploration at the Raska base & precious metals project in Serbia.

DIRECTORS

Mr Michael Rawlinson
NON-EXECUTIVE CHAIRMAN

Mr Paul Cronin
MANAGING DIRECTOR & CEO

Mr Peter Bilbe
NON-EXECUTIVE DIRECTOR

Mr Julian Barnes
NON-EXECUTIVE DIRECTOR

Ms Sandra Bates
NON-EXECUTIVE DIRECTOR

Ms Sanela Karic
NON-EXECUTIVE DIRECTOR

adriaticmetals.com

RUPICE NORTHWEST EXPLORATION GROWTH CONTINUES

HIGHLIGHTS

- Rupice Northwest ('RNW') exploration drilling continues to deliver high grade Ag-Zn-Pb-Au-Cu extensions to mineralization to the west of the July 2023 Rupice Mineral Resource Estimate ('MRE').
- Faulting and folding at the western extent of RNW have created a vertical strike-continuous domain of thickened high-grade mineralization opening-up new mining opportunities.
- RNW step-out drilling to the west keeps delivering wide significant widths e.g., **33.4m @ 1,197g/t AgEq or 38.5% ZnEq** including **409g/t Ag, 11.7% Zn, 8.9% Pb, 2.6g/t Au, 1.2% Cu, 9% BaSO₄, 0.2% Sb** in hole BR-30-23.
- RNW extension of the Main Zone of mineralization reporting: **15.2m @ 1,502g/t AgEq, 48.3% ZnEq** (499g/t Ag, 7.7% Zn, 13.9% Pb, 4.2g/t Au, 2.2% Cu, 24.6% BaSO₄, 0.3% Sb) in hole BR-36-23 –
 - including **9.2m @ 2,269g/t AgEq, 73% ZnEq** (800g/t Ag, 11.6% Zn, 21.3% Pb, 6.7g/t Au, 2.7% Cu, 25.9% BaSO₄, 0.4% Sb).
- RNW exploration step-out and resource infill drilling continues with two diamond drill rigs to end of September. A further resource update capturing the new growth and conversion of Inferred resources to Indicated status is planned for Q4 2023.
- Exploration target definition drilling in 2023 will continue at Semizova Ponikva and Droskovac-Brezik and assays are pending following drilling at Rupice West.



Paul Cronin, Adriatic's Managing Director and CEO, commented:

"Additional exploration drilling, new geology, more tonnes at higher grades to the west of the current Rupice Northwest resource are adding significantly to the growth of Rupice. Faulting and folding have thickened and bent mineralization to vertical, with silver-gold-copper grades increasing in proximity to the deformation. Drilling will continue to define the western extent of RNW for a further resource update at the end of 2023.

Regionally, exploration drilling is testing the Semizova Ponikva prospect and will then move to drill test the Droskovac-Brezik prospect. Drilling on Rupice West was completed in July, with the discovery of a high-grade zinc oxide, with assay results still pending.

Our most recent capital raise will enable us to expand and accelerate our exploration programme and continue this exploration through 2024. With this level of ongoing success, Adriatic continues to fully unlock the potential of the Rupice Mine and the Vares Project as well as prospective regional targets."

Presented below are select significant assay results from 7 of 10 RNW exploration drill holes completed since the July 2023 Exploration Update and subsequent July 2023 Rupice MRE Announcement. Three drill holes (BR-31-23, BR-31A-23 and BR-33-23) were abandoned and redrilled due to ground conditions and hole deviation. The presented assay results are in addition to previous results announced for RNW on 18 July 2023 and are not included in the Rupice MRE announced on 27 July 2023. Details of all 10 holes are appended.

Drillhole Highlights

RNW Extension (New Mineralization)

Drillhole **BR-30-23** is located 115.0m northwest of the Rupice Mineral Resource ('RMR') and drilled up-dip of the previously reported hole BR-27-23 (15.8m @ 1,486g/t AgEq, 47.8% ZnEq). Drilling intercepted:

- **BR-30-23 (RNW Upper Zone) – 6.8m @ 242g/t AgEq, 7.8% ZnEq** (95.2g/t Ag, 2.2% Zn, 0.7% Pb, 0.5g/t Au, 0.1% Cu, 14% BaSO₄, 0.2% Sb) from 116.7m.
- **BR-30-23 (RNW Main Zone) – 33.4m @ 1,197g/t AgEq, 38.5% ZnEq** (408.7g/t Ag, 11.7% Zn, 8.9% Pb, 2.6g/t Au, 1.2% Cu, 9.0% BaSO₄, 0.2% Sb) from 218.5m –
 - including **11.7m @ 2,131g/t AgEq, 68.5% ZnEq** (610g/t Ag, 22.8% Zn, 18% Pb, 5g/t Au, 1.9% Cu, 17.1% BaSO₄, 0.2% Sb) from 219.3m.

Drillhole **BR-34-23** is located within the GAP area, 55m northwest of the RMR and drilled up-dip of previously reported hole BR-19-23 (8.3m @ 1,446g/t AgEq, 45.5% ZnEq). The drill hole intercepted:

- **BR-34-23 (RNW Main Zone) – 3.1m @ 530g/t AgEq, 17.0% ZnEq** (135g/t Ag, 3.7% Zn, 3.4% Pb, 1.1g/t Au, 0.2% Cu, 51.2% BaSO₄, 0.6% Sb) from 123.9m.

Drillhole **BR-36-23** is located 130m northwest of the RMR and drilled up-dip of previously reported hole BR-16-23 (8.2m @ 528g/t AgEq, 17% ZnEq). The drill hole intercepted:

- **BR-36-23 (RNW Main Zone) – 15.2m @ 1,502g/t AgEq, 48.3% ZnEq** (499g/t Ag, 7.7% Zn, 13.9% Pb, 4.2g/t Au, 2.2% Cu, 25% BaSO₄, 0.3% Sb) from 162.8m –
 - including **9.2m @ 2,269g/t AgEq, 73% ZnEq** (800g/t Ag, 11.6% Zn, 21.3% Pb, 6.7g/t Au, 2.7% Cu, 26% BaSO₄, 0.4% Sb) from 164.6m.



RNW Lower Zone - Extension (New Mineralization)

Drillhole **BR-30-23** is located 115m northwest of the Rupice Mineral Reserve ('RMR') and drilled up-dip of previously reported hole BR-27-23 (15.9m @ 682g/t AgEq, 22% ZnEq). The drill hole intercepted:

- **BR-30-23 (RNW Lower Zone) – 7.7m @ 596g/t AgEq, 19.2% ZnEq** (170.8g/t Ag, 2.1% Zn, 6.2% Pb, 2.9g/t Au, 0.4% Cu, <1.0% BaSO₄, 0.1% Sb) from 257.3m.

Drillhole **BR-34-23** is located within the GAP area, 55m northwest of the RMR and drilled up-dip of previously reported hole BR-19-23 (8.3m @ 1,446g/t AgEq, 45.5% ZnEq). The drill hole intercepted:

- **BR-34-23 (RNW Lower Zone) – 4.5m @ 745g/t AgEq, 23.9% ZnEq** (340g/t Ag, 0.9% Zn, 1.9% Pb, 3g/t Au, 0.9% Cu, 37.3% BaSO₄, 0.4% Sb) from 200.7m.

RNW - Infill (Resource Definition)

Drillhole **BR-31B-23** is located 155m northwest of the RMR. Drilling infilled between previously reported drill holes BR-22-23 (36.8m @ 1,890g/t AgEq, 60.8% ZnEq) and BR-14-23 (5.4m @ 841g/t AgEq, 27% ZnEq) respectively. Drilling intercepted:

- **BR-31B-23 (RNW Main Zone) – 8.6m @ 2,038g/t AgEq, 65.1% ZnEq** (546g/t Ag, 21.9% Zn, 17.6% Pb, 3.1g/t Au, 3.5% Cu, 9.7% BaSO₄, 0.4% Sb) from 205.8m –
 - including **6.3m @ 2,572g/t AgEq, 82.7% ZnEq** (714g/t Ag, 28.5% Zn, 23.1% Pb, 4.1g/t Au, 3.6% Cu, 12.4% BaSO₄, 0.5% Sb) from 205.8m
- **BR-31B-23 (RNW Main Zone) – 48.3m @ 833g/t AgEq, 27.8% ZnEq** (255g/t Ag, 7.6% Zn, 5.1% Pb, 1.7g/t Au, 1.8% Cu, 1.0% BaSO₄, 0.2% Sb) from 225.5m –
 - including **9.9m @ 2,257g/t AgEq, 72.6% ZnEq** (825g/t Ag, 18.4% Zn, 12.6% Pb, 6.7g/t Au, 2.9% Cu, <1.0% BaSO₄, 0.3% Sb) from 251m.

Drillhole **BR-32-23** is located 280m northwest of the RMR. Drilling infilled between previously reported drill holes BR-11-22 (45.6m @ 464g/t AgEq, 14.9% ZnEq) and BR-08-22 (41m @ 520 g/t AgEq, 17% ZnEq) respectively. Drilling intercepted:

- **BR-32-23 (RNW Upper Zone) – 2.3m @ 142g/t AgEq, 4.6% ZnEq** (30.4g/t Ag, 1.8% Zn, 0.7% Pb, 0.3g/t Au, 0.04% Cu, 10.9% BaSO₄, 0.1% Sb) from 204.2m.
- **BR-32-23 (RNW Upper Zone) – 6.1m @ 283g/t AgEq, 9.1% ZnEq** (104g/t Ag, 3.4% Zn, 1.4% Pb, 0.0g/t Au, 0.0% Cu, 22.0% BaSO₄, 0.3% Sb) from 258.7m.
- **BR-32-23 (RNW Upper Zone) – 9.6m @ 108g/t AgEq, 3.5% ZnEq** (43.4g/t Ag, 1.4% Zn, 0.5% Pb, 0.3g/t Au, 0.0% Cu, 11% BaSO₄, 0.1% Sb) from 204.2m.
- **BR-32-23 (RNW Main Zone) – 41.5m @ 632g/t AgEq, 20.3% ZnEq** (150g/t Ag, 5.4% Zn, 6.4% Pb, 0.6g/t Au, 0.7% Cu, 52.4% BaSO₄, 0.3% Sb) from 304m –
 - including **7.4m @ 1,666g/t AgEq, 53.6% ZnEq** (514g/t Ag, 8.8% Zn, 25.1% Pb, 1.2g/t Au, 2.6% Cu, 25.6% BaSO₄, 1.1% Sb) from 327.9m

Drillhole **BR-33A-23** is located 115m northwest of the RMR. Drilling infilled between previously reported drill holes BR-27-23 (15.8m @ 1,486g/t AgEq, 47.8% ZnEq) and BR-09-22 (11.8m @ 1,212g/t AgEq, 39% ZnEq) respectively. Drilling intercepted:

- **BR-33A-23 (RNW Upper Zone) – 4m @ 557g/t AgEq, 18.2% ZnEq** (267g/t Ag, 0.6% Zn, 3.5% Pb, 1.9g/t Au, 0.4% Cu, 25.6% BaSO₄, 0.3% Sb) from 113.4m.
- **BR-33A-23 (RNW Main Zone) – 19.4m @ 1,361g/t AgEq, 43.8% ZnEq** (557g/t Ag, 10.6% Zn, 6.6% Pb, 3.5g/t Au, 1.3% Cu, 25.0% BaSO₄, 0.3% Sb) from 205.1m



- including **11m @ 2,271g/t AgEq, 73% ZnEq** (972g/t Ag, 17% Zn, 11.3% Pb, 6g/t Au, 1.9% Cu, 40% BaSO₄, 0.4% Sb) from 205.5m.

Drillhole **BR-35-23** is located 115m northwest of the RMR. Drilling infilled between currently and previously reported drill holes BR-33A-23 (19.4m @ 1,361g/t AgEq, 43.8% ZnEq) and BR-09-22 (11.8m @ 1,212g/t AgEq, 39% ZnEq) respectively. Drilling intercepted:

- **BR-35-23 (RNW Main Zone) – 17.7m @ 1,612g/t AgEq, 51.8% ZnEq** (317g/t Ag, 24.9% Zn, 12.5% Pb, 2.2g/t Au, 1.9% Cu, 24.3% BaSO₄, 0.2% Sb) from 206.5m –
 - including **6.5m @ 1,593g/t AgEq, 51.2% ZnEq** (477g/t Ag, 20.7% Zn, 10.3% Pb, 2.9g/t Au, 0.8% Cu, 41.5% BaSO₄, 0.1% Sb) from 206.5m;
 - including **9.1m @ 1,907g/t AgEq, 61.3% ZnEq** (266g/t Ag, 32.4% Zn, 16.5% Pb, 2g/t Au, 3% Cu, 12.2% BaSO₄, 0.2% Sb) from 213.7m.

RUPICE NORTHWEST EXPLORATION RESULTS

Adriatic Metals PLC (ASX:ADT, LSE:ADT1, OTCQX:ADMLF) ("Adriatic" or the "Company") is pleased to report on recent exploration results at the Company's flagship Vares Silver Project in Bosnia & Herzegovina.

As previously announced on the 18 July 2023, exploration drilling intersected high-grade mineralization in drill holes BR-27-23, BR-28-23 and BR-29A-23 from across RNW. These holes were located 115m to 155m northwest of the existing RMR. Subsequently, the Company has focused exploration activities on further extending and infilling RNW with continued success.

Details within this announcement are from seven (7) drilled holes BR-30-23, BR-31B-23, BR-32-23, BR-33A-23, BR-34-23, BR-35-23 and BR-36-23. Drill holes BR-31-23, BR-31A-23 and BR-33-23 are listed as abandoned and contain no significant assays. Results from new drill holes **BR-30-23, BR-31B-23, BR-32-23, BR-33A-23, BR-34-23, BR-35-23** and **BR-36-23** are detailed.

Results represent drilling from five (5) drill sections being extended westward and infill drilled between existing holes to an Indicated resource level of confidence. Multiple mineralized bodies are intersected including RNW Upper Zone, Main Zone and Lower Zone. For clarity of reporting, significant assays are reported as being 'infill' (resource definition) or 'extension' (step-out). Infill holes included BR-31B-23, BR-32-23, BR-33A-23 and BR-35-23. Extension holes include BR-30-23, BR-34-23 and BR-36-23.

Section NW5000 (RNW)

Hole **BR-32-23** was successful in infilling between holes BR-11-22 and BR-08-22, confirming the mineralization spatial and grade continuity, as well as grade tenor over a minimum 15m and maximum 30m separation between holes. Outcomes support an Indicated resource level of confidence.

Section NW4920 (RNW)

Hole **BR-31B-23** twinned hole BR-22-23, infilling between previously reported drillholes BR-22-23 and BR-14-23. The hole infilled the RNW Main Zone and confirmed that mineralization had been folded into an antiform abutting the newly identified Western Fault Zone ('WFZ'). Drilling continues on this section to extend mineralization westward and downwards from BR-31B-23 to an Indicated resource level of confidence.

Section NW4880 (RNW)

Three (3) holes were completed on this key section since the last exploration announcement. Holes **BR-30-23** (step-out), **BR-33A-23** (infill) and **BR-35-23** (infill) confirming mineralization continuity and high grade between previously drilled, widely spaced holes to an Indicated resource level of confidence. Hole BR-30-23 extended mineralization westward by 35m and was a key hole in confirming mineralization had been folded. The hole drilled through a mineralized fold hinge, passed through the mineralized WFZ and intersected the mineralized



RNW Lower Zone at depth. Infill holes BR-33A-23 and BR-35-23 closed a 55m gap in mineralization between holes BR-09-22 and BR-27-23 without loss of grade or mineralization thickness.


Section NW4840 (RNW)

BR-36-23 stepped-out 25m westward from the most western RNW mineralized intercept on this section in hole BR-16-23. The hole extended RNW, intersecting RNW Main Zone at the planned elevation. Drilling continues on this section to extend mineralization westward within the RNW Main Zone, WFZ and Lower Zone.

Section NW4800 (RNW)

This is the closest well-drilled section to the RMR and is within the area referred to as the Rupice-RNW GAP. Rupice and RNW are interpreted to overlap across this area. Hole **BR-34-23** extended the RNW Lower Zone 25m up-dip and westward of hole BR-19-23.

Figure 1: Plan view of Rupice and location of drill collars from recent drilling activity

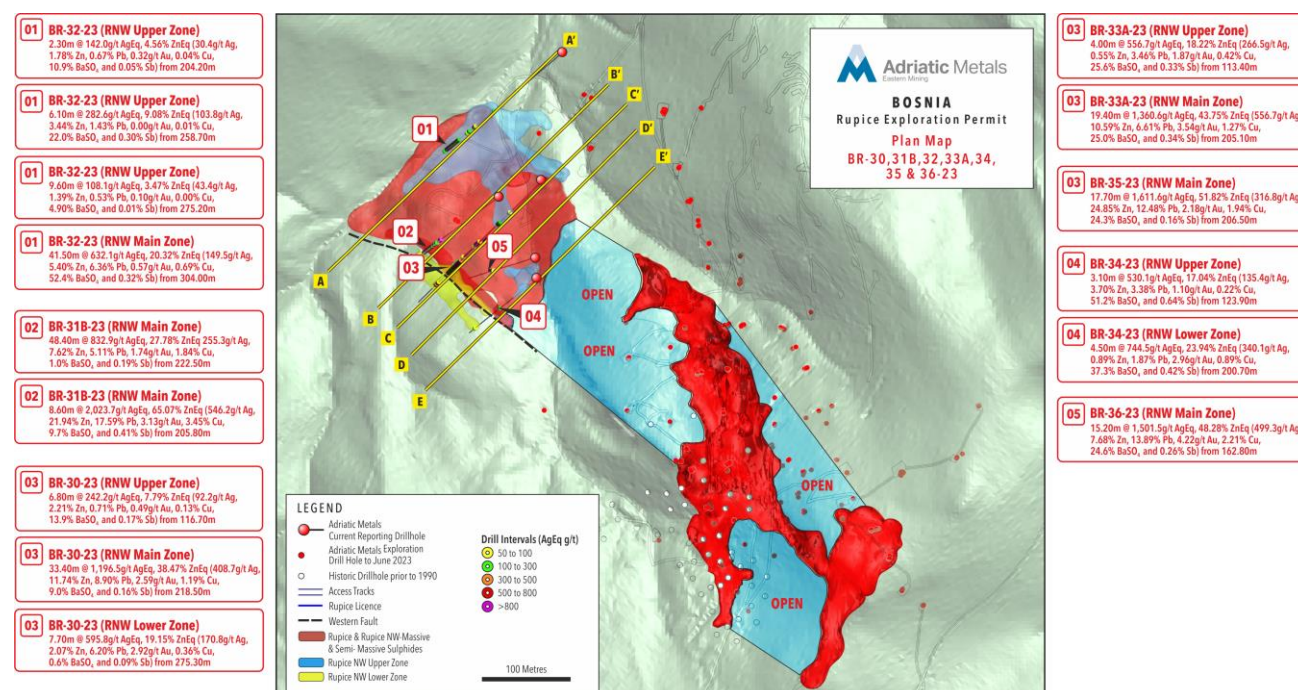

Note 1: Sections A-A', B-B', C-C', D-D' and E-E' offset to southeast of section lines to not obscure drill holes traces.

2023 Exploration Works

Currently reported assays will be included in an updated 2023 Rupice resource estimate in Q4 2023.

Drilling in Q3 2023 is focusing on completing the definition of RNW from available drilling platforms. Drilling will continue with two (2) drill rigs and include step-out and infill diamond cored holes to achieve a nominal 40m x 30m mineralized intercept spacing. Conversion of the majority of RNW mineralization to Indicated MRE status is part of the drilling strategy. Q3 2023 drilling will finish definition of high-grade mineralization associated with the WFZ, Lower Zone and Main Zone for inclusion in an optimised mine plan achieving earlier and more prolonged access to higher grade ore over a longer LOM. RNW metallurgical test work results are expected in Q3 for inclusion in the Q4 resource update.



A return to continued resource expansion of the Rupice orebody will ramp up from one (1) rig in Q3 to three (3) rigs in Q4 and potentially into 2024. Rupice remains under-drilled with potential to expand to the southeast, up and down-dip of existing reserves. Extension of the Rupice orebody to the northwest to increase the overlap between RNW and Rupice will be tested. The same disciplined and systematic drilling methodology successfully adopted at RNW will be continued across Rupice.

Knowledge of the WFZ and its high grading impact on mineralization, as well as potentially being a channel introducing Au-Cu into an already Ag-Zn-Pb-Sb-Ba rich mineralized system will be tested across Rupice.

Drilling will start across the Droskovac-Brezik prospect on completion of drill testing Semizova Ponikva in Q3. Brownfield targets along strike of the historic Droskovac underground mine and Brezik open pit will be systematically tested. Target development has benefited from the completion of the 2023 Droskovac-Brezik ground gravity survey. Geophysical anomalies line-up with soil sampling results along a trend of historic mining. The Droskovac and Brezik areas have the potential to host a Rupice size residual Ag-Zn-Pb deposit left behind after historic iron ore mining.

Figure 2: Regional geology & tenement map of current and future exploration areas

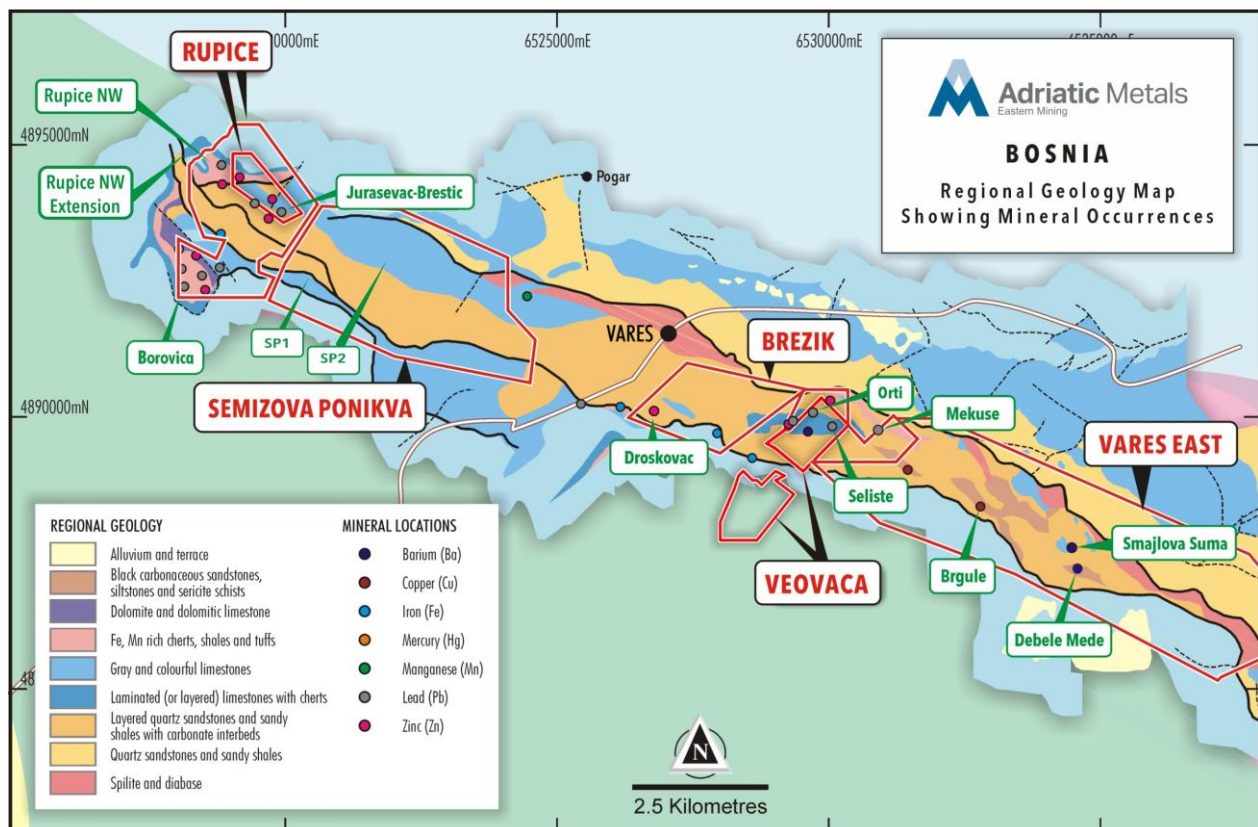




Figure 3: Cross-section (A-A') through BR-32-23

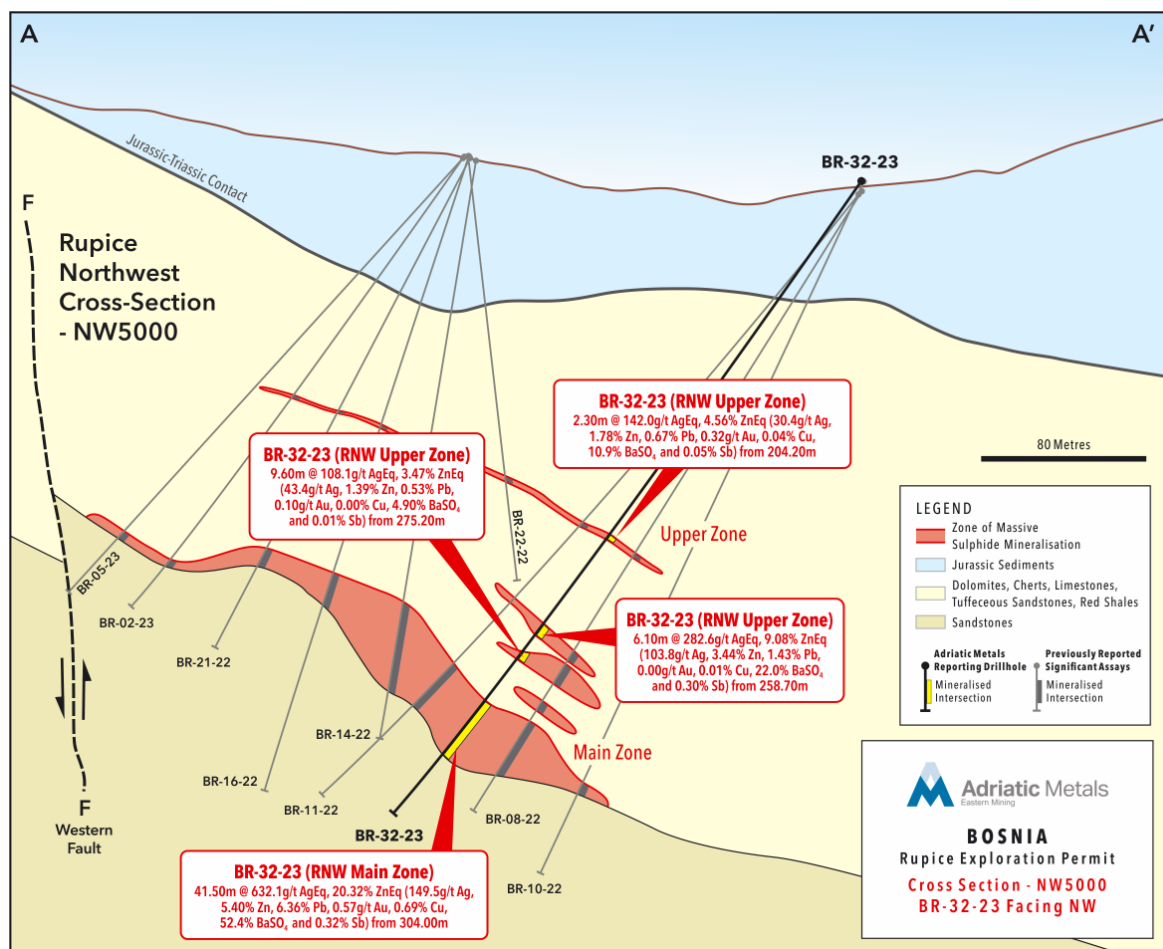




Figure 4: Cross-section (B-B') through BR-31B-23

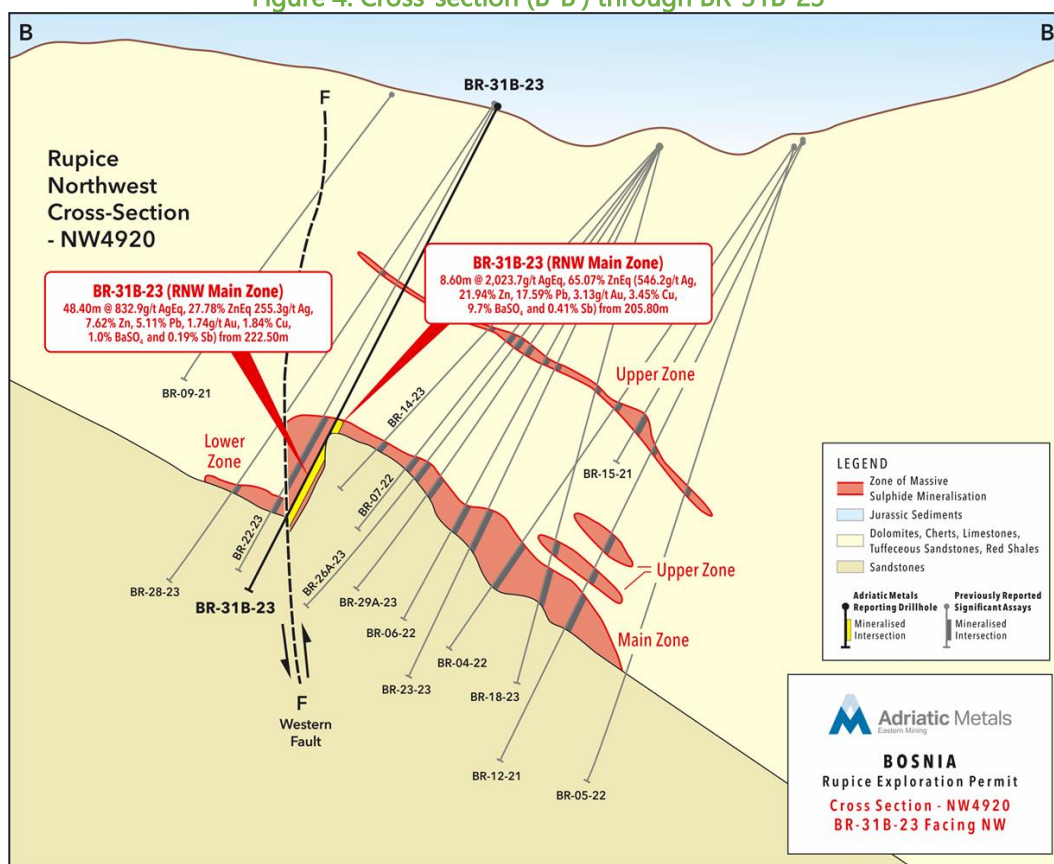


Figure 5: Cross-section (C-C') through BR-30-23, BR-33A-23 and BR-35-23

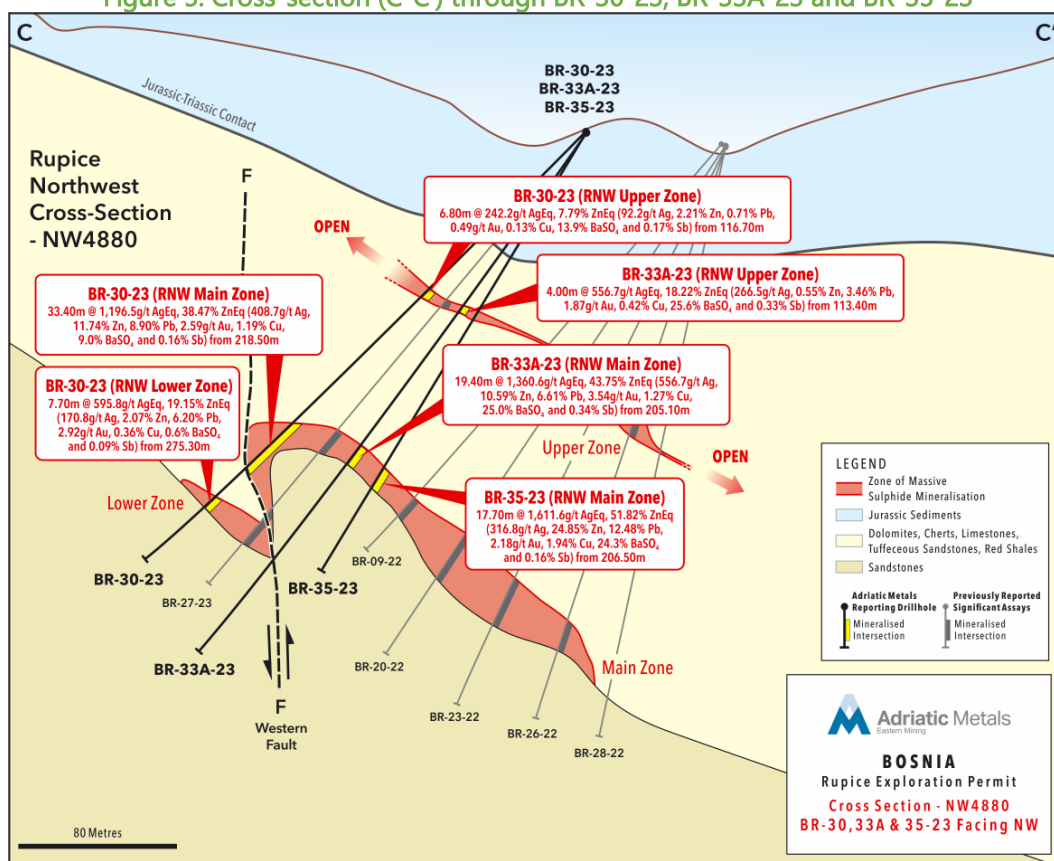




Figure 6: Cross-section (D-D') through BR-36-23

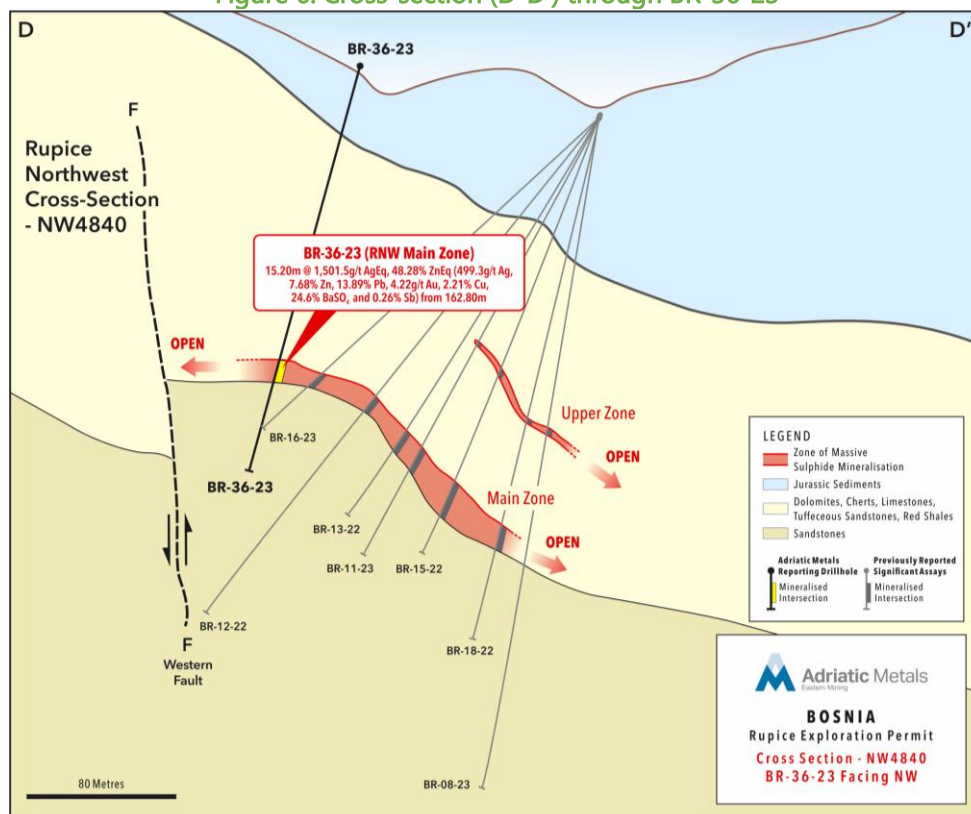


Figure 7: Cross-section (E-E') through BR-34-23


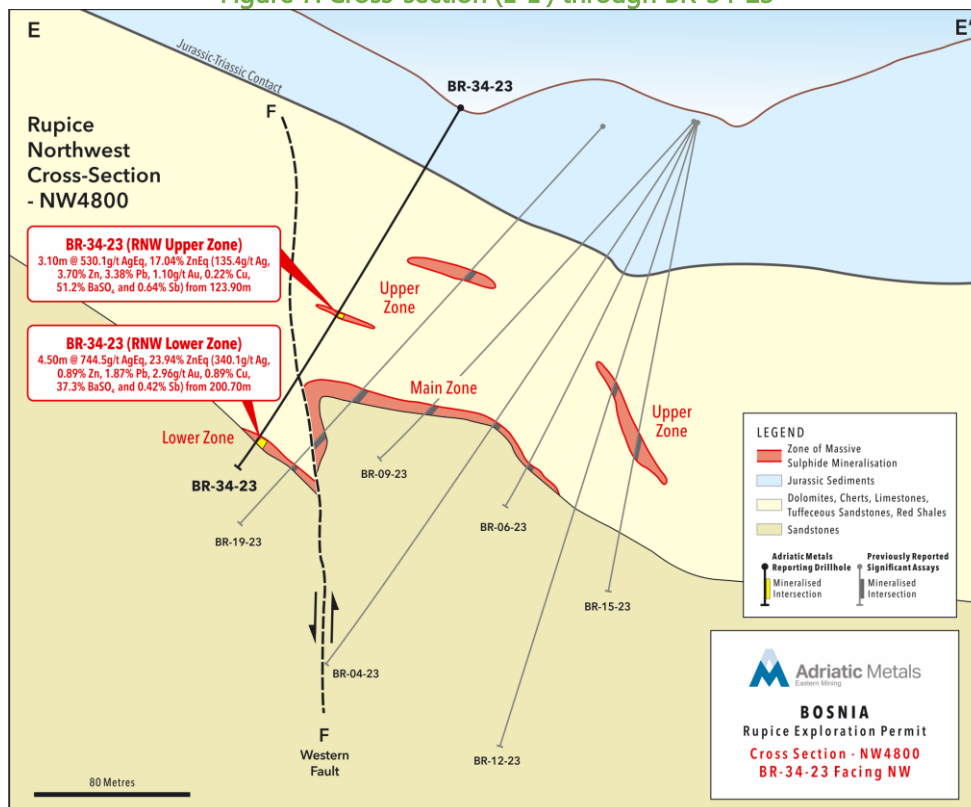




Figure 8: Long-section of Rupice looking southwest.



-ends-

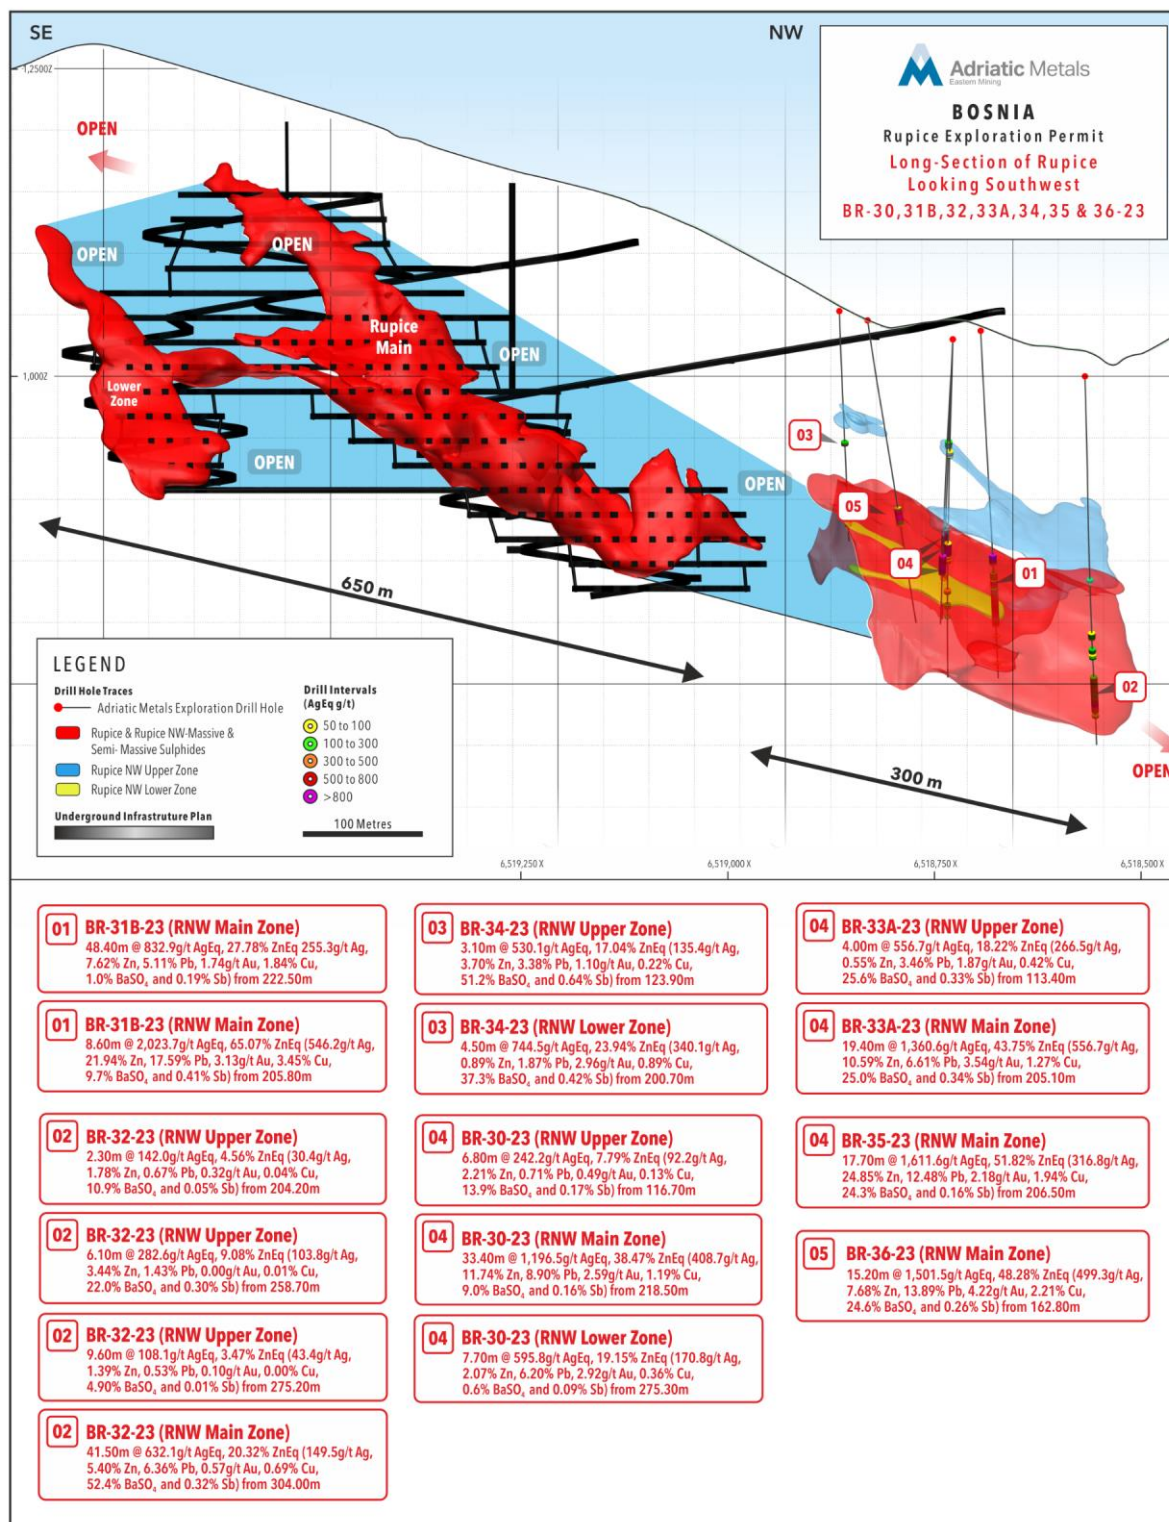

MARKET ABUSE REGULATION DISCLOSURE

The information contained within this announcement is deemed by the Company (LEI: 549300OHAH2GL1DP0L61) to constitute inside information for the purposes of Article 7 of the Market Abuse Regulation (EU) No 596/2014 as it forms part of UK domestic law by virtue of the European Union (Withdrawal) Act 2018 as amended ("UK MAR"), and Article 7 of the Market Abuse Regulation (EU) No. 596/2014 ("EU MAR"). The person responsible for arranging and authorising the release of this announcement on behalf of the Company is Paul Cronin, Managing Director and CEO.

Authorised by Paul Cronin, Managing Director & CEO

For further information please visit: www.adriaticmetals.com; email: info@adriaticmetals.com, [@AdriaticMetals](https://twitter.com/AdriaticMetals) on Twitter; or contact:

Adriatic Metals PLC

Paul Cronin / Klara Kaczmarek

Via Buchanan

Buchanan

Bobby Morse / Oonagh Reidy

Tel: +44 (0) 20 7466 5000

adriatic@buchanan.uk.com

Morgans Corporate Limited

Rob Douglas / Sam Warriner / Mitch Duffy

Tel: +61 7 3334 4888

RBC Capital Markets

James Agnew / Jamil Miah

Tel: +44 (0) 20 7653 4000

Stifel Nicolaus Europe Limited

Ashton Clanfield / Callum Stewart / Varun Talwar

Tel: +44 (0) 20 7710 7600

Citadel Magnus

Cameron Gilenko

Tel: +61 2 8234 0100

COMPETENT PERSONS REPORT

The information in this report which relates to exploration results is based on and fairly represents information and supporting documentation compiled by Mr Sergei Smolonogov, who is a member of the Australian Institute of Geoscientists (AIG). Mr Smolonogov is an employee of Adriatic Metals PLC and has sufficient experience relevant to the style of mineralization and type of deposit under consideration and to the activity he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australian Code of Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Smolonogov consents to the inclusion in this report of the matters based on that information in the form and context in which it appears.

ABOUT ADRIATIC METALS

Adriatic Metals PLC (ASX:ADT, LSE:ADT1, OTCQX:ADMLF) is a precious and base metals developer that is advancing the world-class Vares Silver Project in Bosnia & Herzegovina, as well as the Raska Zinc-Silver Project in Serbia.



The Vares Silver Project is fully funded to production, which is expected in Q4 2023. The 2021 Project Definitive Feasibility Study shows robust economics of US\$1,062 million post-tax NPV₈, 134% IRR and a capex of US\$168 million. Concurrent with ongoing construction activities, the Company continues to explore across its highly prospective 44km² concession package.

The Mineral Resource estimate for the Rupice underground deposit comprising part of the Vares Silver Project was updated in accordance with ASX Listing Rule 5.8 on 27 July 2023. The Company confirms that it is not aware of any new information or data that materially affects the information included in the previous announcement and that all material assumptions and technical parameters underpinning the estimate in the previous announcement continue to apply and have not materially changed.

The Ore Reserve estimate for the Rupice deposit comprising part of the Vares Silver Project was announced in accordance with ASX Listing Rule 5.9 on 19 August 2021. The Company confirms that it is not aware of any new information or data that materially affects the information included in the previous announcement and that all material assumptions and technical parameters underpinning the estimate in the previous announcement continue to apply and have not materially changed.

In accordance with ASX Listing Rule 5.19, the Company confirms that the production targets and forecast financial information for the Vares Project were first disclosed in accordance with ASX Listing Rules 5.16 and 5.17 in the Company's announcement dated 19 August 2021. The Company confirms that all the material assumptions underpinning the production target and the forecast financial information in the previous announcement continue to apply and have not materially changed.

DISCLAIMER

Forward-looking statements are statements that are not historical facts. Words such as "expect(s)", "feel(s)", "believe(s)", "will", "may", "anticipate(s)", "potential(s)" and similar expressions are intended to identify forward-looking statements. These statements include, but are not limited to statements regarding future production, resources or reserves and exploration results. All of such statements are subject to certain risks and uncertainties, many of which are difficult to predict and generally beyond the control of the Company, that could cause actual results to differ materially from those expressed in, or implied or projected by, the forward-looking information and statements. These risks and uncertainties include, but are not limited to: (i) those relating to the interpretation of drill results, the geology, grade and continuity of mineral deposits and conclusions of economic evaluations, (ii) risks relating to possible variations in reserves, grade, planned mining dilution and ore loss, or recovery rates and changes in project parameters as plans continue to be refined, (iii) the potential for delays in exploration or development activities or the completion of feasibility studies, (iv) risks related to commodity price and foreign exchange rate fluctuations, (v) risks related to failure to obtain adequate financing on a timely basis and on acceptable terms or delays in obtaining governmental approvals or in the completion of development or construction activities, and (vi) other risks and uncertainties related to the Company's prospects, properties and business strategy. Our audience is cautioned not to place undue reliance on these forward-looking statements that speak only as of the date hereof, and we do not undertake any obligation to revise and disseminate forward-looking statements to reflect events or circumstances after the date hereof, or to reflect the occurrence of or non-occurrence of any events.



APPENDIX 1- ASSAY TABLES

Table 1 – Rupice Northwest – Lower Zone – Extension (*Step-Out*) significant intercepts for reported drill holes

Hole ID	From	To	Interval	AgEq	ZnEq	Ag	Zn	Pb	Au	Cu	BaSO ₄	Sb
	(m)	(m)	(m)	(g/t)	(%)	(g/t)	(%)	(%)	(g/t)	(%)	(%)	(%)
BR-30-23	275.30	283.00	7.70	595.8	19.15	170.8	2.07	6.20	2.92	0.36	<1.0	0.09
BR-34-23	200.70	205.20	4.50	744.5	23.94	340.1	0.89	1.87	2.96	0.89	37.3	0.42
Notes - Significant intervals are estimated using a 50g/t AgEq cut-off, 2m minimum interval and 5m consecutive internal dilution. Higher grade intervals have a 600g/t AgEq cut off. - AgEq & ZnEq grades are based on the following metal prices used in the Rupice MRE: \$2,000/oz gold, \$25/oz silver, \$2,500/t zinc, \$2,000/t lead, \$6,500/t copper, \$150/t BaSO₄ & \$6,500/t antimony. 90% metal recovery, as per the 2020 Rupice MRE, has been applied for all metals. 100% availability was assumed for all metals. - The silver equivalent calculation is as follows: AgEq = (Au grade g/t * 72.000) + (Ag grade g/t * 0.900) + (Pb grade % * 22.395) + (Zn grade % * 27.993) + (Cu grade % * 72.782) + (BaSO₄ grade % * 1.680) + (Sb grade % * 72.782). - The zinc equivalent calculation is as follows: ZnEq = AgEq / 31.1. - It is the opinion of Adriatic Metals that all elements and products included in the metal equivalent formula have a reasonable potential to be recovered and sold.												

Table 2 – Rupice Northwest – Upper & Main Zones - Extension (*step-out*) significant intercepts for reported drill holes.

Hole ID	From	To	Interval	AgEq	ZnEq	Ag	Zn	Pb	Au	Cu	BaSO ₄	Sb
	(m)	(m)	(m)	(g/t)	(%)	(g/t)	(%)	(%)	(g/t)	(%)	(%)	(%)
BR-30-23	116.70	123.50	6.80	242.2	7.79	95.2	2.21	0.71	0.49	0.13	13.9	0.17
BR-30-23	218.50	251.90	33.40	1,196.5	38.47	408.7	11.74	8.90	2.59	1.19	9.0	0.16
<i>Including</i>	<i>219.30</i>	<i>231.00</i>	<i>11.70</i>	<i>2,131.4</i>	<i>68.53</i>	<i>610.2</i>	<i>22.80</i>	<i>17.96</i>	<i>4.99</i>	<i>1.87</i>	<i>17.1</i>	<i>0.23</i>
BR-34-23	123.90	127.00	3.10	530.1	17.04	135.4	3.70	3.38	1.10	0.22	51.2	0.64
BR-36-23	162.80	178.00	15.20	1501.5	48.28	499.3	7.68	13.89	4.22	2.21	24.6	0.26
<i>Including</i>	<i>164.60</i>	<i>173.80</i>	<i>9.20</i>	<i>2269.3</i>	<i>72.96</i>	<i>799.9</i>	<i>11.59</i>	<i>21.26</i>	<i>6.66</i>	<i>2.71</i>	<i>25.9</i>	<i>0.37</i>
Notes - Significant intervals are estimated using a 50g/t AgEq cut off, 2m minimum interval and 5 metres consecutive internal dilution. Higher grade intervals have a 600g/t AgEq cut off. - AgEq & ZnEq grades are based on the following metal prices used in the Rupice MRE: \$2,000/oz gold, \$25/oz silver, \$2,500/t zinc, \$2,000/t lead, \$6,500/t copper, \$150/t BaSO₄ & \$6,500/t antimony. 90% metal recovery, as per the Rupice MRE, has been applied for all metals. 100% availability was assumed for all metals. - The silver equivalent calculation is as follows: AgEq = (Au grade g/t * 72.000) + (Ag grade g/t * 0.900) + (Pb grade % * 22.395) + (Zn grade % * 27.993) + (Cu grade % * 72.782) + (BaSO₄ grade % * 1.680) + (Sb grade % * 72.782). - The zinc equivalent calculation is as follows: ZnEq = AgEq / 31.1. - It is the opinion of Adriatic Metals that all elements and products included in the metal equivalent formula have a reasonable potential to be recovered and sold. - BaSO₄ results capped at 84.94% for BR-34-23. Higher range BaSO₄ results are pending.												

Table 3 – Rupice Northwest - All Zones - Infill significant intercepts for reported drill holes.

Hole ID	From	To	Interval	AgEq	ZnEq	Ag	Zn	Pb	Au	Cu	BaSO ₄	Sb
	(m)	(m)	(m)	(g/t)	(%)	(g/t)	(%)	(%)	(g/t)	(%)	(%)	(%)
BR-31B-23	205.80	214.40	8.60	2,023.7	65.07	546.2	21.94	17.59	3.13	3.45	9.7	0.41
<i>Including</i>	<i>205.80</i>	<i>212.10</i>	<i>6.30</i>	<i>2,571.5</i>	<i>82.68</i>	<i>714.1</i>	<i>28.50</i>	<i>23.12</i>	<i>4.06</i>	<i>3.63</i>	<i>12.4</i>	<i>0.47</i>
BR-31B-23	225.50	270.80	48.30	832.9	27.78	255.3	7.62	5.11	1.74	1.84	1.0	0.19
<i>Including</i>	<i>251.00</i>	<i>260.90</i>	<i>9.90</i>	<i>2,256.6</i>	<i>72.56</i>	<i>824.8</i>	<i>18.35</i>	<i>12.55</i>	<i>6.74</i>	<i>2.93</i>	<i><1.0</i>	<i>0.26</i>
BR-32-23	204.20	206.50	2.30	142.0	4.56	30.4	1.78	0.67	0.32	0.04	10.9	0.05
BR-32-23	258.70	264.80	6.10	282.6	9.08	103.8	3.44	1.43	0.00	0.01	22.0	0.30
BR-32-23	275.20	284.20	9.60	108.1	3.47	43.4	1.39	0.53	0.10	0.00	4.9	0.01
BR-32-23	304.00	345.50	41.50	632.1	20.32	149.5	5.40	6.36	0.57	0.69	52.4	0.32
<i>Including</i>	<i>327.90</i>	<i>335.3</i>	<i>7.40</i>	<i>1,665.7</i>	<i>53.56</i>	<i>514.2</i>	<i>8.81</i>	<i>25.11</i>	<i>1.18</i>	<i>2.55</i>	<i>25.6</i>	<i>1.08</i>
BR-33A-23	113.40	117.40	4.00	556.7	18.22	266.5	0.55	3.46	1.87	0.42	25.6	0.33



Hole ID	From	To	Interval	AgEq	ZnEq	Ag	Zn	Pb	Au	Cu	BaSO ₄	Sb
BR-33A-23	205.10	224.50	19.40	1,360.6	43.75	556.7	10.59	6.61	3.54	1.27	25.0	0.34
Including	205.50	216.50	11.00	2,271.4	73.03	971.9	16.96	11.34	5.98	1.92	39.7	0.41
BR-35-23	206.50	224.20	17.70	1,611.6	51.82	316.8	24.85	12.48	2.18	1.94	24.3	0.16
Including	206.50	213.00	6.50	1593.2	51.22	476.6	20.69	10.34	2.94	0.84	41.5	0.14
Including	213.70	222.80	9.10	1907.3	61.32	265.5	32.37	16.46	1.97	2.97	12.2	0.19

Notes

1. Significant intervals are estimated using a 50g/t AgEq cut off, 2m minimum interval and 5 metres consecutive internal dilution. Higher grade intervals have a 600g/t AgEq cut off.
2. AgEq & ZnEq grades are based on the following metal prices used in the Rupice MRE: \$2,000/oz gold, \$25/oz silver, \$2,500/t zinc, \$2,000/t lead, \$6,500/t copper, \$150/t BaSO₄ & \$6,500/t antimony.
3. 90% metal recovery, as per the Rupice MRE, has been applied for all metals.
4. 100% availability was assumed for all metals.
5. The silver equivalent calculation is as follows: AgEq = (Au grade g/t * 72.000) + (Ag grade g/t * 0.900) + (Pb grade % * 22.395) + (Zn grade % * 27.993) + (Cu grade % * 72.782) + (BaSO₄ grade % * 1.680) + (Sb grade % * 72.782).
6. The zinc equivalent calculation is as follows: ZnEq = AgEq / 31.1.
7. It is the opinion of Adriatic Metals that all elements and products included in the metal equivalent formula have a reasonable potential to be recovered and sold.
8. BaSO₄ results capped at 84.94% for BR-32-23. Higher range BaSO₄ results are pending.

Table 3 – Collar information for reported drill holes

Hole ID	Easting (m) ¹	Northing (m) ¹	Elevation (m)	Depth (m)	Azimuth	Inclination
BR-30-23	6518969	4895093	1030	326.70	225	-44.3
BR-31-23 ²	6518909	4895067	1036	74.90	235	-66.1
BR-31A-23 ²	6518907	4895067	1036	111.40	233	-67.8
BR-31B-23	6518910	4895070	1037	320.00	233	-62.0
BR-32-23	6518995	4895262	1000	375.20	230	-53.0
BR-33-23 ²	6518969	4895094	1030	17.30	225	-54.4
BR-33A-23	6518970	4895094	1030	344.10	226	-53.0
BR-34-23	6518961	4894961	1053	221.00	231	-57.9
BR-35-23	6518970	4895094	1030	272.20	223	-58.2
BR-36-23	6518957	4894988	1045	263.30	252	-69.0

Notes

- ¹Coordinates are shown using Gauss Kruger MGI Balkan Zone 6.
- ²Abandoned drill hole due to bad ground conditions, equipment failure and or hole deviations.

Table 4 – Assay data for reported drill holes

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-30-23	0.00	79.80	79.80	Interval not sampled						
BR-30-23	79.80	81.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	81.00	82.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	82.20	83.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	83.40	84.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	84.60	85.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	85.80	87.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	87.00	88.90	1.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	88.90	90.00	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	90.00	91.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	91.00	92.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	92.00	93.40	1.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	93.40	94.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	94.40	95.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	95.60	96.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	96.80	98.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	98.00	99.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	99.00	100.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-30-23	100.00	101.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	101.00	102.00	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	102.00	103.60	1.60	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	103.60	105.00	1.40	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	105.00	106.60	1.60	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	106.60	107.70	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-30-23	107.70	109.00	1.30	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	0.01
BR-30-23	109.00	110.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-30-23	110.00	111.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-30-23	111.00	112.00	1.00	<1.0	<0.01	<0.01	0.02	0.01	<1.0	0.01
BR-30-23	112.00	112.70	0.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-30-23	112.70	114.00	1.30	<1.0	0.01	0.02	0.01	<0.01	<1.0	0.02
BR-30-23	114.00	115.60	1.60	<1.0	0.02	0.01	0.01	0.01	<1.0	0.02
BR-30-23	115.60	116.70	1.10	<1.0	0.01	0.02	0.02	0.01	<1.0	0.02
BR-30-23	116.70	117.40	0.70	195.0	2.65	1.01	0.38	0.23	<1.0	0.21
BR-30-23	117.40	118.40	1.00	42.0	0.99	0.33	0.28	0.04	<1.0	0.04
BR-30-23	118.40	119.10	0.70	48.0	1.36	0.46	0.30	0.04	<1.0	0.06
BR-30-23	119.10	120.00	0.90	116.0	2.12	0.59	0.59	0.13	19.1	0.11
BR-30-23	120.00	120.90	0.90	34.0	0.50	0.18	0.33	0.02	3.7	0.05
BR-30-23	120.90	121.50	0.60	100.0	3.61	1.21	0.47	0.10	7.1	0.2
BR-30-23	121.50	122.50	1.00	56.0	1.35	0.55	0.62	0.31	33.4	0.21
BR-30-23	122.50	123.50	1.00	164.0	5.39	1.54	0.85	0.13	35.0	0.46
BR-30-23	123.50	124.50	1.00	<1.0	0.10	0.01	0.04	<0.01	<1.0	0.01
BR-30-23	124.50	125.50	1.00	<1.0	0.04	<0.01	0.02	<0.01	<1.0	<0.01
BR-30-23	125.50	126.50	1.00	<1.0	0.02	<0.01	0.02	<0.01	<1.0	<0.01
BR-30-23	126.50	127.50	1.00	<1.0	0.09	<0.01	0.03	<0.01	<1.0	<0.01
BR-30-23	127.50	128.40	0.90	<1.0	0.08	0.01	0.03	<0.01	<1.0	0.01
BR-30-23	128.40	129.60	1.20	14.0	0.34	0.08	0.17	0.05	22.3	0.07
BR-30-23	129.60	130.50	0.90	<1.0	0.01	<0.01	0.04	<0.01	<1.0	0.01
BR-30-23	130.50	131.30	0.80	<1.0	<0.01	0.01	0.02	<0.01	<1.0	0.01
BR-30-23	131.30	132.50	1.20	<1.0	0.19	0.01	0.03	<0.01	1.1	0.01
BR-30-23	132.50	133.60	1.10	<1.0	0.28	0.02	0.02	<0.01	<1.0	0.02
BR-30-23	133.60	134.70	1.10	<1.0	0.01	<0.01	0.03	<0.01	<1.0	0.01
BR-30-23	134.70	135.80	1.10	<1.0	<0.01	<0.01	0.06	<0.01	<1.0	0.01
BR-30-23	135.80	137.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-30-23	137.00	138.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.03
BR-30-23	138.00	139.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-30-23	139.00	140.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-30-23	140.00	141.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-30-23	141.00	142.00	1.00	<1.0	0.04	0.01	0.04	<0.01	<1.0	<0.01
BR-30-23	142.00	143.10	1.10	2.0	0.03	0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	143.10	144.30	1.20	<1.0	0.14	0.06	<0.01	<0.01	<1.0	<0.01
BR-30-23	144.30	145.50	1.20	<1.0	0.05	0.01	<0.01	<0.01	<1.0	0.01
BR-30-23	145.50	146.50	1.00	<1.0	0.02	0.02	<0.01	<0.01	<1.0	<0.01
BR-30-23	146.50	147.50	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	147.50	148.50	1.00	2.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	148.50	149.70	1.20	<1.0	0.05	0.03	<0.01	<0.01	<1.0	<0.01
BR-30-23	149.70	150.80	1.10	<1.0	0.08	0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	150.80	152.00	1.20	<1.0	0.03	0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	152.00	153.00	1.00	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	153.00	154.00	1.00	<1.0	0.04	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	154.00	155.00	1.00	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	155.00	156.00	1.00	<1.0	0.04	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	156.00	157.20	1.20	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	157.20	158.40	1.20	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	158.40	159.60	1.20	<1.0	0.01	<0.01	<0.01	<0.01	1.5	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-30-23	159.60	160.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	160.80	162.00	1.20	<1.0	0.03	0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	162.00	163.00	1.00	2.0	0.11	0.02	<0.01	<0.01	<1.0	<0.01
BR-30-23	163.00	164.00	1.00	2.0	0.09	0.03	<0.01	<0.01	1.6	<0.01
BR-30-23	164.00	165.00	1.00	<1.0	0.04	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	165.00	166.20	1.20	<1.0	0.04	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	166.20	166.90	0.70	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	166.90	167.80	0.90	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	167.80	168.70	0.90	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	168.70	169.40	0.70	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	169.40	170.50	1.10	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	170.50	171.70	1.20	<1.0	0.08	0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	171.70	172.90	1.20	3.0	0.05	0.02	<0.01	<0.01	<1.0	<0.01
BR-30-23	172.90	174.00	1.10	4.0	0.22	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	174.00	175.00	1.00	5.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	175.00	176.00	1.00	2.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	176.00	177.00	1.00	7.0	0.04	0.03	0.09	0.01	<1.0	<0.01
BR-30-23	177.00	178.00	1.00	7.0	0.04	0.08	0.08	0.01	<1.0	0.01
BR-30-23	178.00	179.00	1.00	5.0	0.04	0.03	0.05	<0.01	<1.0	<0.01
BR-30-23	179.00	180.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	180.00	180.80	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	180.80	182.70	1.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	182.70	183.80	1.10	2.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	183.80	184.70	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	184.70	185.50	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	185.50	186.70	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	186.70	187.90	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	187.90	189.00	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	189.00	190.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	190.00	191.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	191.00	192.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	192.00	193.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	193.10	194.10	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	194.10	195.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	195.00	196.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	196.00	197.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	197.00	198.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	198.00	199.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	199.00	200.40	1.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	200.40	201.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	201.40	202.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	202.40	203.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	203.40	204.30	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	204.30	205.20	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	205.20	206.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	206.40	207.80	1.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	207.80	209.70	1.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	209.70	211.20	1.50	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	211.20	212.50	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	212.50	213.50	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	213.50	214.80	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	214.80	215.70	0.90	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-30-23	215.70	216.90	1.20	<1.0	<0.01	0.01	0.03	<0.01	76.4	<0.01
BR-30-23	216.90	217.80	0.90	<1.0	0.02	<0.01	<0.01	<0.01	84.2	<0.01
BR-30-23	217.80	218.50	0.70	2.0	0.02	0.01	0.01	<0.01	84.9	<0.01
BR-30-23	218.50	219.30	0.80	130.0	1.69	4.12	1.67	0.16	29.5	0.02



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-30-23	219.30	220.00	0.70	1,114.0	26.44	29.38	6.89	1.27	9.1	0.27
BR-30-23	220.00	221.00	1.00	1,404.0	27.90	16.76	3.82	1.08	14.1	0.28
BR-30-23	221.00	222.00	1.00	989.0	28.05	23.97	8.53	1.45	2.6	0.22
BR-30-23	222.00	223.00	1.00	418.0	26.49	18.62	6.99	1.30	16.5	0.10
BR-30-23	223.00	223.80	0.80	417.0	30.21	24.10	8.88	2.09	10.3	0.13
BR-30-23	223.80	224.90	1.10	103.0	2.86	1.58	2.06	0.16	82.9	0.02
BR-30-23	224.90	226.00	1.10	633.0	23.63	14.76	6.82	2.92	16.5	0.55
BR-30-23	226.00	227.00	1.00	862.0	27.40	14.99	6.06	1.13	19.7	0.25
BR-30-23	227.00	228.00	1.00	663.0	27.57	14.27	4.96	1.56	14.2	0.27
BR-30-23	228.00	228.90	0.90	200.0	11.75	6.15	2.13	1.18	6.4	0.15
BR-30-23	228.90	230.00	1.10	288.0	28.17	17.20	2.39	2.13	<1.0	0.16
BR-30-23	230.00	231.00	1.00	384.0	16.08	39.26	1.82	6.08	1.5	0.30
BR-30-23	231.00	232.00	1.00	80.0	7.79	3.53	0.37	0.37	1.3	0.04
BR-30-23	232.00	233.00	1.00	74.0	3.85	2.49	0.36	0.26	<1.0	0.03
BR-30-23	233.00	234.00	1.00	492.0	15.96	9.98	1.57	0.95	<1.0	0.23
BR-30-23	234.00	234.80	0.80	13.0	1.26	0.66	0.16	0.11	<1.0	0.01
BR-30-23	234.80	235.80	1.00	545.0	12.07	10.03	0.37	2.25	<1.0	0.47
BR-30-23	235.80	237.00	1.20	567.0	4.13	6.03	0.54	2.16	<1.0	0.36
BR-30-23	237.00	238.00	1.00	44.0	4.55	2.77	0.35	0.50	<1.0	0.09
BR-30-23	238.00	239.00	1.00	294.0	5.02	2.71	0.42	1.04	<1.0	0.25
BR-30-23	239.00	240.00	1.00	157.0	4.98	2.66	0.23	0.64	<1.0	0.09
BR-30-23	240.00	241.00	1.00	34.0	1.53	0.88	0.18	0.28	<1.0	0.03
BR-30-23	241.00	242.00	1.00	98.0	4.81	2.80	0.35	0.75	<1.0	0.16
BR-30-23	242.00	243.00	1.00	88.0	2.22	0.94	0.17	0.18	<1.0	0.04
BR-30-23	243.00	244.00	1.00	61.0	1.93	0.75	0.27	0.13	1.2	0.03
BR-30-23	244.00	245.00	1.00	104.0	2.32	0.69	0.21	0.15	11.8	0.05
BR-30-23	245.00	245.50	0.50	588.0	21.05	10.59	0.58	0.83	<1.0	0.13
BR-30-23	245.50	246.50	1.00	35.0	0.56	0.29	0.20	0.04	1.0	0.01
BR-30-23	246.50	247.50	1.00	206.0	4.71	1.40	1.68	0.63	7.7	0.14
BR-30-23	247.50	248.50	1.00	59.0	3.93	1.52	2.20	0.20	1.7	0.08
BR-30-23	248.50	249.80	1.30	96.0	1.83	0.94	0.79	0.18	<1.0	0.08
BR-30-23	249.80	250.50	0.70	1,384.0	28.33	17.13	7.20	3.40	1.3	0.33
BR-30-23	250.50	251.10	0.60	2,926.0	13.63	19.07	15.1	4.88	7.5	0.16
BR-30-23	251.10	251.90	0.80	256.0	0.99	3.43	2.21	0.80	52.5	0.03
BR-30-23	251.90	253.00	1.10	<1.0	0.01	<0.01	0.02	<0.01	84.9	<0.01
BR-30-23	253.00	254.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	84.9	<0.01
BR-30-23	254.00	255.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	84.9	<0.01
BR-30-23	255.00	256.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	84.9	<0.01
BR-30-23	256.00	257.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	84.9	<0.01
BR-30-23	257.00	257.80	0.80	<1.0	0.01	<0.01	0.02	<0.01	84.9	<0.01
BR-30-23	257.80	258.60	0.80	<1.0	0.01	<0.01	<0.01	<0.01	59.4	<0.01
BR-30-23	258.60	259.80	1.20	<1.0	<0.01	<0.01	<0.01	0.01	<1.0	<0.01
BR-30-23	259.80	261.00	1.20	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-30-23	261.00	262.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	262.00	263.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	263.00	264.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	264.10	265.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	265.00	266.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	266.00	267.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	267.00	268.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	268.00	269.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	269.00	271.30	2.30	<1.0	<0.01	<0.01	<0.01	<0.01	2.1	<0.01
BR-30-23	271.30	272.30	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	84.9	<0.01
BR-30-23	272.30	273.30	1.00	<1.0	0.01	<0.01	0.03	<0.01	84.9	<0.01
BR-30-23	273.30	274.30	1.00	<1.0	0.09	0.09	0.02	0.04	<1.0	<0.01
BR-30-23	274.30	275.30	1.00	<1.0	0.02	0.15	0.03	0.09	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-30-23	275.30	276.30	1.00	13.0	0.17	2.09	0.51	0.10	1.3	0.02
BR-30-23	276.30	277.10	0.80	276.0	1.55	18.28	7.35	0.31	<1.0	0.10
BR-30-23	277.10	278.50	1.40	220.0	1.14	14.55	10.20	0.33	<1.0	0.08
BR-30-23	278.50	279.40	0.90	7.0	0.08	0.08	0.15	<0.01	<1.0	0.01
BR-30-23	279.40	280.60	1.20	3.0	0.10	0.03	0.07	<0.01	1.1	<0.01
BR-30-23	280.60	281.70	1.10	211.0	6.46	3.50	0.68	0.36	<1.0	0.17
BR-30-23	281.70	282.30	0.60	744.0	8.66	10.50	1.12	2.31	<1.0	0.29
BR-30-23	282.30	283.00	0.70	122.0	0.70	0.64	0.28	0.30	<1.0	0.12
BR-30-23	283.00	284.00	1.00	11.0	0.30	0.08	0.02	0.01	<1.0	0.01
BR-30-23	284.00	285.00	1.00	6.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	285.00	286.00	1.00	2.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	286.00	287.00	1.00	1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	287.00	288.00	1.00	4.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	288.00	289.00	1.00	<1.0	0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-30-23	289.00	290.20	1.20	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-30-23	290.20	291.20	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-30-23	291.20	292.40	1.20	2.0	0.01	0.01	0.02	<0.01	<1.0	<0.01
BR-30-23	292.40	293.60	1.20	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-30-23	293.60	294.60	1.00	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-30-23	294.60	295.60	1.00	<1.0	<0.01	<0.01	0.06	<0.01	1.6	<0.01
BR-30-23	295.60	296.60	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	296.60	297.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-30-23	297.80	299.00	1.20	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-30-23	299.00	300.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-30-23	300.00	301.00	1.00	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-30-23	301.00	302.00	1.00	<1.0	0.05	0.04	0.02	0.01	<1.0	<0.01
BR-30-23	302.00	303.00	1.00	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-30-23	303.00	303.80	0.80	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-30-23	303.80	304.40	0.60	<1.0	0.13	0.03	0.14	<0.01	<1.0	<0.01
BR-30-23	304.40	305.20	0.80	<1.0	0.06	0.04	0.20	<0.01	<1.0	<0.01
BR-30-23	305.20	306.40	1.20	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-30-23	306.40	307.60	1.20	<1.0	<0.01	<0.01	0.10	<0.01	<1.0	<0.01
BR-30-23	307.60	308.70	1.10	<1.0	0.01	<0.01	0.07	<0.01	<1.0	<0.01
BR-30-23	308.70	309.90	1.20	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-30-23	309.90	311.00	1.10	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-30-23	311.00	312.00	1.00	<1.0	0.01	<0.01	0.05	<0.01	<1.0	<0.01
BR-30-23	312.00	313.20	1.20	<1.0	0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-30-23	313.20	314.10	0.90	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-30-23	314.10	315.30	1.20	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-30-23	315.30	316.50	1.20	<1.0	<0.01	<0.01	0.07	<0.01	<1.0	<0.01
BR-30-23	316.50	317.70	1.20	<1.0	<0.01	<0.01	0.50	<0.01	<1.0	<0.01
BR-30-23	317.70	318.80	1.10	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-30-23	318.80	319.90	1.10	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-30-23	319.90	321.10	1.20	<1.0	0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-30-23	321.10	322.00	0.90	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-30-23	322.00	323.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-30-23	323.00	324.00	1.00	<1.0	<0.01	<0.01	0.05	<0.01	<1.0	<0.01
BR-30-23	324.00	325.00	1.00	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-30-23	325.00	326.00	1.00	<1.0	0.01	<0.01	0.05	<0.01	<1.0	<0.01
BR-30-23	326.00	326.70	0.70	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-31B-23	0.00	69.80	69.80	Interval not sampled						
BR-31B-23	69.80	70.80	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-31B-23	70.80	72.20	1.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	72.20	73.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	73.40	74.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	74.60	75.90	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-31B-23	75.90	77.00	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	77.00	78.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	78.20	79.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	79.40	80.70	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	80.70	82.30	1.60	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	82.30	83.40	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	83.40	84.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	84.60	85.90	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	85.90	87.00	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	87.00	88.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	88.00	89.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	89.00	90.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	90.00	91.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	91.20	92.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	92.40	93.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	93.60	94.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	94.80	96.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	96.00	97.80	1.80	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	97.80	99.70	1.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	99.70	100.80	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	100.80	101.80	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	101.80	102.90	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	102.90	103.70	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-31B-23	103.70	105.50	1.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-31B-23	105.50	107.00	1.50	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-31B-23	107.00	109.40	2.40	<1.0	<0.01	0.03	<0.01	<0.01	<1.0	0.03
BR-31B-23	109.40	110.30	0.90	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	0.02
BR-31B-23	110.30	111.40	1.10	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	0.01
BR-31B-23	111.40	112.60	1.20	<1.0	0.01	0.12	0.05	0.02	<1.0	0.03
BR-31B-23	112.60	113.20	0.60	<1.0	0.04	0.04	<0.01	0.01	<1.0	0.03
BR-31B-23	113.20	114.20	1.00	<1.0	0.02	0.03	<0.01	<0.01	<1.0	0.03
BR-31B-23	114.20	115.20	1.00	<1.0	0.03	0.02	<0.01	<0.01	<1.0	0.02
BR-31B-23	115.20	116.70	1.50	<1.0	0.02	0.02	0.02	0.02	<1.0	0.07
BR-31B-23	116.70	117.30	0.60	<1.0	0.02	0.02	0.04	0.01	<1.0	0.02
BR-31B-23	117.30	118.20	0.90	<1.0	0.01	0.03	<0.01	0.01	1.60	0.03
BR-31B-23	118.20	119.30	1.10	2.0	0.02	0.01	0.04	<0.01	<1.0	0.01
BR-31B-23	119.30	120.40	1.10	7.0	0.06	0.02	0.04	0.02	1.50	0.05
BR-31B-23	120.40	121.60	1.20	<1.0	0.03	0.01	<0.01	<0.01	<1.0	0.06
BR-31B-23	121.60	122.80	1.20	<1.0	0.05	0.01	<0.01	<0.01	<1.0	0.07
BR-31B-23	122.80	124.00	1.20	<1.0	0.04	<0.01	0.01	<0.01	1.0	0.05
BR-31B-23	124.00	125.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-31B-23	125.00	126.00	1.00	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	0.01
BR-31B-23	126.00	127.00	1.00	<1.0	0.05	0.01	<0.01	<0.01	<1.0	0.01
BR-31B-23	127.00	128.00	1.00	<1.0	0.03	0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	128.00	129.00	1.00	<1.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	129.00	130.00	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	130.00	131.00	1.00	<1.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	131.00	132.00	1.00	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	132.00	133.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	133.00	134.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	134.00	135.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	135.00	136.00	1.00	<1.0	0.02	0.02	<0.01	<0.01	<1.0	<0.01
BR-31B-23	136.00	137.00	1.00	<1.0	0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-31B-23	137.00	138.00	1.00	<1.0	0.05	0.01	<0.01	<0.01	1.2	<0.01
BR-31B-23	138.00	139.00	1.00	3.0	0.12	0.04	<0.01	<0.01	<1.0	<0.01
BR-31B-23	139.00	140.00	1.00	<1.0	0.04	0.03	<0.01	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-31B-23	140.00	141.00	1.00	<1.0	0.03	0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	141.00	141.80	0.80	<1.0	0.04	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	141.80	142.90	1.10	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	142.90	144.00	1.10	<1.0	0.04	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	144.00	145.00	1.00	<1.0	0.04	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	145.00	146.00	1.00	<1.0	0.07	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	146.00	147.00	1.00	<1.0	0.06	0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	147.00	148.00	1.00	<1.0	0.04	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	148.00	149.00	1.00	<1.0	0.06	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	149.00	150.00	1.00	<1.0	0.06	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	150.00	150.70	0.70	<1.0	0.06	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	150.70	151.40	0.70	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	151.40	152.60	1.20	<1.0	0.03	0.01	<0.01	<0.01	3.1	<0.01
BR-31B-23	152.60	153.80	1.20	<1.0	0.04	0.03	0.04	<0.01	1.4	<0.01
BR-31B-23	153.80	154.50	0.70	<1.0	0.05	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	154.50	155.50	1.00	3.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	155.50	156.50	1.00	6.0	0.16	0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	156.50	157.50	1.00	8.0	0.16	0.06	<0.01	<0.01	<1.0	<0.01
BR-31B-23	157.50	158.60	1.10	4.0	0.09	0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	158.60	159.80	1.20	1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	159.80	161.00	1.20	4.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	161.00	162.00	1.00	2.0	<0.01	<0.01	0.03	<0.01	1.5	<0.01
BR-31B-23	162.00	163.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	163.10	164.00	0.90	16.0	0.02	0.02	<0.01	<0.01	<1.0	<0.01
BR-31B-23	164.00	164.90	0.90	14.0	0.17	0.02	<0.01	<0.01	<1.0	<0.01
BR-31B-23	164.90	166.20	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	166.20	167.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	167.40	168.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	1.0	<0.01
BR-31B-23	168.40	169.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	3.1	<0.01
BR-31B-23	169.40	170.40	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	2.4	<0.01
BR-31B-23	170.40	171.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-31B-23	171.60	172.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	172.80	173.80	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	173.80	174.90	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	174.90	176.00	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	176.00	177.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	177.00	178.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	178.00	179.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	179.10	180.20	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	180.20	181.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	181.40	182.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	182.60	183.80	1.20	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	183.80	185.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	185.00	186.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	186.00	187.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	187.00	188.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	188.00	189.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	189.20	190.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	190.40	191.70	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	191.70	193.00	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	193.00	194.50	1.50	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	194.50	196.30	1.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	196.30	198.20	1.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	198.20	200.00	1.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	200.00	202.40	2.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	202.40	203.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	6.1	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-31B-23	203.60	204.80	1.20	<1.0	0.02	0.03	0.02	0.03	12.0	<0.01
BR-31B-23	204.80	205.80	1.00	19.0	0.05	0.21	0.07	0.03	3.8	<0.01
BR-31B-23	205.80	206.30	0.50	673.0	6.91	7.17	1.98	0.36	61.1	0.14
BR-31B-23	206.30	207.00	0.70	1,002.0	34.35	25.72	5.70	2.84	1.6	0.36
BR-31B-23	207.00	208.00	1.00	769.0	32.85	29.16	4.88	3.89	2.8	0.34
BR-31B-23	208.00	209.00	1.00	583.0	27.13	35.05	2.73	5.61	1.7	0.24
BR-31B-23	209.00	210.00	1.00	379.0	34.97	25.12	3.60	2.94	10.1	0.16
BR-31B-23	210.00	210.80	0.80	980.0	25.21	16.13	5.75	2.64	24.6	0.47
BR-31B-23	210.80	211.50	0.70	1,080.0	26.14	17.69	4.42	5.13	10.4	1.64
BR-31B-23	211.50	212.10	0.60	317.0	31.13	15.77	2.90	4.32	8.3	0.66
BR-31B-23	212.10	212.60	0.50	135.0	7.10	4.38	1.26	1.95	4.7	0.18
BR-31B-23	212.60	213.60	1.00	124.0	4.84	3.15	0.62	5.48	<1.0	0.26
BR-31B-23	213.60	214.40	0.80	9.0	0.95	0.38	0.13	0.49	2.5	0.19
BR-31B-23	214.40	215.20	0.80	6.0	0.89	0.23	0.18	0.38	9.6	0.16
BR-31B-23	215.20	216.00	0.80	3.0	0.38	0.03	0.04	0.15	1.5	0.09
BR-31B-23	216.00	217.00	1.00	7.0	0.65	0.04	0.05	0.55	<1.0	0.26
BR-31B-23	217.00	217.50	0.50	3.0	0.19	0.03	0.03	<0.01	<1.0	<0.01
BR-31B-23	217.50	218.50	1.00	2.0	0.23	0.01	0.03	<0.01	<1.0	<0.01
BR-31B-23	218.50	219.40	0.90	<1.0	0.08	0.00	0.04	<0.01	<1.0	<0.01
BR-31B-23	219.40	220.10	0.70	<1.0	0.10	0.00	0.09	<0.01	<1.0	<0.01
BR-31B-23	220.10	220.80	0.70	6.0	0.15	0.22	0.09	0.06	<1.0	0.02
BR-31B-23	220.80	221.60	0.80	<1.0	0.13	0.05	0.11	<0.01	2.1	0.02
BR-31B-23	221.60	222.50	0.90	3.0	0.19	0.05	0.14	0.07	7.5	0.04
BR-31B-23	222.50	223.20	0.70	41.0	2.56	0.64	0.57	0.28	3.2	0.14
BR-31B-23	223.20	224.00	0.80	241.0	16.75	8.24	1.49	1.37	1.9	0.44
BR-31B-23	224.00	225.00	1.00	23.0	1.02	0.67	0.28	0.46	<1.0	0.22
BR-31B-23	225.00	226.00	1.00	46.0	2.28	1.86	0.35	0.58	<1.0	0.26
BR-31B-23	226.00	226.70	0.70	11.0	0.66	0.29	0.18	0.47	<1.0	0.23
BR-31B-23	226.70	227.30	0.60	146.0	12.21	5.04	0.62	3.52	<1.0	0.80
BR-31B-23	227.30	228.00	0.70	83.0	3.02	1.66	0.08	1.45	1.4	0.28
BR-31B-23	228.00	229.00	1.00	2.0	0.12	0.07	0.08	0.06	2.3	0.03
BR-31B-23	229.00	230.00	1.00	61.0	3.95	1.84	0.20	2.31	1.0	0.30
BR-31B-23	230.00	231.00	1.00	281.0	4.86	3.22	0.69	14.40	10.3	0.58
BR-31B-23	231.00	231.90	0.90	183.0	7.40	6.82	0.26	7.78	<1.0	0.17
BR-31B-23	231.90	232.90	1.00	263.0	22.75	22.06	0.20	2.45	1.10	0.11
BR-31B-23	232.90	233.80	0.90	73.0	9.96	5.35	0.36	0.79	<1.0	0.05
BR-31B-23	233.80	234.50	0.70	50.0	2.72	0.82	0.38	0.21	1.10	0.03
BR-31B-23	234.50	235.50	1.00	101.0	2.07	1.77	0.30	0.17	5.6	0.04
BR-31B-23	235.50	236.40	0.90	22.0	0.38	0.15	0.17	0.12	<1.0	0.02
BR-31B-23	236.40	237.20	0.80	39.0	2.14	0.65	0.14	0.30	<1.0	0.01
BR-31B-23	237.20	238.00	0.80	133.0	6.76	3.37	0.63	0.66	2.0	0.12
BR-31B-23	238.00	239.00	1.00	194.0	10.98	6.71	0.75	0.50	2.4	0.12
BR-31B-23	239.00	239.80	0.80	31.0	1.95	1.56	0.21	0.36	1.0	0.02
BR-31B-23	239.80	240.40	0.60	60.0	4.15	2.31	0.36	0.35	1.0	0.03
BR-31B-23	240.40	241.00	0.60	100.0	8.68	8.38	0.28	2.26	<1.0	0.10
BR-31B-23	241.00	241.60	0.60	71.0	3.10	1.69	0.29	0.87	<1.0	0.10
BR-31B-23	241.60	242.30	0.70	142.0	9.44	7.97	0.23	2.72	<1.0	0.22
BR-31B-23	242.30	243.20	0.90	31.0	2.15	0.93	0.22	0.56	<1.0	0.06
BR-31B-23	243.20	243.70	0.50	189.0	9.13	13.53	1.00	1.76	<1.0	0.30
BR-31B-23	243.70	244.60	0.90	90.0	4.09	5.09	0.46	1.13	<1.0	0.18
BR-31B-23	244.60	245.50	0.90	180.0	6.32	3.39	1.17	3.35	<1.0	0.29
BR-31B-23	245.50	246.30	0.80	109.0	2.91	1.49	0.52	1.84	<1.0	0.24
BR-31B-23	246.30	247.10	0.80	128.0	2.32	0.74	0.49	2.06	<1.0	0.35
BR-31B-23	247.10	248.00	0.90	415.0	5.64	2.29	0.58	1.88	3.1	0.38
BR-31B-23	248.00	249.00	1.00	199.0	4.20	1.75	0.53	0.90	<1.0	0.26
BR-31B-23	249.00	250.00	1.00	168.0	2.77	1.81	0.51	1.75	<1.0	0.35



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-31B-23	250.00	251.00	1.00	71.0	1.83	1.51	1.09	1.75	<1.0	0.21
BR-31B-23	251.00	252.00	1.00	293.0	14.39	11.01	2.83	3.83	<1.0	0.30
BR-31B-23	252.00	252.70	0.70	432.0	25.57	14.70	1.43	3.68	<1.0	0.44
BR-31B-23	252.70	253.40	0.70	201.0	12.11	7.49	2.23	0.97	<1.0	0.20
BR-31B-23	253.40	254.30	0.90	119.0	1.11	0.43	0.98	0.35	<1.0	0.05
BR-31B-23	254.30	255.20	0.90	197.0	5.10	3.97	1.64	0.90	<1.0	0.11
BR-31B-23	255.20	256.20	1.00	261.0	9.44	6.94	2.22	1.62	<1.0	0.12
BR-31B-23	256.20	256.80	0.60	158.0	8.77	4.81	1.52	0.56	<1.0	0.07
BR-31B-23	256.80	257.50	0.70	1,075.0	25.25	16.58	10.10	4.38	<1.0	0.20
BR-31B-23	257.50	258.40	0.90	2,257.0	32.02	23.90	14.50	4.05	<1.0	0.43
BR-31B-23	258.40	259.20	0.80	1,956.0	16.33	11.75	9.47	10.43	1.4	0.72
BR-31B-23	259.20	260.00	0.80	1,609.0	39.32	23.94	15.60	2.29	1.6	0.28
BR-31B-23	260.00	260.90	0.90	1,282.0	32.89	24.75	17.50	2.20	<1.0	0.22
BR-31B-23	260.90	262.00	1.10	81.0	3.24	2.31	1.06	0.16	<1.0	0.01
BR-31B-23	262.00	263.20	1.20	50.0	2.13	0.60	0.26	0.05	<1.0	<0.01
BR-31B-23	263.20	264.40	1.20	40.0	1.70	0.50	0.12	0.03	<1.0	<0.01
BR-31B-23	264.40	265.05	0.65	69.0	0.76	0.63	0.80	0.05	<1.0	0.02
BR-31B-23	265.05	265.55	0.50	57.0	0.74	0.15	0.45	0.14	<1.0	0.05
BR-31B-23	265.55	266.00	0.45	109.0	4.89	2.31	0.32	0.43	<1.0	0.06
BR-31B-23	266.00	267.00	1.00	67.0	1.93	0.96	0.16	1.56	<1.0	0.07
BR-31B-23	267.00	268.00	1.00	90.0	6.67	4.30	0.49	0.99	<1.0	0.06
BR-31B-23	268.00	268.80	0.80	323.0	18.04	9.84	1.00	2.88	<1.0	0.25
BR-31B-23	268.80	269.60	0.80	28.0	1.39	0.63	0.28	0.89	<1.0	0.05
BR-31B-23	269.60	270.80	1.20	10.0	1.10	0.63	0.17	0.23	<1.0	0.02
BR-31B-23	270.80	271.80	1.00	2.0	0.11	0.06	0.04	0.05	<1.0	0.01
BR-31B-23	271.80	272.80	1.00	<1.0	0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-31B-23	272.80	274.00	1.20	<1.0	0.02	0.02	0.03	0.01	<1.0	0.01
BR-31B-23	274.00	275.20	1.20	<1.0	0.00	0.01	0.05	<0.01	<1.0	<0.01
BR-31B-23	275.20	276.40	1.20	<1.0	0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-31B-23	276.40	277.50	1.10	<1.0	0.01	<0.01	0.05	<0.01	<1.0	<0.01
BR-31B-23	277.50	278.50	1.00	9.0	0.23	0.10	0.23	0.01	3.7	<0.01
BR-31B-23	278.50	279.20	0.70	11.0	<0.01	0.01	0.05	0.00	<1.0	0.01
BR-31B-23	279.20	280.20	1.00	<1.0	0.01	<0.01	<0.01	0.00	<1.0	0.00
BR-31B-23	280.20	281.00	0.80	41.0	0.10	0.86	0.01	0.40	<1.0	0.09
BR-31B-23	281.00	282.00	1.00	5.0	0.01	<0.01	0.02	0.04	<1.0	0.01
BR-31B-23	282.00	283.10	1.10	<1.0	0.02	<0.01	0.00	0.03	<1.0	0.01
BR-31B-23	283.10	284.30	1.20	3.0	0.02	<0.01	0.05	0.02	<1.0	<0.01
BR-31B-23	284.30	285.50	1.20	3.0	0.00	0.01	0.06	0.00	<1.0	<0.01
BR-31B-23	285.50	286.70	1.20	<1.0	0.01	<0.01	<0.01	0.03	<1.0	0.02
BR-31B-23	286.70	287.80	1.10	6.0	0.03	0.02	0.03	0.03	<1.0	0.01
BR-31B-23	287.80	289.00	1.20	3.0	0.04	0.01	0.02	0.01	<1.0	0.01
BR-31B-23	289.00	290.00	1.00	<1.0	0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-31B-23	290.00	291.20	1.20	17.0	0.98	0.55	0.06	0.02	<1.0	0.02
BR-31B-23	291.20	292.10	0.90	<1.0	0.02	0.01	0.04	<0.01	<1.0	<0.01
BR-31B-23	292.10	293.20	1.10	<1.0	0.08	0.01	0.03	<0.01	<1.0	<0.01
BR-31B-23	293.20	294.20	1.00	<1.0	0.01	<0.01	0.01	<0.01	<1.0	0.01
BR-31B-23	294.20	295.40	1.20	<1.0	0.01	<0.01	0.03	<0.01	<1.0	0.00
BR-31B-23	295.40	296.60	1.20	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	0.01
BR-31B-23	296.60	297.80	1.20	<1.0	0.04	<0.01	0.01	<0.01	<1.0	<0.01
BR-31B-23	297.80	299.00	1.20	<1.0	0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-31B-23	299.00	300.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	300.00	301.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	301.00	302.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	302.00	303.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	303.00	304.00	1.00	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-31B-23	304.00	305.00	1.00	3.0	1.14	0.31	0.10	<0.01	1.1	0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-31B-23	305.00	306.00	1.00	12.0	0.78	1.03	0.18	0.21	<1.0	0.08
BR-31B-23	306.00	307.00	1.00	7.0	0.23	0.17	0.08	0.04	<1.0	0.02
BR-31B-23	307.00	308.00	1.00	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-31B-23	308.00	309.00	1.00	<1.0	0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-31B-23	309.00	310.00	1.00	<1.0	0.07	<0.01	0.02	<0.01	<1.0	<0.01
BR-31B-23	310.00	311.00	1.00	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-31B-23	311.00	312.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-31B-23	312.00	313.00	1.00	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-31B-23	313.00	314.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-31B-23	314.00	315.00	1.00	<1.0	0.00	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	315.00	316.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	316.00	317.00	1.00	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	317.00	318.00	1.00	<1.0	0.08	<0.01	<0.01	<0.01	<1.0	<0.01
BR-31B-23	318.00	319.00	1.00	<1.0	0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-31B-23	319.00	320.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-23	0.00	151.90	151.90	Interval not sampled						
BR-32-23	151.90	153.00	1.10	<1.0	0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	153.00	154.00	1.00	<1.0	0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	154.00	155.00	1.00	<1.0	0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	155.00	156.00	1.00	<1.0	0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	156.00	157.00	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	157.00	158.00	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	158.00	159.00	1.00	<1.0	0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	159.00	160.00	1.00	<1.0	0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	160.00	161.00	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	161.00	162.00	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	162.00	163.00	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	163.00	164.00	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	164.00	165.00	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	165.00	166.00	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	166.00	167.00	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	167.00	168.00	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	168.00	169.00	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	169.00	170.00	1.00	<1.0	<0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-32-23	170.00	171.00	1.00	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-32-23	171.00	172.00	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	172.00	173.00	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	173.00	174.00	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	174.00	175.00	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	175.00	176.00	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	176.00	177.50	1.50	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	177.50	178.70	1.20	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	178.70	180.00	1.30	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	180.00	181.00	1.00	<1.0	<0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-32-23	181.00	181.90	0.90	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	181.90	183.80	1.90	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	183.80	185.60	1.80	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	185.60	186.60	1.00	<1.0	0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	186.60	187.60	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	187.60	189.30	1.70	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	189.30	190.00	0.70	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	190.00	191.00	1.00	<1.0	<0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-32-23	191.00	192.00	1.00	<1.0	0.01	0.03	<0.01	0.01	<1.0	<0.01
BR-32-23	192.00	193.20	1.20	<1.0	0.02	0.03	<0.01	0.01	<1.0	0.01
BR-32-23	193.20	194.20	1.00	<1.0	0.03	0.01	<0.01	<0.01	<1.0	0.04
BR-32-23	194.20	195.00	0.80	<1.0	0.02	0.07	<0.01	0.01	<1.0	0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-32-23	195.00	196.00	1.00	<1.0	0.03	0.04	<0.01	0.01	<1.0	0.01
BR-32-23	196.00	197.00	1.00	<1.0	0.01	0.02	0.02	0.01	<1.0	0.01
BR-32-23	197.00	198.00	1.00	<1.0	0.01	0.03	0.01	0.01	<1.0	0.01
BR-32-23	198.00	199.00	1.00	<1.0	<0.01	0.07	0.09	0.01	<1.0	0.02
BR-32-23	199.00	200.20	1.20	<1.0	<0.01	0.04	0.01	0.01	<1.0	0.02
BR-32-23	200.20	201.20	1.00	<1.0	<0.01	0.04	<0.01	0.01	<1.0	0.02
BR-32-23	201.20	202.40	1.20	<1.0	0.01	0.07	0.02	0.02	<1.0	0.03
BR-32-23	202.40	203.50	1.10	<1.0	0.11	0.19	<0.01	0.01	<1.0	0.02
BR-32-23	203.50	204.20	0.70	6.0	0.11	0.08	0.12	<0.01	<1.0	0.02
BR-32-23	204.20	205.10	0.90	28.0	1.93	0.97	0.23	0.05	7.1	0.08
BR-32-23	205.10	206.00	0.90	26.0	0.75	0.24	0.28	0.02	3.2	0.03
BR-32-23	206.00	206.50	0.50	43.0	3.40	0.89	0.59	0.06	31.6	0.06
BR-32-23	206.50	207.00	0.50	4.0	0.09	0.04	<0.01	<0.01	<1.0	0.01
BR-32-23	207.00	208.00	1.00	4.0	0.01	0.12	<0.01	<0.01	<1.0	<0.01
BR-32-23	208.00	209.00	1.00	11.0	0.04	0.69	0.01	<0.01	1.3	<0.01
BR-32-23	209.00	210.00	1.00	<1.0	0.05	0.03	<0.01	<0.01	<1.0	<0.01
BR-32-23	210.00	211.00	1.00	3.0	0.10	0.11	<0.01	<0.01	<1.0	<0.01
BR-32-23	211.00	212.00	1.00	2.0	0.05	0.06	<0.01	<0.01	<1.0	<0.01
BR-32-23	212.00	213.00	1.00	3.0	0.07	0.04	<0.01	<0.01	<1.0	<0.01
BR-32-23	213.00	214.00	1.00	4.0	0.02	0.16	<0.01	<0.01	<1.0	<0.01
BR-32-23	214.00	215.00	1.00	<1.0	0.01	0.03	<0.01	<0.01	<1.0	<0.01
BR-32-23	215.00	216.00	1.00	<1.0	0.06	0.03	<0.01	<0.01	<1.0	<0.01
BR-32-23	216.00	217.00	1.00	<1.0	0.03	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	217.00	218.00	1.00	<1.0	0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	218.00	219.00	1.00	<1.0	0.07	0.01	<0.01	<0.01	<1.0	<0.01
BR-32-23	219.00	220.00	1.00	<1.0	0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	220.00	221.00	1.00	<1.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-32-23	221.00	222.00	1.00	<1.0	<0.01	0.04	<0.01	<0.01	<1.0	<0.01
BR-32-23	222.00	223.00	1.00	<1.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-32-23	223.00	224.00	1.00	<1.0	<0.01	0.04	<0.01	<0.01	<1.0	<0.01
BR-32-23	224.00	225.00	1.00	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-32-23	225.00	226.00	1.00	<1.0	0.01	0.03	<0.01	<0.01	<1.0	<0.01
BR-32-23	226.00	227.00	1.00	<1.0	0.00	0.02	<0.01	<0.01	<1.0	<0.01
BR-32-23	227.00	228.00	1.00	<1.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-32-23	228.00	229.00	1.00	<1.0	0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	229.00	229.80	0.80	<1.0	0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	229.80	230.70	0.90	<1.0	0.03	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	230.70	231.50	0.80	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	<0.01
BR-32-23	231.50	232.30	0.80	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.01
BR-32-23	232.30	233.50	1.20	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.01
BR-32-23	233.50	234.70	1.20	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.01
BR-32-23	234.70	235.90	1.20	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.00
BR-32-23	235.90	237.00	1.10	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.01
BR-32-23	237.00	238.20	1.20	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.03
BR-32-23	238.20	238.80	0.60	<1.0	0.05	0.02	<0.01	<0.01	<1.0	0.02
BR-32-23	238.80	240.00	1.20	2.0	0.09	0.01	<0.01	<0.01	<1.0	0.01
BR-32-23	240.00	241.00	1.00	2.0	0.23	0.07	0.03	<0.01	<1.0	0.01
BR-32-23	241.00	242.00	1.00	5.0	0.25	0.06	0.06	<0.01	<1.0	<0.01
BR-32-23	242.00	243.00	1.00	11.0	0.26	0.25	0.04	0.01	<1.0	0.01
BR-32-23	243.00	244.00	1.00	1.0	0.05	0.03	0.02	<0.01	<1.0	<0.01
BR-32-23	244.00	245.20	1.20	2.0	0.14	0.06	0.02	<0.01	<1.0	<0.01
BR-32-23	245.20	246.40	1.20	2.0	0.04	0.01	<0.01	<0.01	<1.0	<0.01
BR-32-23	246.40	247.60	1.20	<1.0	0.08	0.02	0.02	<0.01	<1.0	<0.01
BR-32-23	247.60	248.80	1.20	<1.0	0.05	0.01	0.02	<0.01	<1.0	<0.01
BR-32-23	248.80	250.00	1.20	11.0	0.56	0.07	0.04	<0.01	<1.0	<0.01
BR-32-23	250.00	251.20	1.20	9.0	0.11	0.02	0.01	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-32-23	251.20	252.40	1.20	2.0	0.05	0.01	<0.01	<0.01	<1.0	<0.01
BR-32-23	252.40	253.60	1.20	<1.0	0.14	0.06	0.01	<0.01	<1.0	<0.01
BR-32-23	253.60	254.80	1.20	3.0	0.01	0.02	0.01	0.05	<1.0	0.01
BR-32-23	254.80	256.00	1.20	10.0	0.10	0.05	0.09	<0.01	<1.0	<0.01
BR-32-23	256.00	257.00	1.00	<1.0	0.01	0.00	0.01	<0.01	<1.0	<0.01
BR-32-23	257.00	258.00	1.00	<1.0	0.01	0.05	0.03	<0.01	<1.0	<0.01
BR-32-23	258.00	258.70	0.70	4.0	0.01	0.21	0.01	<0.01	<1.0	<0.01
BR-32-23	258.70	259.70	1.00	54.0	0.88	0.51	<0.01	0.01	3.4	0.01
BR-32-23	259.70	260.50	0.80	97.0	2.44	0.88	<0.01	0.01	6.5	0.03
BR-32-23	260.50	261.20	0.70	133.0	1.32	1.24	<0.01	<0.01	12.2	0.03
BR-32-23	261.20	262.30	1.10	158.0	2.12	1.54	<0.01	0.01	22.4	0.09
BR-32-23	262.30	262.70	0.40	377.0	4.74	2.58	<0.01	0.04	32.2	0.25
BR-32-23	262.70	263.20	0.50	55.0	10.34	2.87	<0.01	<0.01	22.8	0.81
BR-32-23	263.20	264.00	0.80	36.0	8.43	2.41	<0.01	<0.01	46.4	0.77
BR-32-23	264.00	264.80	0.80	35.0	1.42	0.69	<0.01	<0.01	39.2	0.70
BR-32-23	264.80	266.00	1.20	<1.0	0.01	0.00	0.01	<0.01	1.6	0.03
BR-32-23	266.00	267.30	1.30	<1.0	0.01	0.00	<0.01	<0.01	<1.0	0.03
BR-32-23	267.30	268.20	0.90	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.02
BR-32-23	268.20	269.20	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.02
BR-32-23	269.20	270.40	1.20	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.03
BR-32-23	270.40	271.60	1.20	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.02
BR-32-23	271.60	272.80	1.20	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.05
BR-32-23	272.80	274.00	1.20	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.04
BR-32-23	274.00	275.20	1.20	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.06
BR-32-23	275.20	275.60	0.40	157.0	2.54	2.04	1.08	0.07	72.4	0.04
BR-32-23	275.60	276.40	0.80	82.0	1.06	0.54	0.29	0.01	3.5	0.03
BR-32-23	276.40	277.20	0.80	75.0	1.40	0.80	0.30	0.01	2.6	0.02
BR-32-23	277.20	278.10	0.90	40.0	4.36	0.83	0.09	<0.01	<1.0	0.01
BR-32-23	278.10	279.00	0.90	45.0	1.22	0.26	<0.01	<0.01	3.4	0.01
BR-32-23	279.00	280.00	1.00	8.0	0.13	0.08	<0.01	<0.01	0.4	<0.01
BR-32-23	280.00	281.00	1.00	5.0	0.34	0.07	<0.01	<0.01	0.4	<0.01
BR-32-23	281.00	282.00	1.00	42.0	0.35	0.33	<0.01	<0.01	2.3	0.01
BR-32-23	282.00	283.00	1.00	17.0	0.32	0.25	<0.01	<0.01	1.6	<0.01
BR-32-23	283.00	284.00	1.00	52.0	1.69	0.81	0.00	0.01	2.3	0.04
BR-32-23	284.00	284.80	0.80	35.0	3.14	0.89	0.02	<0.01	3.0	0.01
BR-32-23	284.80	285.50	0.70	11.0	0.32	0.20	<0.01	<0.01	1.8	0.02
BR-32-23	285.50	287.10	1.60	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.02
BR-32-23	287.10	288.20	1.10	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.02
BR-32-23	288.20	289.20	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.02
BR-32-23	289.20	290.20	1.00	<1.0	<0.01	0.00	<0.01	<0.01	1.5	0.02
BR-32-23	290.20	291.20	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.02
BR-32-23	291.20	292.40	1.20	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.02
BR-32-23	292.40	293.10	0.70	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.02
BR-32-23	293.10	294.00	0.90	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.01
BR-32-23	294.00	295.00	1.00	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.01
BR-32-23	295.00	296.10	1.10	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.01
BR-32-23	296.10	297.40	1.30	<1.0	<0.01	0.00	<0.01	<0.01	<1.0	0.01
BR-32-23	297.40	298.50	1.10	<1.0	<0.01	0.00	<0.01	<0.01	18.6	<0.01
BR-32-23	298.50	299.30	0.80	<1.0	<0.01	0.01	<0.01	<0.01	62.6	<0.01
BR-32-23	299.30	299.90	0.60	<1.0	0.02	0.04	0.02	0.01	4.3	0.01
BR-32-23	299.90	301.00	1.10	7.0	0.01	0.07	0.89	0.01	84.9	0.02
BR-32-23	301.00	302.00	1.00	3.0	0.01	0.01	0.56	0.01	83.7	0.02
BR-32-23	302.00	303.00	1.00	5.0	0.01	0.15	0.06	0.01	84.9	<0.01
BR-32-23	303.00	304.00	1.00	15.0	0.03	0.35	0.25	0.01	84.9	<0.01
BR-32-23	304.00	305.00	1.00	108.0	3.14	0.92	0.42	0.14	84.9	0.07
BR-32-23	305.00	306.00	1.00	96.0	6.12	0.90	0.70	0.17	84.9	0.09



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-32-23	306.00	307.00	1.00	98.0	6.53	1.54	0.60	0.19	81.2	0.11
BR-32-23	307.00	308.00	1.00	94.0	7.15	1.62	0.81	0.17	84.9	0.10
BR-32-23	308.00	309.00	1.00	76.0	6.16	0.97	0.54	0.15	84.9	0.08
BR-32-23	309.00	310.00	1.00	67.0	4.31	0.90	0.44	0.14	84.9	0.08
BR-32-23	310.00	311.00	1.00	66.0	6.30	1.34	0.72	0.12	84.0	0.07
BR-32-23	311.00	312.00	1.00	67.0	6.85	2.01	0.40	0.13	84.7	0.08
BR-32-23	312.00	313.00	1.00	72.0	7.66	2.24	0.56	0.16	81.2	0.22
BR-32-23	313.00	314.00	1.00	46.0	6.24	2.07	0.38	0.09	84.9	0.09
BR-32-23	314.00	315.00	1.00	52.0	7.33	2.27	0.55	0.12	80.3	0.14
BR-32-23	315.00	316.00	1.00	38.0	8.06	2.09	0.53	0.11	80.9	0.13
BR-32-23	316.00	317.00	1.00	41.0	7.98	2.69	0.41	0.11	81.8	0.12
BR-32-23	317.00	318.00	1.00	43.0	7.17	2.06	0.55	0.11	77.2	0.18
BR-32-23	318.00	319.00	1.00	57.0	7.32	2.41	0.60	0.16	80.9	0.19
BR-32-23	319.00	320.00	1.00	60.0	7.85	3.86	0.71	0.15	73.5	0.15
BR-32-23	320.00	321.00	1.00	54.0	7.85	2.26	0.39	0.14	78.9	0.21
BR-32-23	321.00	322.00	1.00	83.0	5.17	2.72	0.36	0.20	79.9	0.24
BR-32-23	322.00	323.00	1.00	78.0	3.94	2.96	0.40	0.17	81.2	0.12
BR-32-23	323.00	324.00	1.00	98.0	3.42	2.87	0.58	0.27	83.8	0.19
BR-32-23	324.00	325.00	1.00	95.0	5.13	4.82	0.74	0.32	79.0	0.17
BR-32-23	325.00	326.00	1.00	126.0	3.29	8.83	0.55	0.60	68.8	0.32
BR-32-23	326.00	327.00	1.00	70.0	5.01	2.37	0.71	0.32	78.7	0.18
BR-32-23	327.00	327.90	0.90	97.0	3.14	10.17	0.42	0.73	66.9	0.26
BR-32-23	327.90	328.90	1.00	172.0	10.12	14.09	1.08	1.27	40.0	0.53
BR-32-23	328.90	329.90	1.00	121.0	5.22	9.29	0.53	1.17	63.3	0.43
BR-32-23	329.90	330.60	0.70	147.0	4.51	17.53	1.10	1.93	43.8	0.72
BR-32-23	330.60	331.40	0.80	301.0	7.89	34.55	1.42	3.11	12.3	2.40
BR-32-23	331.40	332.00	0.60	268.0	9.91	23.58	1.10	2.48	24.1	0.94
BR-32-23	332.00	333.00	1.00	801.0	16.47	29.03	1.51	2.12	14.5	0.79
BR-32-23	333.00	334.00	1.00	1,088.0	11.56	35.79	1.83	2.78	13.6	0.79
BR-32-23	334.00	334.60	0.60	1,253.0	7.86	36.50	1.39	4.70	3.7	3.05
BR-32-23	334.60	335.30	0.70	524.0	2.51	30.94	0.65	4.92	1.2	0.92
BR-32-23	335.30	336.30	1.00	196.0	2.89	1.62	0.27	0.68	8.2	0.31
BR-32-23	336.30	337.00	0.70	121.0	0.62	1.61	0.31	1.40	1.5	0.34
BR-32-23	337.00	338.00	1.00	72.0	0.66	2.64	0.13	0.42	2.7	0.09
BR-32-23	338.00	339.00	1.00	49.0	2.49	2.25	0.23	0.26	2.6	0.18
BR-32-23	339.00	339.70	0.70	64.0	3.07	1.97	0.24	0.40	10.0	0.10
BR-32-23	339.70	340.40	0.70	45.0	0.26	0.16	0.42	1.23	3.3	0.36
BR-32-23	340.40	341.20	0.80	14.0	0.11	0.11	0.17	1.10	1.4	0.15
BR-32-23	341.20	342.00	0.80	20.0	0.33	0.23	0.09	0.17	4.2	0.05
BR-32-23	342.00	343.00	1.00	15.0	0.31	0.22	0.05	0.01	2.9	<0.01
BR-32-23	343.00	343.70	0.70	5.0	0.21	0.08	0.03	0.01	5.5	<0.01
BR-32-23	343.70	344.50	0.80	69.0	4.53	1.52	0.22	0.14	12.3	0.06
BR-32-23	344.50	345.50	1.00	48.0	3.17	1.42	0.46	0.41	13.4	0.14
BR-32-23	345.50	346.50	1.00	5.0	0.18	0.25	0.16	0.00	2.6	<0.01
BR-32-23	346.50	347.50	1.00	19.0	0.16	0.17	0.16	0.02	3.7	0.01
BR-32-23	347.50	348.30	0.80	10.0	0.61	0.32	0.16	0.03	1.9	0.01
BR-32-23	348.30	349.40	1.10	8.0	0.40	0.18	0.04	0.02	3.3	0.01
BR-32-23	349.40	350.40	1.00	3.0	0.06	0.01	0.02	0.03	<1.0	0.01
BR-32-23	350.40	351.40	1.00	<1.0	0.11	0.00	0.03	<0.01	<1.0	0.00
BR-32-23	351.40	352.60	1.20	4.0	0.17	0.04	0.06	0.04	<1.0	0.03
BR-32-23	352.60	353.80	1.20	<1.0	0.05	0.02	0.05	<0.01	<1.0	<0.01
BR-32-23	353.80	355.00	1.20	<1.0	0.04	0.01	0.04	<0.01	<1.0	<0.01
BR-32-23	355.00	356.00	1.00	<1.0	0.02	0.00	0.06	<0.01	<1.0	<0.01
BR-32-23	356.00	357.00	1.00	<1.0	0.09	0.04	0.04	0.04	<1.0	0.02
BR-32-23	357.00	358.00	1.00	<1.0	0.03	0.01	0.04	<0.01	<1.0	<0.01
BR-32-23	358.00	359.00	1.00	<1.0	0.03	<0.01	0.03	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-32-23	359.00	360.00	1.00	<1.0	0.06	0.01	0.03	<0.01	<1.0	<0.01
BR-32-23	360.00	361.00	1.00	<1.0	0.10	0.02	0.03	<0.01	<1.0	<0.01
BR-32-23	361.00	362.00	1.00	2.0	0.25	0.05	0.02	<0.01	<1.0	<0.01
BR-32-23	362.00	363.00	1.00	4.0	0.06	0.03	0.02	<0.01	<1.0	<0.01
BR-32-23	363.00	364.00	1.00	6.0	0.10	0.10	0.04	<0.01	<1.0	<0.01
BR-32-23	364.00	365.00	1.00	2.0	0.02	0.02	0.03	<0.01	<1.0	<0.01
BR-32-23	365.00	366.00	1.00	<1.0	0.04	0.01	0.02	<0.01	<1.0	<0.01
BR-32-23	366.00	367.00	1.00	2.0	0.20	0.02	0.04	<0.01	<1.0	<0.01
BR-32-23	367.00	368.00	1.00	2.0	0.12	0.02	0.01	<0.01	<1.0	<0.01
BR-32-23	368.00	369.00	1.00	<1.0	0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-32-23	369.00	370.00	1.00	<1.0	0.06	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-23	370.00	371.00	1.00	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-23	371.00	372.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-23	372.00	373.00	1.00	<1.0	0.05	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-23	373.00	374.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-32-23	374.00	375.20	1.20	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	0.00	80.10	80.10	Interval not sampled						
BR-33B-23	80.10	81.30	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	81.30	82.30	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	82.30	83.10	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	83.10	84.20	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	84.20	85.60	1.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	85.60	86.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	86.80	88.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	88.00	89.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	89.00	90.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	90.00	91.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	91.20	92.00	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	92.00	93.00	1.00	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	93.00	94.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	94.00	95.00	1.00	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	95.00	96.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	96.00	97.00	1.00	<1.0	<0.01	<0.01	0.02	0.01	<1.0	<0.01
BR-33B-23	97.00	97.80	0.80	<1.0	<0.01	<0.01	<0.01	0.00	<1.0	<0.01
BR-33B-23	97.80	99.00	1.20	<1.0	0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-33B-23	99.00	99.50	0.50	<1.0	0.02	0.01	<0.01	0.01	<1.0	0.01
BR-33B-23	99.50	100.40	0.90	<1.0	0.02	0.03	<0.01	0.01	<1.0	0.01
BR-33B-23	100.40	101.10	0.70	<1.0	0.01	0.02	<0.01	0.01	<1.0	0.01
BR-33B-23	101.10	102.00	0.90	<1.0	<0.01	<0.01	<0.01	0.00	<1.0	0.00
BR-33B-23	102.00	103.10	1.10	<1.0	<0.01	0.01	<0.01	0.01	<1.0	<0.01
BR-33B-23	103.10	104.10	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	104.10	105.00	0.90	<1.0	<0.01	0.01	0.01	0.00	<1.0	0.01
BR-33B-23	105.00	106.20	1.20	<1.0	<0.01	0.01	0.01	0.01	<1.0	0.01
BR-33B-23	106.20	107.40	1.20	<1.0	<0.01	0.02	0.03	0.01	<1.0	0.01
BR-33B-23	107.40	108.60	1.20	<1.0	0.01	0.02	0.02	0.01	<1.0	0.01
BR-33B-23	108.60	109.60	1.00	<1.0	<0.01	0.01	0.00	0.00	<1.0	0.01
BR-33B-23	109.60	110.60	1.00	<1.0	<0.01	<0.01	0.01	0.00	<1.0	0.02
BR-33B-23	110.60	111.20	0.60	<1.0	0.02	0.06	0.02	0.01	2.5	0.02
BR-33B-23	111.20	111.70	0.50	<1.0	<0.01	<0.01	<0.01	<0.01	84.9	0.00
BR-33B-23	111.70	112.40	0.70	45.0	0.22	0.19	0.62	0.01	15.5	0.20
BR-33B-23	112.40	112.90	0.50	122.0	0.06	0.28	0.69	0.02	47.1	0.30
BR-33B-23	112.90	113.40	0.50	<1.0	0.01	<0.01	0.02	0.00	84.9	0.01
BR-33B-23	113.40	114.30	0.90	714.0	0.85	7.43	4.07	0.90	15.4	0.67
BR-33B-23	114.30	114.90	0.60	489.0	1.77	6.38	3.28	0.60	57.6	0.40
BR-33B-23	114.90	115.50	0.60	125.0	0.29	3.87	1.67	0.34	70.4	0.16
BR-33B-23	115.50	116.20	0.70	16.0	0.04	0.16	0.12	0.01	2.3	0.09



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-33B-23	116.20	116.80	0.60	20.0	0.13	0.53	0.25	0.29	4.5	0.26
BR-33B-23	116.80	117.40	0.60	53.0	0.15	0.98	1.07	0.20	12.8	0.31
BR-33B-23	117.40	118.40	1.00	6.0	0.03	0.06	0.40	0.01	1.1	0.02
BR-33B-23	118.40	119.10	0.70	3.0	0.01	0.02	0.04	0.00	<1.0	0.01
BR-33B-23	119.10	120.00	0.90	<1.0	0.01	0.01	0.03	<0.01	<1.0	0.01
BR-33B-23	120.00	121.00	1.00	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	121.00	122.00	1.00	<1.0	0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-33B-23	122.00	123.00	1.00	<1.0	0.02	<0.01	0.01	<0.01	<1.0	<0.01
BR-33B-23	123.00	124.00	1.00	<1.0	0.02	<0.01	0.01	<0.01	<1.0	<0.01
BR-33B-23	124.00	125.00	1.00	<1.0	0.02	<0.01	0.04	0.00	<1.0	<0.01
BR-33B-23	125.00	126.00	1.00	<1.0	<0.01	<0.01	0.03	0.02	<1.0	0.02
BR-33B-23	126.00	126.90	0.90	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	0.01
BR-33B-23	126.90	128.10	1.20	2.0	0.05	0.02	0.07	<0.01	1.0	0.01
BR-33B-23	128.10	129.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	129.00	130.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	130.00	131.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	131.00	132.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	132.00	133.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	133.00	134.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	134.00	135.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	135.00	136.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-33B-23	136.00	136.70	0.70	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	136.70	137.70	1.00	<1.0	0.00	<0.01	<0.01	<0.01	<1.0	0.01
BR-33B-23	137.70	138.60	0.90	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	138.60	139.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	139.80	141.00	1.20	<1.0	0.05	<0.01	<0.01	<0.01	5.1	<0.01
BR-33B-23	141.00	142.00	1.00	<1.0	<0.01	0.02	<0.01	<0.01	<1.0	<0.01
BR-33B-23	142.00	143.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	143.00	144.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	144.00	145.00	1.00	<1.0	0.03	0.05	<0.01	<0.01	<1.0	<0.01
BR-33B-23	145.00	145.80	0.80	<1.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	145.80	147.00	1.20	<1.0	0.03	0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	147.00	148.00	1.00	<1.0	0.02	0.00	<0.01	<0.01	<1.0	<0.01
BR-33B-23	148.00	148.60	0.60	<1.0	0.04	0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	148.60	149.10	0.50	2.0	0.01	<0.01	0.01	<0.01	<1.0	0.01
BR-33B-23	149.10	150.00	0.90	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-33B-23	150.00	150.80	0.80	3.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	150.80	151.80	1.00	7.0	0.20	0.10	<0.01	<0.01	<1.0	<0.01
BR-33B-23	151.80	153.00	1.20	2.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	153.00	154.20	1.20	4.0	0.00	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	154.20	155.40	1.20	5.0	0.01	0.01	<0.01	<0.01	1.4	<0.01
BR-33B-23	155.40	156.60	1.20	8.0	<0.01	<0.01	<0.01	<0.01	1.1	<0.01
BR-33B-23	156.60	157.80	1.20	5.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	157.80	159.00	1.20	4.0	<0.01	<0.01	<0.01	<0.01	1.7	<0.01
BR-33B-23	159.00	160.00	1.00	8.0	0.01	<0.01	<0.01	<0.01	3.2	<0.01
BR-33B-23	160.00	161.00	1.00	5.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	161.00	161.80	0.80	2.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	161.80	163.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	163.00	164.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	164.10	165.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	165.00	166.00	1.00	13.0	0.01	0.08	<0.01	<0.01	<1.0	<0.01
BR-33B-23	166.00	167.20	1.20	3.0	0.03	<0.01	<0.01	<0.01	1.1	<0.01
BR-33B-23	167.20	168.00	0.80	55.0	0.18	0.05	<0.01	0.01	1.2	<0.01
BR-33B-23	168.00	168.70	0.70	36.0	0.06	0.07	<0.01	<0.01	1.4	<0.01
BR-33B-23	168.70	169.70	1.00	10.0	0.01	0.03	0.01	<0.01	1.1	<0.01
BR-33B-23	169.70	170.50	0.80	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-33B-23	170.50	171.50	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	171.50	174.80	3.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	174.80	176.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	176.00	177.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	177.20	178.20	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	178.20	179.50	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	179.50	180.70	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	180.70	182.00	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	182.00	183.00	1.00	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-33B-23	183.00	184.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	184.00	185.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	185.00	186.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	186.00	187.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	187.20	188.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	188.40	189.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	189.60	190.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	190.80	192.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	192.00	193.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-33B-23	193.00	194.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	194.00	195.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	195.00	196.20	1.20	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-33B-23	196.20	197.10	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	197.10	198.10	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	198.10	199.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	199.00	200.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	200.10	201.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	201.00	202.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	202.00	203.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	203.00	203.90	0.90	<1.0	<0.01	<0.01	0.03	<0.01	13.8	<0.01
BR-33B-23	203.90	205.10	1.20	<1.0	0.01	0.01	0.02	0.01	84.9	<0.01
BR-33B-23	205.10	205.50	0.40	69.0	0.50	0.76	0.40	0.04	13.7	0.01
BR-33B-23	205.50	206.50	1.00	2,707.0	18.54	16.75	7.33	0.94	32.1	0.34
BR-33B-23	206.50	207.50	1.00	851.0	11.81	8.17	3.99	0.42	50.9	0.20
BR-33B-23	207.50	208.50	1.00	462.0	7.07	5.82	3.91	0.34	73.8	0.16
BR-33B-23	208.50	209.50	1.00	905.0	7.06	6.65	6.54	0.60	69.7	0.28
BR-33B-23	209.50	210.00	0.50	811.0	3.85	6.32	7.87	0.55	73.8	0.30
BR-33B-23	210.00	210.60	0.60	1,666.0	31.47	22.23	12.60	2.62	13.0	0.69
BR-33B-23	210.60	211.40	0.80	920.0	2.06	3.44	5.96	0.53	81.6	0.13
BR-33B-23	211.40	212.10	0.70	512.0	25.26	12.58	3.36	3.50	30.7	0.59
BR-33B-23	212.10	213.10	1.00	958.0	30.93	12.54	6.32	5.36	13.1	1.36
BR-33B-23	213.10	214.10	1.00	697.0	36.12	19.25	4.71	3.69	11.2	0.52
BR-33B-23	214.10	215.10	1.00	653.0	13.87	12.94	5.93	1.78	40.0	0.17
BR-33B-23	215.10	216.00	0.90	959.0	15.45	11.91	8.19	2.58	14.1	0.34
BR-33B-23	216.00	216.50	0.50	191.0	14.25	7.58	2.31	2.00	2.8	0.19
BR-33B-23	216.50	217.50	1.00	28.0	2.65	2.34	0.13	0.62	<1.0	0.05
BR-33B-23	217.50	218.50	1.00	6.0	0.55	0.15	0.18	0.10	5.7	0.05
BR-33B-23	218.50	219.50	1.00	4.0	1.35	0.08	0.48	0.02	9.2	0.02
BR-33B-23	219.50	220.60	1.10	9.0	2.34	0.16	0.41	0.15	6.4	0.12
BR-33B-23	220.60	221.80	1.20	1.0	0.80	0.04	0.21	0.02	<1.0	0.01
BR-33B-23	221.80	222.90	1.10	3.0	1.38	0.06	0.42	0.01	10.1	0.02
BR-33B-23	222.90	223.70	0.80	4.0	1.94	0.08	0.34	0.03	4.7	0.03
BR-33B-23	223.70	224.50	0.80	33.0	9.48	0.36	0.72	3.14	5.5	2.14
BR-33B-23	224.50	225.70	1.20	2.0	0.38	0.04	0.12	0.12	1.5	0.07
BR-33B-23	225.70	226.80	1.10	5.0	0.64	0.18	0.14	0.16	<1.0	0.09
BR-33B-23	226.80	228.00	1.20	<1.0	0.13	0.07	0.05	<0.01	1.9	0.01
BR-33B-23	228.00	229.00	1.00	10.0	0.50	0.13	0.10	0.18	2.0	0.14



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-33B-23	229.00	230.00	1.00	<1.0	0.17	0.01	0.06	0.01	1.9	0.01
BR-33B-23	230.00	231.00	1.00	<1.0	0.05	0.02	0.05	0.00	<1.0	0.01
BR-33B-23	231.00	232.00	1.00	5.0	0.48	0.24	0.14	0.30	1.1	0.18
BR-33B-23	232.00	233.00	1.00	11.0	0.42	0.10	0.14	0.17	3.5	0.10
BR-33B-23	233.00	234.00	1.00	1.0	0.31	0.01	0.14	0.02	2.0	0.01
BR-33B-23	234.00	235.20	1.20	3.0	0.40	0.03	0.12	0.04	1.3	0.01
BR-33B-23	235.20	236.40	1.20	<1.0	0.37	0.01	0.08	<0.01	0.7	<0.01
BR-33B-23	236.40	237.60	1.20	<1.0	0.50	0.07	0.07	<0.01	0.5	0.01
BR-33B-23	237.60	238.80	1.20	<1.0	0.13	0.00	0.03	<0.01	0.4	<0.01
BR-33B-23	238.80	240.00	1.20	5.0	0.37	0.05	0.09	0.02	1.9	0.02
BR-33B-23	240.00	241.00	1.00	2.0	0.08	<0.01	0.03	<0.01	<1.0	<0.01
BR-33B-23	241.00	242.00	1.00	4.0	0.14	0.01	0.04	<0.01	<1.0	<0.01
BR-33B-23	242.00	243.00	1.00	2.0	0.17	0.01	0.07	<0.01	1.1	<0.01
BR-33B-23	243.00	244.00	1.00	2.0	0.18	<0.01	0.08	<0.01	1.7	<0.01
BR-33B-23	244.00	245.00	1.00	8.0	0.21	<0.01	0.09	<0.01	1.2	<0.01
BR-33B-23	245.00	246.00	1.00	3.0	0.22	<0.01	0.08	<0.01	1.1	<0.01
BR-33B-23	246.00	247.00	1.00	9.0	0.29	0.02	0.11	<0.01	1.6	<0.01
BR-33B-23	247.00	248.00	1.00	2.0	0.22	<0.01	0.09	<0.01	1.3	<0.01
BR-33B-23	248.00	249.00	1.00	9.0	0.13	0.09	0.04	0.01	<1.0	0.01
BR-33B-23	249.00	250.00	1.00	22.0	0.22	0.02	0.05	<0.01	<1.0	0.01
BR-33B-23	250.00	251.00	1.00	<1.0	0.05	<0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	251.00	252.00	1.00	<1.0	0.07	0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	252.00	253.00	1.00	<1.0	0.36	0.06	0.04	<0.01	1.6	<0.01
BR-33B-23	253.00	254.00	1.00	14.0	1.39	0.51	0.07	0.19	3.0	0.06
BR-33B-23	254.00	255.00	1.00	13.0	0.76	0.28	0.13	0.14	<1.0	0.04
BR-33B-23	255.00	256.00	1.00	30.0	2.21	0.96	0.34	0.86	4.2	0.43
BR-33B-23	256.00	257.00	1.00	<1.0	0.15	0.01	0.08	0.01	1.4	<0.01
BR-33B-23	257.00	258.00	1.00	<1.0	0.02	<0.01	0.05	0.01	<1.0	0.01
BR-33B-23	258.00	259.00	1.00	<1.0	0.11	0.01	0.04	<0.01	<1.0	<0.01
BR-33B-23	259.00	260.00	1.00	<1.0	0.08	<0.01	0.03	<0.01	<1.0	<0.01
BR-33B-23	260.00	261.00	1.00	<1.0	0.04	<0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	261.00	262.10	1.10	<1.0	0.03	<0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	262.10	263.00	0.90	<1.0	0.02	<0.01	0.03	<0.01	<1.0	<0.01
BR-33B-23	263.00	264.00	1.00	<1.0	0.02	<0.01	0.08	<0.01	<1.0	<0.01
BR-33B-23	264.00	265.00	1.00	<1.0	0.01	<0.01	0.06	<0.01	<1.0	<0.01
BR-33B-23	265.00	266.00	1.00	<1.0	0.01	<0.01	0.05	<0.01	<1.0	<0.01
BR-33B-23	266.00	267.00	1.00	<1.0	0.01	<0.01	0.06	<0.01	<1.0	<0.01
BR-33B-23	267.00	268.00	1.00	<1.0	0.01	<0.01	0.05	<0.01	<1.0	<0.01
BR-33B-23	268.00	269.00	1.00	20.0	2.15	1.02	0.09	0.58	<1.0	0.14
BR-33B-23	269.00	270.00	1.00	1.0	0.01	0.00	0.07	<0.01	<1.0	<0.01
BR-33B-23	270.00	271.00	1.00	20.0	2.01	1.55	0.09	0.17	1.8	0.03
BR-33B-23	271.00	272.00	1.00	3.0	0.21	0.09	0.07	0.03	1.1	0.00
BR-33B-23	272.00	273.00	1.00	<1.0	0.08	0.03	0.03	0.02	<1.0	0.01
BR-33B-23	273.00	274.00	1.00	<1.0	0.01	0.00	0.03	<0.01	<1.0	<0.01
BR-33B-23	274.00	275.00	1.00	<1.0	0.03	0.01	0.06	<0.01	<1.0	<0.01
BR-33B-23	275.00	276.20	1.20	<1.0	0.01	<0.01	0.05	<0.01	<1.0	<0.01
BR-33B-23	276.20	277.40	1.20	<1.0	0.05	0.01	<0.01	0.02	<1.0	0.01
BR-33B-23	277.40	278.60	1.20	<1.0	0.09	0.03	0.03	0.01	<1.0	<0.01
BR-33B-23	278.60	279.60	1.00	<1.0	0.00	0.01	0.07	<0.01	<1.0	<0.01
BR-33B-23	279.60	280.40	0.80	<1.0	0.10	0.03	0.04	<0.01	<1.0	<0.01
BR-33B-23	280.40	281.00	0.60	54.0	2.97	2.65	0.07	0.71	2.1	0.32
BR-33B-23	281.00	282.00	1.00	<1.0	0.13	0.03	0.06	<0.01	<1.0	<0.01
BR-33B-23	282.00	283.00	1.00	<1.0	0.04	0.01	0.07	<0.01	<1.0	<0.01
BR-33B-23	283.00	284.00	1.00	<1.0	0.12	0.02	0.06	<0.01	1.0	<0.01
BR-33B-23	284.00	285.00	1.00	<1.0	0.00	<0.01	0.06	<0.01	<1.0	<0.01
BR-33B-23	285.00	286.00	1.00	3.0	0.24	0.07	0.05	0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-33B-23	286.00	287.00	1.00	1.0	0.03	<0.01	0.07	0.00	<1.0	<0.01
BR-33B-23	287.00	288.00	1.00	1.0	0.01	<0.01	0.01	0.03	<1.0	0.01
BR-33B-23	288.00	289.00	1.00	2.0	0.03	0.04	0.06	0.02	<1.0	0.01
BR-33B-23	289.00	290.00	1.00	10.0	0.23	0.10	0.06	0.05	1.3	0.02
BR-33B-23	290.00	291.00	1.00	5.0	0.28	0.08	0.07	<0.01	1.9	<0.01
BR-33B-23	291.00	292.00	1.00	2.0	0.20	0.04	0.05	0.01	1.3	<0.01
BR-33B-23	292.00	292.80	0.80	4.0	0.12	0.06	0.05	0.04	1.0	0.02
BR-33B-23	292.80	294.00	1.20	<1.0	0.02	<0.01	0.06	<0.01	<1.0	0.00
BR-33B-23	294.00	295.00	1.00	3.0	0.07	0.01	0.06	<0.01	3.0	<0.01
BR-33B-23	295.00	296.00	1.00	2.0	0.12	0.03	0.04	<0.01	3.1	<0.01
BR-33B-23	296.00	296.70	0.70	34.0	0.30	0.11	0.13	0.25	4.4	0.10
BR-33B-23	296.70	297.90	1.20	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-33B-23	297.90	299.10	1.20	<1.0	0.02	<0.01	0.07	0.02	<1.0	0.01
BR-33B-23	299.10	300.20	1.10	<1.0	0.02	<0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	300.20	301.40	1.20	<1.0	0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-33B-23	301.40	302.50	1.10	2.0	0.11	0.05	0.07	<0.01	<1.0	<0.01
BR-33B-23	302.50	303.50	1.00	<1.0	0.01	0.06	0.04	<0.01	<1.0	<0.01
BR-33B-23	303.50	304.70	1.20	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	304.70	305.80	1.10	<1.0	0.03	0.02	0.03	<0.01	<1.0	<0.01
BR-33B-23	305.80	307.00	1.20	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-33B-23	307.00	308.00	1.00	4.0	0.03	0.03	0.02	0.10	<1.0	0.02
BR-33B-23	308.00	309.00	1.00	2.0	0.10	0.03	0.01	0.02	<1.0	<0.01
BR-33B-23	309.00	310.00	1.00	<1.0	0.03	0.02	0.03	0.00	<1.0	<0.01
BR-33B-23	310.00	311.00	1.00	<1.0	0.39	0.15	0.06	0.01	<1.0	<0.01
BR-33B-23	311.00	312.00	1.00	<1.0	0.01	<0.01	0.01	0.00	<1.0	<0.01
BR-33B-23	312.00	313.00	1.00	<1.0	0.01	<0.01	0.08	0.01	<1.0	<0.01
BR-33B-23	313.00	314.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	314.00	315.00	1.00	<1.0	0.01	<0.01	<0.01	0.01	<1.0	0.01
BR-33B-23	315.00	316.00	1.00	10.0	0.04	<0.01	0.04	0.21	<1.0	0.09
BR-33B-23	316.00	317.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	317.00	318.00	1.00	<1.0	0.01	<0.01	<0.01	0.01	<1.0	0.01
BR-33B-23	318.00	319.00	1.00	<1.0	0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-33B-23	319.00	320.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	320.00	320.90	0.90	<1.0	0.03	0.01	0.00	<0.01	<1.0	<0.01
BR-33B-23	320.90	322.00	1.10	3.0	<0.01	<0.01	0.04	<0.01	3.3	0.01
BR-33B-23	322.00	323.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	323.00	324.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	324.00	325.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	325.00	326.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	326.00	327.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-33B-23	327.00	328.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	328.00	329.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	329.00	330.00	1.00	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-33B-23	330.00	331.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	331.00	332.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-33B-23	332.00	333.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	333.00	334.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-33B-23	334.00	335.00	1.00	<1.0	<0.01	<0.01	0.05	<0.01	<1.0	<0.01
BR-33B-23	335.00	336.00	1.00	<1.0	0.01	<0.01	0.06	<0.01	<1.0	<0.01
BR-33B-23	336.00	337.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	337.00	338.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	338.00	339.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	339.00	340.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-33B-23	340.00	341.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	341.00	342.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-33B-23	342.00	343.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-33B-23	343.00	344.10	1.10	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-34-23	0.00	39.70	39.70	Interval not sampled						
BR-34-23	39.70	40.80	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	40.80	42.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	42.00	42.90	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	42.90	44.00	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	44.00	45.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	45.00	46.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	46.00	47.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	47.00	48.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	48.00	49.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	49.00	50.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	50.00	51.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	51.00	52.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	52.00	53.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	53.00	54.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	54.00	55.40	1.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	55.40	56.30	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	56.30	57.30	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	57.30	58.90	1.60	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	58.90	60.00	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	60.00	61.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	61.20	62.10	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	62.10	63.20	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	63.20	64.30	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	64.30	65.30	1.00	<1.0	0.01	<0.01	<0.01	0.01	<1.0	<0.01
BR-34-23	65.30	66.40	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	66.40	67.50	1.10	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-34-23	67.50	68.70	1.20	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	68.70	69.70	1.00	<1.0	<0.01	0.01	<0.01	0.01	<1.0	0.01
BR-34-23	69.70	70.70	1.00	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	70.70	71.90	1.20	<1.0	<0.01	0.02	<0.01	<0.01	<1.0	0.01
BR-34-23	71.90	73.30	1.40	<1.0	<0.01	0.02	<0.01	<0.01	<1.0	0.02
BR-34-23	73.30	74.30	1.00	<1.0	0.02	0.15	0.06	0.03	<1.0	0.04
BR-34-23	74.30	75.30	1.00	<1.0	0.01	0.07	0.04	0.02	<1.0	0.03
BR-34-23	75.30	76.50	1.20	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	76.50	77.50	1.00	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	77.50	78.20	0.70	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	78.20	79.40	1.20	<1.0	0.01	0.01	<0.01	<0.01	<1.0	0.03
BR-34-23	79.40	80.60	1.20	<1.0	0.01	0.03	<0.01	<0.01	<1.0	0.03
BR-34-23	80.60	81.80	1.20	<1.0	0.01	0.04	<0.01	<0.01	<1.0	0.03
BR-34-23	81.80	83.00	1.20	<1.0	0.01	0.07	<0.01	<0.01	<1.0	0.03
BR-34-23	83.00	84.20	1.20	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	0.04
BR-34-23	84.20	85.50	1.30	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	0.02
BR-34-23	85.50	86.60	1.10	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	0.03
BR-34-23	86.60	87.80	1.20	<1.0	0.05	0.03	<0.01	<0.01	<1.0	0.04
BR-34-23	87.80	89.00	1.20	<1.0	0.14	0.01	<0.01	<0.01	<1.0	0.03
BR-34-23	89.00	90.00	1.00	<1.0	0.12	0.05	<0.01	<0.01	<1.0	0.02
BR-34-23	90.00	91.00	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	91.00	92.00	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	0.03
BR-34-23	92.00	93.00	1.00	<1.0	0.05	0.02	0.04	<0.01	<1.0	0.03
BR-34-23	93.00	94.00	1.00	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	0.02
BR-34-23	94.00	95.00	1.00	<1.0	<0.01	<0.01	0.08	<0.01	<1.0	0.01
BR-34-23	95.00	96.00	1.00	4.0	0.08	0.05	0.04	0.01	1.4	0.04
BR-34-23	96.00	96.80	0.80	14.0	0.18	0.15	0.09	0.03	<1.0	0.08
BR-34-23	96.80	98.00	1.20	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	0.02



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-34-23	98.00	99.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-34-23	99.00	100.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-34-23	100.00	101.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-34-23	101.00	102.00	1.00	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	0.02
BR-34-23	102.00	103.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-34-23	103.00	104.00	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	104.00	105.00	1.00	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	105.00	106.00	1.00	<1.0	0.10	0.04	<0.01	<0.01	<1.0	<0.01
BR-34-23	106.00	107.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	107.00	108.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	1.4	0.01
BR-34-23	108.00	109.00	1.00	<1.0	0.05	0.02	<0.01	<0.01	2.1	0.01
BR-34-23	109.00	110.00	1.00	<1.0	0.06	0.01	<0.01	<0.01	3.1	0.01
BR-34-23	110.00	111.00	1.00	<1.0	0.02	0.01	<0.01	<0.01	1.1	0.01
BR-34-23	111.00	112.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	112.00	113.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	113.00	114.00	1.00	<1.0	0.03	0.02	<0.01	<0.01	<1.0	0.01
BR-34-23	114.00	115.00	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	115.00	116.00	1.00	<1.0	0.01	0.01	<0.01	<0.01	<1.0	0.02
BR-34-23	116.00	117.00	1.00	<1.0	0.02	0.01	<0.01	<0.01	<1.0	0.02
BR-34-23	117.00	118.00	1.00	<1.0	0.04	0.02	<0.01	<0.01	<1.0	0.02
BR-34-23	118.00	119.00	1.00	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	119.00	120.00	1.00	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	0.02
BR-34-23	120.00	121.20	1.20	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	121.20	122.30	1.10	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	122.30	122.80	0.50	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	122.80	123.90	1.10	<1.0	0.03	0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	123.90	124.70	0.80	79.0	0.32	2.58	1.06	0.10	68.4	0.28
BR-34-23	124.70	125.50	0.80	<1.0	0.04	2.86	0.49	0.03	84.9	0.21
BR-34-23	125.50	126.30	0.80	413.0	12.49	6.99	2.29	0.64	42.7	1.89
BR-34-23	126.30	127.00	0.70	36.0	1.72	0.79	0.52	0.07	2.9	0.12
BR-34-23	127.00	128.10	1.10	27.0	0.34	0.34	0.22	0.02	<1.0	0.09
BR-34-23	128.10	129.00	0.90	3.0	0.09	0.03	0.01	<0.01	<1.0	<0.01
BR-34-23	129.00	130.10	1.10	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.02
BR-34-23	130.10	131.30	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	131.30	132.50	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-34-23	132.50	133.60	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	133.60	134.90	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	134.90	135.90	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	135.90	137.00	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	137.00	138.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	138.00	139.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	139.00	139.70	0.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	139.70	140.90	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	140.90	142.00	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	142.00	143.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	143.00	144.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	144.00	145.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	145.00	146.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	146.00	147.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	147.00	148.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	148.00	149.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	149.00	150.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	150.00	151.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	151.00	152.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	152.00	153.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	153.00	154.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-34-23	154.00	155.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	155.00	156.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	156.00	157.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	157.00	158.00	1.00	<1.0	<0.01	<0.01	<0.01	0.01	<1.0	<0.01
BR-34-23	158.00	159.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	159.00	160.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	160.00	161.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	161.20	162.30	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	162.30	163.50	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	163.50	164.80	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	164.80	166.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	166.00	167.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	167.00	168.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	168.00	169.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	169.00	170.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	170.00	171.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	171.00	172.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	172.00	173.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	173.00	174.00	1.00	<1.0	<0.01	<0.01	0.10	<0.01	<1.0	<0.01
BR-34-23	174.00	175.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-34-23	175.00	176.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	176.00	177.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	177.00	178.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	178.00	179.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	179.00	180.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	180.00	181.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	181.20	182.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	182.40	183.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	183.60	184.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	184.80	186.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	186.00	187.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	187.00	188.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	188.00	189.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-34-23	189.00	190.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	190.00	191.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	191.00	192.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	192.00	193.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	193.00	194.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	194.20	195.20	1.00	<1.0	<0.01	0.02	0.02	<0.01	6.2	<0.01
BR-34-23	195.20	196.20	1.00	<1.0	0.01	0.01	0.01	<0.01	77.9	<0.01
BR-34-23	196.20	197.00	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	77.9	<0.01
BR-34-23	197.00	198.00	1.00	<1.0	0.01	0.01	0.01	<0.01	66.3	<0.01
BR-34-23	198.00	199.00	1.00	<1.0	0.02	0.02	<0.01	<0.01	<1.0	<0.01
BR-34-23	199.00	200.20	1.20	<1.0	0.02	0.17	0.02	0.01	0.4	0.01
BR-34-23	200.20	200.70	0.50	<1.0	0.08	0.44	0.58	0.05	30.4	0.02
BR-34-23	200.70	201.30	0.60	8.0	0.26	0.95	1.32	0.01	83.7	0.01
BR-34-23	201.30	202.10	0.80	9.0	0.36	0.37	0.15	0.02	2.2	0.02
BR-34-23	202.10	202.90	0.80	5.0	0.12	0.25	0.29	0.02	3.2	0.03
BR-34-23	202.90	203.80	0.90	88.0	0.25	1.44	2.17	0.15	73.4	0.10
BR-34-23	203.80	204.60	0.80	1,768.0	3.74	7.28	12.50	4.73	51.4	2.16
BR-34-23	204.60	205.20	0.60	35.0	0.40	0.36	0.39	0.07	9.9	0.05
BR-34-23	205.20	206.10	0.90	<1.0	0.20	0.06	0.01	<0.01	1.6	<0.01
BR-34-23	206.10	207.00	0.90	<1.0	0.12	0.04	<0.01	<0.01	<1.0	0.01
BR-34-23	207.00	208.00	1.00	8.0	0.01	0.03	<0.01	<0.01	<1.0	<0.01
BR-34-23	208.00	208.90	0.90	20.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	208.90	209.70	0.80	10.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-34-23	209.70	210.80	1.10	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	210.80	212.00	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	212.00	213.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	213.00	214.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	214.00	215.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	215.00	216.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	216.00	217.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	217.00	218.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	218.00	219.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	219.00	220.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-34-23	220.00	221.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-35-23	0.00	80.50	80.50	No interval sampled						
BR-35-23	80.50	81.70	1.20	<1.0	<0.01	0.00	0.00	0.01	<1.0	<0.01
BR-35-23	81.70	82.90	1.20	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	82.90	84.10	1.20	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	84.10	85.30	1.20	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	85.30	86.40	1.10	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	86.40	87.60	1.20	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	87.60	89.30	1.70	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	89.30	91.20	1.90	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	91.20	92.40	1.20	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	92.40	93.60	1.20	<1.0	<0.01	0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	93.60	95.10	1.50	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	95.10	96.00	0.90	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	96.00	97.00	1.00	<1.0	0.01	0.01	0.00	0.01	<1.0	<0.01
BR-35-23	97.00	98.20	1.20	<1.0	<0.01	0.05	0.00	<0.01	<1.0	<0.01
BR-35-23	98.20	98.70	0.50	<1.0	0.01	0.01	0.00	<0.01	<1.0	0.02
BR-35-23	98.70	99.50	0.80	<1.0	0.02	0.08	0.00	0.01	<1.0	<0.01
BR-35-23	99.50	101.00	1.50	<1.0	0.03	0.10	0.00	0.01	<1.0	<0.01
BR-35-23	101.00	101.90	0.90	<1.0	0.02	0.05	0.01	0.01	<1.0	<0.01
BR-35-23	101.90	103.00	1.10	<1.0	0.01	0.01	0.00	0.01	<1.0	0.01
BR-35-23	103.00	104.00	1.00	<1.0	0.01	0.00	0.00	<0.01	<1.0	0.01
BR-35-23	104.00	105.00	1.00	<1.0	0.02	0.00	0.00	<0.01	<1.0	0.01
BR-35-23	105.00	106.10	1.10	<1.0	0.01	0.03	0.00	<0.01	<1.0	0.02
BR-35-23	106.10	106.60	0.50	<1.0	<0.01	0.03	0.00	<0.01	<1.0	0.02
BR-35-23	106.60	107.60	1.00	<1.0	<0.01	0.01	0.00	<0.01	<1.0	0.02
BR-35-23	107.60	108.30	0.70	<1.0	0.06	0.04	0.01	<0.01	<1.0	0.05
BR-35-23	108.30	109.10	0.80	9.0	0.43	0.17	0.12	0.02	1.7	0.07
BR-35-23	109.10	110.10	1.00	1.0	0.02	0.03	0.00	<0.01	<1.0	0.01
BR-35-23	110.10	111.00	0.90	4.0	0.01	0.04	0.04	0.01	<1.0	0.02
BR-35-23	111.00	112.00	1.00	<1.0	0.01	0.02	0.06	<0.01	<1.0	0.01
BR-35-23	112.00	113.00	1.00	<1.0	<0.01	0.00	0.03	<0.01	<1.0	0.00
BR-35-23	113.00	114.00	1.00	<1.0	0.01	0.01	0.02	<0.01	<1.0	0.00
BR-35-23	114.00	115.00	1.00	4.0	0.08	0.03	0.04	<0.01	<1.0	0.01
BR-35-23	115.00	115.70	0.70	2.0	0.02	0.01	0.03	<0.01	<1.0	0.01
BR-35-23	115.70	116.30	0.60	<1.0	<0.01	0.00	0.00	<0.01	<1.0	0.01
BR-35-23	116.30	117.40	1.10	<1.0	0.02	0.01	0.02	<0.01	<1.0	0.01
BR-35-23	117.40	118.40	1.00	5.0	0.11	0.02	0.10	0.01	3.0	0.02
BR-35-23	118.40	119.40	1.00	18.0	0.10	0.01	0.05	0.50	33.5	0.23
BR-35-23	119.40	120.30	0.90	7.0	0.02	0.21	0.03	0.10	3.2	0.12
BR-35-23	120.30	121.00	0.70	<1.0	0.02	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	121.00	122.00	1.00	<1.0	0.01	0.00	0.02	<0.01	2.9	<0.01
BR-35-23	122.00	122.90	0.90	<1.0	<0.01	0.00	0.05	<0.01	<1.0	<0.01
BR-35-23	122.90	124.00	1.10	<1.0	0.07	0.02	0.06	0.01	1.3	0.01
BR-35-23	124.00	125.00	1.00	<1.0	0.05	0.01	0.03	<0.01	<1.0	<0.01
BR-35-23	125.00	126.00	1.00	<1.0	<0.01	0.00	0.02	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-35-23	126.00	127.00	1.00	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	127.00	128.00	1.00	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	128.00	129.00	1.00	<1.0	<0.01	0.00	0.00	<0.01	<1.0	0.01
BR-35-23	129.00	130.00	1.00	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	130.00	131.00	1.00	<1.0	<0.01	0.00	0.01	<0.01	<1.0	<0.01
BR-35-23	131.00	132.20	1.20	<1.0	<0.01	0.00	0.02	<0.01	<1.0	<0.01
BR-35-23	132.20	133.40	1.20	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	133.40	134.60	1.20	<1.0	0.02	0.00	0.00	<0.01	<1.0	0.01
BR-35-23	134.60	135.80	1.20	<1.0	0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	135.80	137.00	1.20	<1.0	0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	137.00	138.00	1.00	<1.0	0.01	0.01	0.00	<0.01	1.2	0.01
BR-35-23	138.00	139.00	1.00	<1.0	0.18	0.08	0.00	<0.01	<1.0	0.15
BR-35-23	139.00	140.00	1.00	<1.0	0.04	0.00	0.03	<0.01	<1.0	<0.01
BR-35-23	140.00	141.00	1.00	<1.0	0.05	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	141.00	142.00	1.00	<1.0	0.04	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	142.00	143.20	1.20	<1.0	0.06	0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	143.20	144.40	1.20	<1.0	0.08	0.02	0.00	<0.01	<1.0	<0.01
BR-35-23	144.40	145.60	1.20	<1.0	0.05	0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	145.60	146.80	1.20	<1.0	0.04	0.02	0.00	<0.01	<1.0	0.01
BR-35-23	146.80	148.00	1.20	<1.0	0.01	0.00	0.00	<0.01	1.0	<0.01
BR-35-23	148.00	149.00	1.00	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	149.00	150.00	1.00	<1.0	0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	150.00	150.80	0.80	<1.0	0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	150.80	151.40	0.60	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	151.40	152.50	1.10	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	152.50	153.50	1.00	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	153.50	154.30	0.80	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	154.30	155.50	1.20	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	155.50	156.50	1.00	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	156.50	157.50	1.00	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	157.50	158.50	1.00	<1.0	<0.01	0.00	0.11	<0.01	<1.0	<0.01
BR-35-23	158.50	159.65	1.15	<1.0	<0.01	0.00	0.00	<0.01	<1.0	<0.01
BR-35-23	159.65	160.30	0.65	12.0	0.01	0.12	0.00	<0.01	<1.0	<0.01
BR-35-23	160.30	161.20	0.90	<1.0	0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	161.20	162.40	1.20	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	162.40	163.40	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	0.01
BR-35-23	163.40	164.40	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	164.40	166.40	2.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	166.40	167.40	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	167.40	169.30	1.90	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	169.30	170.50	1.20	<1.0	0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	170.50	171.70	1.20	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	171.70	172.70	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	172.70	174.10	1.40	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	174.10	176.40	2.30	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	176.40	177.80	1.40	<1.0	<0.01	<0.01	0.00	0.01	1.4	<0.01
BR-35-23	177.80	179.00	1.20	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	179.00	180.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	180.00	181.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	181.00	182.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	182.00	183.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	183.00	184.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	184.00	185.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	185.00	186.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	186.00	187.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	187.00	188.10	1.10	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-35-23	188.10	189.20	1.10	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	189.20	190.40	1.20	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	190.40	191.60	1.20	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	191.60	192.80	1.20	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	192.80	194.00	1.20	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	194.00	195.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	195.00	196.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	196.00	197.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	197.00	198.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-35-23	198.00	199.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	199.00	200.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	200.00	201.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	201.00	202.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	202.00	203.20	1.20	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-35-23	203.20	204.40	1.20	<1.0	<0.01	<0.01	0.02	<0.01	63.8	<0.01
BR-35-23	204.40	205.30	0.90	<1.0	0.01	<0.01	0.01	<0.01	84.9	<0.01
BR-35-23	205.30	205.90	0.60	<1.0	0.03	0.01	0.02	<0.01	84.9	<0.01
BR-35-23	205.90	206.50	0.60	6.0	0.02	0.06	0.22	0.02	8.2	<0.01
BR-35-23	206.50	207.40	0.90	374.0	25.95	11.90	3.91	0.61	23.2	0.09
BR-35-23	207.40	208.20	0.80	572.0	27.17	11.25	3.55	0.62	21.6	0.16
BR-35-23	208.20	209.20	1.00	256.0	13.53	5.51	0.77	0.21	64.3	0.06
BR-35-23	209.20	210.00	0.80	1,654.0	30.17	21.14	4.17	2.26	13.5	0.40
BR-35-23	210.00	211.00	1.00	367.0	16.75	8.11	3.29	0.77	53.8	0.13
BR-35-23	211.00	212.00	1.00	171.0	15.63	8.04	1.84	0.75	56.6	0.08
BR-35-23	212.00	213.00	1.00	187.0	19.37	8.93	3.55	0.85	45.9	0.11
BR-35-23	213.00	213.70	0.70	82.0	12.99	3.52	1.47	0.42	69.2	0.05
BR-35-23	213.70	214.30	0.60	232.0	33.38	15.58	2.28	2.15	14.2	0.18
BR-35-23	214.30	215.00	0.70	235.0	39.25	17.66	2.45	2.70	8.4	0.21
BR-35-23	215.00	216.00	1.00	343.0	30.69	17.22	2.03	2.95	16.0	0.30
BR-35-23	216.00	217.00	1.00	232.0	39.24	19.94	2.82	3.28	7.5	0.09
BR-35-23	217.00	218.00	1.00	356.0	40.00	20.82	2.85	3.41	4.9	0.26
BR-35-23	218.00	219.00	1.00	375.0	38.71	19.19	2.02	2.83	8.9	0.25
BR-35-23	219.00	220.00	1.00	314.0	30.90	17.74	2.58	3.82	13.9	0.24
BR-35-23	220.00	221.00	1.00	173.0	27.48	13.48	1.46	2.41	19.5	0.09
BR-35-23	221.00	221.90	0.90	211.0	28.71	12.87	0.03	2.76	13.3	0.12
BR-35-23	221.90	222.80	0.90	144.0	15.84	9.09	1.25	3.03	15.2	0.12
BR-35-23	222.80	223.40	0.60	21.0	0.32	0.73	0.38	1.31	1.2	0.09
BR-35-23	223.40	224.20	0.80	29.0	2.00	1.24	0.33	0.92	1.2	0.07
BR-35-23	224.20	225.00	0.80	7.0	0.68	0.11	0.11	0.01	2.6	0.00
BR-35-23	225.00	226.00	1.00	5.0	0.41	0.10	0.06	0.11	<1.0	0.02
BR-35-23	226.00	227.00	1.00	<1.0	0.02	<0.01	0.04	0.01	<1.0	0.01
BR-35-23	227.00	227.60	0.60	<1.0	0.01	<0.01	0.05	0.01	<1.0	0.01
BR-35-23	227.60	228.20	0.60	5.0	0.42	0.15	0.07	0.14	<1.0	0.06
BR-35-23	228.20	229.40	1.20	<1.0	0.06	0.02	0.04	<0.01	<1.0	<0.01
BR-35-23	229.40	230.60	1.20	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-35-23	230.60	231.80	1.20	<1.0	0.01	<0.01	0.02	0.03	<1.0	0.01
BR-35-23	231.80	233.00	1.20	<1.0	0.05	0.01	0.05	0.02	<1.0	0.01
BR-35-23	233.00	234.10	1.10	<1.0	0.01	0.00	0.04	0.02	<1.0	0.01
BR-35-23	234.10	235.00	0.90	2.0	0.08	0.02	0.09	0.04	<1.0	0.01
BR-35-23	235.00	235.70	0.70	<1.0	0.08	0.01	0.07	<0.01	1.5	<0.01
BR-35-23	235.70	236.90	1.20	3.0	0.18	0.05	0.06	0.03	1.7	0.02
BR-35-23	236.90	238.00	1.10	3.0	0.32	0.10	0.08	0.01	2.6	<0.01
BR-35-23	238.00	239.00	1.00	<1.0	0.03	<0.01	0.11	<0.01	<1.0	<0.01
BR-35-23	239.00	240.00	1.00	<1.0	0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-35-23	240.00	241.20	1.20	14.0	0.38	0.20	0.10	0.21	<1.0	0.07
BR-35-23	241.20	242.20	1.00	<1.0	<0.01	<0.01	0.07	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-35-23	242.20	243.40	1.20	3.0	0.07	0.01	0.09	<0.01	<1.0	<0.01
BR-35-23	243.40	244.60	1.20	5.0	0.15	0.03	0.11	<0.01	<1.0	<0.01
BR-35-23	244.60	245.80	1.20	<1.0	0.04	<0.01	0.03	<0.01	<1.0	<0.01
BR-35-23	245.80	247.00	1.20	<1.0	0.04	<0.01	0.07	<0.01	<1.0	<0.01
BR-35-23	247.00	248.00	1.00	<1.0	0.03	<0.01	0.04	<0.01	<1.0	<0.01
BR-35-23	248.00	249.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-35-23	249.00	250.00	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-35-23	250.00	251.00	1.00	2.0	0.10	0.02	0.05	<0.01	<1.0	<0.01
BR-35-23	251.00	252.00	1.00	<1.0	0.08	0.01	0.05	<0.01	1.0	<0.01
BR-35-23	252.00	253.00	1.00	<1.0	0.04	0.01	0.06	<0.01	1.0	<0.01
BR-35-23	253.00	254.20	1.20	<1.0	0.01	<0.01	0.06	<0.01	<1.0	<0.01
BR-35-23	254.20	255.40	1.20	<1.0	0.03	<0.01	0.03	<0.01	<1.0	<0.01
BR-35-23	255.40	256.60	1.20	<1.0	0.16	<0.01	0.03	<0.01	<1.0	<0.01
BR-35-23	256.60	257.80	1.20	4.0	0.25	0.01	0.02	0.01	<1.0	0.01
BR-35-23	257.80	259.00	1.20	<1.0	0.15	0.00	0.02	<0.01	<1.0	<0.01
BR-35-23	259.00	260.00	1.00	3.0	0.28	0.01	0.02	<0.01	<1.0	0.01
BR-35-23	260.00	261.00	1.00	<1.0	0.04	<0.01	0.01	<0.01	<1.0	0.01
BR-35-23	261.00	262.00	1.00	<1.0	0.09	<0.01	0.03	<0.01	<1.0	<0.01
BR-35-23	262.00	263.00	1.00	<1.0	0.02	<0.01	0.01	<0.01	<1.0	<0.01
BR-35-23	263.00	264.00	1.00	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-35-23	264.00	265.00	1.00	3.0	0.59	0.19	0.01	<0.01	<1.0	0.01
BR-35-23	265.00	266.00	1.00	2.0	0.11	0.10	0.02	<0.01	<1.0	<0.01
BR-35-23	266.00	267.00	1.00	3.0	0.06	0.09	0.02	<0.01	<1.0	0.01
BR-35-23	267.00	268.00	1.00	<1.0	0.03	<0.01	0.02	<0.01	<1.0	<0.01
BR-35-23	268.00	269.00	1.00	<1.0	<0.01	<0.01	0.06	<0.01	<1.0	<0.01
BR-35-23	269.00	270.00	1.00	<1.0	0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-35-23	270.00	271.00	1.00	<1.0	0.03	<0.01	0.02	<0.01	<1.0	<0.01
BR-35-23	271.00	272.20	1.20	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-36-23	0.00	40.50	40.50	Interval not sampled						
BR-36-23	40.50	42.30	1.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	42.30	43.70	1.40	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	43.70	44.70	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	44.70	46.00	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	46.00	47.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	47.00	48.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	48.00	49.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	49.00	50.10	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	50.10	51.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	51.00	52.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	52.00	53.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	53.20	54.00	0.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	54.00	55.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	55.00	56.00	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	56.00	57.80	1.80	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	57.80	59.30	1.50	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	59.30	60.30	1.00	<1.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	60.30	61.50	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	61.50	62.20	0.70	<1.0	<0.01	0.01	<0.01	0.01	<1.0	<0.01
BR-36-23	62.20	63.30	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	63.30	64.60	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	64.60	66.10	1.50	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	66.10	67.00	0.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	67.00	68.30	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	68.30	71.30	3.00	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	71.30	72.50	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-36-23	72.50	73.70	1.20	<1.0	0.01	0.01	0.01	<0.01	<1.0	0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-36-23	73.70	75.00	1.30	<1.0	0.01	0.02	<0.01	<0.01	<1.0	0.01
BR-36-23	75.00	77.00	2.00	<1.0	0.00	0.01	<0.01	<0.01	<1.0	0.02
BR-36-23	77.00	78.00	1.00	7.0	0.07	0.41	0.02	0.02	<1.0	0.03
BR-36-23	78.00	79.00	1.00	4.0	0.03	0.15	0.41	0.03	21.3	0.03
BR-36-23	79.00	80.00	1.00	<1.0	<0.01	0.03	0.02	0.01	<1.0	0.09
BR-36-23	80.00	80.90	0.90	4.0	0.07	0.05	0.02	0.01	<1.0	0.02
BR-36-23	80.90	81.90	1.00	1.0	0.05	0.01	<0.01	<0.01	1.0	0.01
BR-36-23	81.90	83.00	1.10	5.0	0.01	0.17	0.03	0.03	<1.0	0.03
BR-36-23	83.00	84.00	1.00	<1.0	<0.01	0.02	0.02	<0.01	1.5	<0.01
BR-36-23	84.00	85.00	1.00	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-36-23	85.00	86.00	1.00	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-36-23	86.00	87.00	1.00	2.0	0.02	<0.01	0.21	0.13	12.6	0.06
BR-36-23	87.00	88.00	1.00	<1.0	<0.01	<0.01	0.27	<0.01	<1.0	<0.01
BR-36-23	88.00	89.20	1.20	<1.0	<0.01	<0.01	0.07	<0.01	<1.0	<0.01
BR-36-23	89.20	90.00	0.80	<1.0	<0.01	<0.01	0.10	<0.01	<1.0	<0.01
BR-36-23	90.00	92.70	2.70	<1.0	0.01	0.01	0.13	0.02	5.6	0.01
BR-36-23	92.70	94.90	2.20	<1.0	0.03	0.04	0.13	0.07	1.5	0.04
BR-36-23	94.90	96.00	1.10	<1.0	0.00	<0.01	0.00	<0.01	<1.0	<0.01
BR-36-23	96.00	97.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-36-23	97.00	98.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-36-23	98.00	99.00	1.00	<1.0	<0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-36-23	99.00	99.90	0.90	5.0	0.09	0.05	0.26	0.55	34.0	0.32
BR-36-23	99.90	101.10	1.20	6.0	0.01	0.08	0.17	0.03	2.9	0.05
BR-36-23	101.10	102.20	1.10	4.0	<0.01	0.19	0.19	0.03	2.8	0.06
BR-36-23	102.20	103.20	1.00	6.0	0.11	0.07	0.13	0.64	22.2	0.41
BR-36-23	103.20	104.20	1.00	3.0	0.02	0.02	0.18	0.13	2.9	0.05
BR-36-23	104.20	105.00	0.80	3.0	0.01	0.01	0.30	0.11	5.8	0.05
BR-36-23	105.00	106.00	1.00	<1.0	<0.01	0.01	0.11	<0.01	<1.0	0.01
BR-36-23	106.00	107.00	1.00	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-36-23	107.00	108.00	1.00	<1.0	<0.01	0.01	0.10	0.01	7.2	0.02
BR-36-23	108.00	109.00	1.00	2.0	0.02	<0.01	0.06	0.19	27.3	0.14
BR-36-23	109.00	110.00	1.00	2.0	0.04	0.01	0.07	<0.01	<1.0	<0.01
BR-36-23	110.00	111.00	1.00	<1.0	0.02	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	111.00	113.00	2.00	<1.0	0.04	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	113.00	114.00	1.00	<1.0	0.03	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	114.00	115.20	1.20	<1.0	0.05	0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	115.20	116.30	1.10	<1.0	0.02	<0.01	<0.01	<0.01	2.7	<0.01
BR-36-23	116.30	117.20	0.90	<1.0	0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	117.20	118.20	1.00	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	118.20	119.10	0.90	<1.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	119.10	120.30	1.20	<1.0	0.01	<0.01	<0.01	<0.01	1.2	<0.01
BR-36-23	120.30	121.50	1.20	<1.0	0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	121.50	122.70	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	122.70	123.90	1.20	<1.0	0.02	0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	123.90	125.00	1.10	<1.0	0.03	0.00	<0.01	<0.01	<1.0	<0.01
BR-36-23	125.00	126.00	1.00	<1.0	0.03	0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	126.00	127.00	1.00	<1.0	0.02	0.00	<0.01	<0.01	<1.0	<0.01
BR-36-23	127.00	128.00	1.00	<1.0	0.03	0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	128.00	129.00	1.00	3.0	0.03	0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	129.20	130.90	1.70	8.0	<0.01	0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	130.90	133.60	2.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	0.01
BR-36-23	133.60	135.30	1.70	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	135.30	136.40	1.10	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	136.40	137.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	137.60	138.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	138.80	140.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-36-23	140.00	141.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	141.20	142.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	142.40	144.30	1.90	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	144.30	145.50	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	145.50	146.80	1.30	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	146.80	148.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	148.00	149.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	149.20	150.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	150.40	151.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	151.60	152.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	152.80	154.00	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	154.00	155.20	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	155.20	156.40	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	156.40	157.60	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	157.60	158.80	1.20	<1.0	<0.01	<0.01	<0.01	<0.01	<1.0	<0.01
BR-36-23	158.80	159.90	1.10	<1.0	<0.01	0.01	<0.01	0.01	8.4	<0.01
BR-36-23	159.90	160.50	0.60	<1.0	<0.01	<0.01	<0.01	<0.01	84.9	<0.01
BR-36-23	160.50	161.50	1.00	<1.0	<0.01	<0.01	<0.01	<0.01	84.9	<0.01
BR-36-23	161.50	162.20	0.70	<1.0	<0.01	<0.01	<0.01	<0.01	84.9	<0.01
BR-36-23	162.20	162.80	0.60	<1.0	0.05	0.05	0.04	0.01	46.9	<0.01
BR-36-23	162.80	163.80	1.00	7.0	0.04	3.49	0.22	0.01	66.1	<0.01
BR-36-23	163.80	164.60	0.80	52.0	0.06	6.05	0.30	0.01	79.4	<0.01
BR-36-23	164.60	165.50	0.90	611.0	10.72	31.69	8.25	2.48	17.1	0.04
BR-36-23	165.50	166.30	0.80	382.0	2.03	22.92	3.97	0.90	42.9	0.01
BR-36-23	166.30	167.20	0.90	321.0	3.81	11.84	3.03	0.56	63.5	0.02
BR-36-23	167.20	168.00	0.80	310.0	3.92	11.00	2.51	0.61	58.9	0.06
BR-36-23	168.00	168.80	0.80	205.0	8.64	10.53	4.30	0.58	52.8	0.02
BR-36-23	168.80	169.70	0.90	1,343.0	18.29	24.57	15.40	3.41	16.4	0.33
BR-36-23	169.70	170.40	0.70	1,439.0	23.12	19.15	12.80	3.95	15.7	0.92
BR-36-23	170.40	171.00	0.60	1,974.0	18.39	22.48	8.60	6.69	4.3	1.47
BR-36-23	171.00	171.90	0.90	1,692.0	25.80	18.95	10.00	5.95	7.3	1.33
BR-36-23	171.90	172.90	1.00	566.0	5.84	40.00	3.78	3.82	3.6	0.19
BR-36-23	172.90	173.80	0.90	349.0	10.23	16.46	2.01	1.74	3.6	0.08
BR-36-23	173.80	174.30	0.50	107.0	5.83	2.95	0.65	0.53	7.1	0.06
BR-36-23	174.30	175.00	0.70	39.0	2.64	1.11	0.16	0.11	<1.0	0.01
BR-36-23	175.00	175.50	0.50	58.0	6.85	5.70	0.51	0.94	<1.0	0.06
BR-36-23	175.50	175.90	0.40	45.0	0.59	2.07	0.44	5.61	1.3	0.28
BR-36-23	175.90	176.60	0.70	25.0	0.61	0.22	0.53	3.75	<1.0	0.25
BR-36-23	176.60	177.00	0.40	63.0	0.61	0.60	2.18	7.10	<1.0	0.50
BR-36-23	177.00	178.00	1.00	11.0	0.84	0.87	0.30	0.12	<1.0	0.02
BR-36-23	178.00	179.00	1.00	5.0	0.28	0.19	0.21	0.01	<1.0	0.00
BR-36-23	179.00	180.00	1.00	<1.0	<0.01	0.00	0.11	0.02	<1.0	0.01
BR-36-23	180.00	181.00	1.00	7.0	0.33	0.17	0.22	0.04	<1.0	0.02
BR-36-23	181.00	182.00	1.00	<1.0	0.04	0.00	0.10	0.01	<1.0	<0.01
BR-36-23	182.00	183.00	1.00	3.0	0.08	0.04	0.10	0.03	<1.0	0.01
BR-36-23	183.00	184.20	1.20	<1.0	0.01	<0.01	0.10	<0.01	<1.0	<0.01
BR-36-23	184.20	185.40	1.20	<1.0	0.06	0.01	0.09	<0.01	<1.0	<0.01
BR-36-23	185.40	186.60	1.20	<1.0	0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-36-23	186.60	187.80	1.20	<1.0	0.05	<0.01	0.04	0.01	<1.0	<0.01
BR-36-23	187.80	189.00	1.20	2.0	0.12	0.02	0.05	0.01	<1.0	0.01
BR-36-23	189.00	190.00	1.00	2.0	0.30	0.05	0.06	<0.01	<1.0	0.00
BR-36-23	190.00	191.00	1.00	17.0	0.38	0.73	0.07	0.36	<1.0	0.10
BR-36-23	191.00	191.90	0.90	11.0	1.54	0.60	0.09	0.05	<1.0	0.01
BR-36-23	191.90	193.00	1.10	<1.0	0.23	0.06	0.03	0.01	2.1	0.01
BR-36-23	193.00	194.00	1.00	3.0	1.03	0.23	0.04	0.02	3.8	0.01
BR-36-23	194.00	195.00	1.00	<1.0	0.33	0.09	0.03	0.05	<1.0	0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-36-23	195.00	196.00	1.00	<1.0	0.37	0.04	0.03	<0.01	3.5	0.01
BR-36-23	196.00	197.00	1.00	<1.0	0.39	0.02	0.02	<0.01	5.8	0.01
BR-36-23	197.00	198.00	1.00	<1.0	0.12	0.01	0.03	<0.01	<1.0	<0.01
BR-36-23	198.00	198.90	0.90	<1.0	0.64	0.01	0.20	<0.01	5.8	<0.01
BR-36-23	198.90	200.00	1.10	2.0	0.49	0.12	0.04	0.01	<1.0	0.01
BR-36-23	200.00	201.00	1.00	1.0	0.12	0.01	0.11	0.01	1.8	<0.01
BR-36-23	201.00	202.10	1.10	7.0	0.19	0.69	0.03	0.02	1.7	0.01
BR-36-23	202.10	203.20	1.10	<1.0	0.03	0.07	0.06	<0.01	0.5	0.00
BR-36-23	203.20	204.30	1.10	2.0	0.13	0.08	0.09	0.01	1.6	<0.01
BR-36-23	204.30	205.40	1.10	28.0	4.06	2.96	0.23	0.17	<1.0	0.13
BR-36-23	205.40	206.30	0.90	<1.0	0.04	0.01	0.03	<0.01	<1.0	<0.01
BR-36-23	206.30	207.50	1.20	<1.0	0.02	0.00	0.05	<0.01	<1.0	<0.01
BR-36-23	207.50	208.60	1.10	<1.0	0.65	0.18	0.05	0.03	<1.0	0.02
BR-36-23	208.60	209.80	1.20	<1.0	0.40	0.15	0.20	0.03	<1.0	0.02
BR-36-23	209.80	211.00	1.20	<1.0	0.04	<0.01	0.04	<0.01	<1.0	<0.01
BR-36-23	211.00	212.20	1.20	<1.0	0.02	<0.01	0.03	<0.01	<1.0	<0.01
BR-36-23	212.20	213.40	1.20	<1.0	0.02	<0.01	0.04	<0.01	<1.0	<0.01
BR-36-23	213.40	214.60	1.20	<1.0	0.22	0.13	0.06	<0.01	<1.0	0.01
BR-36-23	214.60	215.80	1.20	3.0	0.95	0.24	0.02	0.04	<1.0	0.03
BR-36-23	215.80	217.00	1.20	16.0	0.24	1.77	0.21	0.11	1.2	0.07
BR-36-23	217.00	218.00	1.00	<1.0	1.27	0.18	0.04	<0.01	<1.0	<0.01
BR-36-23	218.00	219.00	1.00	<1.0	0.11	0.01	0.13	<0.01	1.0	<0.01
BR-36-23	219.00	220.00	1.00	<1.0	0.09	0.19	0.05	<0.01	<1.0	<0.01
BR-36-23	220.00	220.80	0.80	<1.0	0.05	<0.01	0.07	<0.01	1.3	0.01
BR-36-23	220.80	221.30	0.50	10.0	0.55	0.17	0.45	0.26	<1.0	0.09
BR-36-23	221.30	222.50	1.20	<1.0	0.33	0.02	0.13	0.01	<1.0	0.01
BR-36-23	222.50	223.70	1.20	<1.0	0.01	0.02	0.03	<0.01	<1.0	<0.01
BR-36-23	223.70	224.60	0.90	<1.0	0.14	0.02	0.06	<0.01	2.3	<0.01
BR-36-23	224.60	225.60	1.00	4.0	0.05	0.04	0.08	0.06	<1.0	0.04
BR-36-23	225.60	226.80	1.20	13.0	1.97	0.52	0.06	0.08	2.7	0.06
BR-36-23	226.80	228.00	1.20	<1.0	0.34	0.12	0.04	<0.01	<1.0	0.01
BR-36-23	228.00	229.00	1.00	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-36-23	229.00	230.00	1.00	<1.0	0.02	<0.01	0.03	<0.01	<1.0	<0.01
BR-36-23	230.00	231.00	1.00	<1.0	0.02	<0.01	0.03	<0.01	<1.0	<0.01
BR-36-23	231.00	232.20	1.20	<1.0	0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-36-23	232.20	233.40	1.20	<1.0	<0.01	<0.01	0.06	<0.01	<1.0	<0.01
BR-36-23	233.40	234.50	1.10	<1.0	0.01	<0.01	0.07	<0.01	<1.0	<0.01
BR-36-23	234.50	235.50	1.00	<1.0	0.01	<0.01	0.06	<0.01	<1.0	<0.01
BR-36-23	235.50	236.50	1.00	<1.0	0.08	0.02	0.04	<0.01	<1.0	<0.01
BR-36-23	236.50	237.60	1.10	2.0	0.20	0.05	0.05	<0.01	<1.0	<0.01
BR-36-23	237.60	238.50	0.90	31.0	2.99	0.94	0.11	0.12	4.2	0.05
BR-36-23	238.50	239.20	0.70	68.0	4.17	2.16	0.17	0.21	6.5	0.09
BR-36-23	239.20	240.40	1.20	12.0	0.92	0.36	0.07	0.04	<1.0	0.02
BR-36-23	240.40	241.60	1.20	<1.0	0.08	0.03	0.11	<0.01	<1.0	<0.01
BR-36-23	241.60	242.80	1.20	<1.0	0.03	0.01	0.10	<0.01	<1.0	<0.01
BR-36-23	242.80	244.00	1.20	<1.0	<0.01	<0.01	0.07	<0.01	<1.0	<0.01
BR-36-23	244.00	245.00	1.00	<1.0	<0.01	<0.01	0.06	<0.01	<1.0	<0.01
BR-36-23	245.00	246.00	1.00	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-36-23	246.00	247.00	1.00	<1.0	0.02	<0.01	0.05	<0.01	<1.0	<0.01
BR-36-23	247.00	248.00	1.00	<1.0	0.01	<0.01	0.05	<0.01	<1.0	<0.01
BR-36-23	248.00	249.00	1.00	<1.0	0.04	0.12	0.05	<0.01	<1.0	<0.01
BR-36-23	249.00	250.00	1.00	<1.0	0.01	<0.01	0.11	<0.01	<1.0	<0.01
BR-36-23	250.00	251.00	1.00	<1.0	0.02	0.02	0.05	<0.01	<1.0	<0.01
BR-36-23	251.00	252.00	1.00	<1.0	<0.01	0.16	0.02	<0.01	<1.0	<0.01
BR-36-23	252.00	253.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01
BR-36-23	253.00	254.00	1.00	<1.0	<0.01	<0.01	0.00	<0.01	<1.0	<0.01



Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Zn (%)	Pb (%)	Au (g/t)	Cu (%)	BaSO ₄ (%)	Sb (%)
BR-36-23	254.00	255.20	1.20	<1.0	<0.01	<0.01	0.04	<0.01	<1.0	<0.01
BR-36-23	255.20	256.40	1.20	<1.0	<0.01	<0.01	0.01	<0.01	<1.0	<0.01
BR-36-23	256.40	257.60	1.20	<1.0	0.01	<0.01	0.05	<0.01	<1.0	<0.01
BR-36-23	257.60	258.80	1.20	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-36-23	258.80	260.00	1.20	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-36-23	260.00	261.00	1.00	<1.0	0.01	<0.01	0.02	<0.01	<1.0	<0.01
BR-36-23	261.00	262.20	1.20	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01
BR-36-23	262.20	263.30	1.10	<1.0	<0.01	<0.01	0.03	<0.01	<1.0	<0.01

APPENDIX 2: JORC TABLES

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>	Drill core samples were collected from half cut PQ3 and HQ3 diameter core, where the core was sawn exactly in half along a pre-defined cutting line. The half core samples, typically weighing between 4-12kg, were placed into labelled and tagged sample bags prior to dispatch to the SGS Ankara laboratory in Turkey. Sample intervals were determined by the geologist, routinely at nominal 1m intervals unless selectively sampled on narrower intervals where geological boundaries exist to a minimum length of 0.2 m. A maximum sample size of 1.2 m is used when sampling geological contacts. Portable XRF is used to confirm sulphides and barite quantities in core. pXRF results are used for indicative purposes only and not as final assay.
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	Sample intervals were selected by the logging geologist based on geological criteria or using a nominal 1m sample length in homogenous massive sulphide ore. A minimum sample length of 0.2 m is employed where necessary. Sampling is based on visually mineralized intervals, with a calibrated portable XRF device used only as a guide. pXRF is calibrated using standards daily when in use.
	<i>Aspects of the determination of mineralization that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g., 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralization types (e.g. submarine nodules) may warrant disclosure of detailed information.</i>	For drill hole analyses, diamond drilling was used to obtain 4 to 12kg samples, crushed, pulverized and split for Fire Assay (30g charge), ICP-AES and ICP-MS, AAS, XRF and 4-acid digest using external laboratories and certified laboratory methods. Prior to October 2022, samples were dispatched by dedicated road transport to ALS Bor in Serbia for sample prep, splitting and analysis across several ALS labs (Ireland and Romania). From October 2022 core samples were sent to SGS Ankara, Turkey by truck for sample preparation (SGS Code PRP89), gold analysis by 30-gram fire assay with AA finish (SGS code FAA303), base and precious metal as well as multi-element analyses using a 4-Acid Digest with ICP-AES finish (code ICM40B). AAS was used for over-detection limit analysis of base metals. Barite was assayed using lithium borate fusion prior to acid dissolution and ICP-MS analysis (SGS code ICP95A). Overlimit Barium (>10%) results were analysed using portable pXRF (SGS code pXRF73C27) and the results above detection limit (50%) sent to SGS Lakefield, Canada by air freight for whole-rock XRF analysis (SGS Code GC_XR76V).
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth</i>	All drill holes were drilled using PQ3 and HQ3 diameter core. All drill holes were drilled by drilling contractor Drillex BH d.o.o., a division of Drillex International.



Section 1 Sampling Techniques and Data
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
	<i>of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	PQ3 and HQ3 core was held in a core barrel by a stainless steel “split” inner tube. The use of the inner tube ensured that all core maintained its orientation prior to removal into the core trays. Drill core was stored in suitable core boxes and stacked on the premises of the secure exploration facility in Vares. All drill holes were surveyed at 9 m and every 30 m thereafter by a Reflex “Ezy-Track” digital down-hole survey tool to end of 2022. As of 2023, all holes have been surveyed using the Reflex ‘Sprint IQ’ and ‘Omni’ on the fly north seeking non-magnetic gyroscopic tools at 5 m intervals in and 10 m out of holes. No significant deviation or drilling problems have been identified. Representatives from Reflex have been to drill rigs to calibrate, check and train on correct usage of tools.
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	All core was geotechnically logged to verify drillers blocks, record run length, recovered length, core recovery (%) and RQD.
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	There is no observed relationship between sample recovery and grade, and no significant loss of core. No sample bias has been identified. Core recoveries are generally >90%
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	Diamond drill core samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Not all drill holes penetrated the massive sulphide mineralization, but all were used to guide the geological interpretations supporting the Mineral Resource estimates.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	All core is photographed. Core logging is both qualitative and quantitative. Logging records lithology, alteration, structures, veining, sulphide minerals and percentages.
	<i>The total length and percentage of the relevant intersections logged.</i>	100% of drill core is logged.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	Drill core was cut in half using an Almonte automatic diamond core saw. Nominally 1 in 30 samples were cut in quarters, and both halves analysed (for purposes of field duplicates).
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	Not applicable, as all samples are core.
	<i>For all sample types, the nature, quality, and appropriateness of the sample preparation technique.</i>	Collection of around 4-12kg of HQ and PQ half core material with subsequent pulverisation of the total charge provided an appropriate and representative sample for analysis. Generally 4-6kg for HQ core and 6-12kg for PQ. Prior to October 2022, sample preparation was undertaken at the ALS laboratory in Bor, Serbia to industry best practice. From October 2022, sample preparation was undertaken at the SGS Laboratory in Ankara, Turkey to industry best practice.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	Whole rock blanks and certified standards (~1 in 15) were introduced to the sample stream as a QAQC check on laboratory processes. Industry best practice was adopted by ALS and SGS for laboratory sub-sampling and the avoidance of any cross contamination. ALS + SGS inserted internal controls and cleaned all sampling equipment with a barren quartz rock every 20 samples. All sample preparation stations and equipment were compressed air cleaned after every sample. A QAQC inspection of ALS (Bor) and SGS (Ankara) facilities was completed in October 2022 by Adriatic Metals (S. Smolonogov) with practices found to be in line with industry best practice.
	<i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i>	The half-core sampling is considered a reasonable representation of the in-situ material. Nominally 1 in 30 samples were cut in quarters, and both halves analysed (for purposes of field duplicates). All field duplicate, coarse duplicate and pulp duplicates are reviewed and compared. Standards and Blanks are investigated if over 2SD (2 Standard Deviations) from certified mean and re-assay initiated if over 3SD or as required when over 2SD to validate materials either side of poorly performing blanks or standards. QAQC outcomes are checked on assay receipt by Adriatic Metals and before acceptance into the



Section 1 Sampling Techniques and Data
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
		Database. A dedicated Data Geologist with support from consultants gDAT monitor all received QAQC data as it arrives.
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	Sample size of around 4-12kg is appropriate and found to reasonably represent the material being tested. There is acceptable repeatability of multiple economic elements. 4-6kg for HQ and 6-12kg for PQ.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	Prior to October 2022, primary analysis was completed through ALS Laboratories. With Sample preparation as ALS Bor, Serbia with splitting and sending pulps to Loughrea, Ireland and Rosa Montana, Romania. From October 2022, primary sample preparation and analysis was completed by SGS Laboratory in Ankara, Turkey All facilities are industry best practice and ISO certified. Multi elements were assayed by an ICP-AES technique following a four-acid digest. Gold was determined using a fire assay on nominal 30g charges. Barite was determined from a lithium meta-borate fusion followed by dissolution and ICP-AES analysis. Total carbon and sulphur were determined by a Leco analyser. All techniques were appropriate for the elements being determined. Use of a 4-Acid digest is a near-total digestion of all minerals present. Additional pXRF and whole rock XRF analysis is required to determine accurate concentrations of barium as part of reported assays. Whole rock XRF analysis is completed at Lakefield Canada. Initiation of a gravimetric finish was initiated at start of Q2 2023. Gold results ≥ 3.00 g/t are re-assayed by fire assay with gravimetric finish at SGS Ankara laboratory.
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	There was no reliance on determination of analysis by geophysical tools. All analyses as reported and used in any calculations are by ISO certified laboratories, (ALS – Bor, Loughrea, Rosa Montana; SGS Ankara), using calibrated, industry standard and recognized methods, QAQC and equipment. A Hitachi X-Met 8000 hand-held pXRF analyser is used to rapidly define metal and barite abundance during logging, field mapping and sampling. Results are not used in resource estimates or publicly reported.
	<i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	Certified Reference Materials (“CRM’s”), certified blanks, quarter core replicates were used and considered to be appropriate for the elements being analysed. CRM’s, blanks, and replicates were added at a rate better than 1 in 15. All results reported by SGS on the CRMs and blanks were within 3 standard deviations (3SD). Where deviations greater than 2SD were noted, investigations were completed and where necessary samples above and below queried Standards and Blanks were re-assayed. To date returned results are considered to be representative of material sampled. A program of 5% of assay pulps are submitted for Umpire lab re-assay. The program is continuous and ongoing as part of QAQC controls in addition to measures already in place. ACME Laboratory (Bureau Veritas) in Ankara, Turkey is used as the current independent Umpire Laboratory replicating 5% of pulp duplicate results for QAQC. ACME commenced QAQC work on exploration drilling samples as of 2023. Prior to 2023, the SGS Bor, Serbia assay laboratory has been used as the independent Umpire laboratory for primary samples returned from ALS Bor, Serbia. ALS previously completed primary analysis using multiple facilities with sample preparation at ALS Bor, Serbia; base metals analysis at ALS Loughrea Ireland; gold at ALS Rosa Montana Romania.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	Significant mineralization is reviewed internally by multiple Senior geological staff, the Vares Project Exploration Manager, and Head of Exploration. Significant intercepts are visually verified daily as core is brought in for logging, included in summary logs, and then cross-checked during detailed logging. Tenor and confirmation of mineralization and barite content is checked by portable XRF (Hitachi X-Met 8000). Mineralized intervals are regularly viewed and verified by geosciences qualified and certified investors and analysts. Recent drill core is presented in fully marked-out core boxes and with full assay data provided for correlation with drilled intercepts.



Section 1 Sampling Techniques and Data
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
		Independent relogging of select mineralized and non-mineralized drill core has been completed by multiple consultants involved in technical studies including Elizabeth Thompson (Structural Consultant – Transition Elements), Joe Crummy (ARD Consultant – JC Consulting), Joe Burke (Geotechnical Consultant – Avoca Geotechnical) and others.
	<i>The use of twinned holes.</i>	Several twinned holes have been completed, with separation between holes reduced to within 15 m. Several cross-holes have also been drilled from adjacent drill platforms, passing through the trace of previous holes and at near right angle cutting previously intercepted mineralization. Confirming position, grade, and thickness. In general, holes completed are part of tight ‘drill fans’ with separation of holes between fans of 25 m to 30 m with respect to targeted ore zones. Separation distances are <25 m between holes closer to surface and the collars of fan holes drilled from the same drill platform. In 2023 in areas referred to as the Rupice Northwest Western Zone, and Rupice Northwest Lower Zone, hole spacings have been reduced to nominally <20 m between mineralized intercepts. This is due to the increased folding and faulting seen in these areas requiring closer spaced drilling to resolve geology.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	Data are stored in a Cloud Server with server back-ups at various locations including Vares, Bosnia & Herzegovina and Cheltenham, UK. The data and databases are managed by consultants gDat Data Solutions in an acQuire database. The acQuire database is regularly backed-up. There is a dedicated Data Geologist and a Junior Data Geologist within Exploration managing and ensuring the QAQC of all daily geological inputs and outputs from the database and various software (downhole survey, surface survey, audits, drilling data, logging, sampling, sample dispatch, assaying and assay QAQC). gDat interfaces daily with the site Data Geologists.
	<i>Discuss any adjustment to assay data.</i>	No adjustments were necessary.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	Sampling sites were surveyed using Total Station to better than 0.05 m accuracy in the local BiH coordinate system. A Reflex TN4 north seeking, gyroscopic rig alignment tool was used as of 2023 for precision alignment of holes at the collar. The TN14 is mounted on the rod string with preset mast dip and hole azimuth referenced to grid north converted from UTM. Mast and rig are moved till TN14 reads that the rod string is aligned to set dip and direction. The TN14 can also be used in place of the Total Station or as a check of the Total Station collar set-up survey accuracy.
	<i>Specification of the grid system used.</i>	The grid system used MGI 1901 / Balkans Zone 6.
	<i>Quality and adequacy of topographic control.</i>	The topographic surface of the immediate area was generated from a LiDAR survey to an accuracy of approximately 0.05 m. It is considered sufficiently accurate for the Company's current activities. All drill collars have been compared to the LiDAR surface and physically validated where discrepancies in elevation or position were noted. Validation has been periodically required in mountainous terrain where holes post-date LiDAR and earthworks have been completed to establish drill pads.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i>	Drill hole spacing does not exceed 50 m which is considered acceptable for reporting exploration results. The nominal drill spacing is on 40 m spaced sections. The primary method of drilling is to complete holes from a single drill platform in mountainous terrain. Holes are drilled as part of a ‘fan’ of holes. Design of holes aims to achieve a nominal 25 m to 30 m separation between mineralized zones to achieve either an Inferred or Indicated level of exploration confidence.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	Drill hole spacing is deemed sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource classification to be applied. The data spacing is suitable for a stratabound, continuous style of polymetallic mineralization with minimal structural disturbance or remobilisation. Where structural complexity is noted (RNW Western and Lower Zones), drill hole spacing is reduced to ≤20 m.



Section 1 Sampling Techniques and Data
(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
	<i>Whether sample compositing has been applied.</i>	Sample compositing was not applied. Currently reported results are on a nominal 1m spacing unless samples have been character sampled or extended to visual contacts. Minimum sample size is 0.2 m and maximum is 1.2 m unless there has been low sample recovery.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	Drill holes have been drilled at dips of between -45 to -90° from surface. The mineralized body is generally shallow dipping to the NE and plunging to the NW at angles of 30 to 40 degrees. Current drilling intersects mineralization at generally a high oblique angle. New drilling in the RNW Lower Zone has seen mineralization approach subvertical angles. Drilling in these areas has been at right angles to steep mineralization and from 45 to 60 degrees allowing multiple holes to transect steeper mineralization over a vertical elevation spread of holes.
	<i>If the relationship between the drilling orientation and the orientation of key mineralized structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	It is not considered that the drilling orientation has introduced a sampling bias, as the drilling is considered to be orthogonal to the stratabound mineralization, or close to it.
Sample security	<i>The measures taken to ensure sample security.</i>	Chain of Custody of digital data is managed by the Company. Physical material was stored on site and, when necessary, delivered to the assay laboratory. Thereafter laboratory samples were controlled by the nominated laboratory. All sample collection was controlled by digital sample control file(s) and hard-copy ticket books. Transfer of samples to laboratories is by a dedicated enclosed commercial truck. No other freight is included with shipments. Weigh-bills are used as are multiple customs declarations. Dispatched samples have sample tickets included, are referenced to a pre-dispatch sample submission sheet, and are cross-checked on receipt at laboratory. To date no discrepancies, sample loss or tampering with samples has been recorded.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	Laboratory reviews of SGS Ankara, Turkey; ALS Bor Serbia; SGS Bor, Serbia; ACME (Bureau Veritas) Ankara, Turkey were completed by Sergei Smolonogov (MAIG, RPGE), Head of Exploration of Adriatic Metals, in October 2022 and SGS + ACME Lab in Ankara in February 2023. There were no material issues found. Items for laboratory improvement were noted but were not considered material to sample QAQC outcomes. As a result of Adriatic Metals audit, SGS Ankara has renovated and installed vacuum dust extraction enclosed workstations (crushers, pulverisers, splitters) to reduce sample contamination risks in sample preparation. Changes effective as of February 2023.

Section 2 Reporting of Exploration Results
(Criteria in this section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	The Rupice deposit is located within the Company's 100% owned Concession, No. 04-18-21389-1/13, located 13km west of Vares in Bosnia. There are no known material issues with any third party other than royalties due to the State.
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	The Concession is in good standing with the governing authority and there is no known impediment to the Concession remaining in force until 2038 (25 years), subject to meeting all necessary reporting requirements.
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	Modern exploration commenced with the work of Energoinvest in the late 1960s. During 1968-1969 underground development of 455m of drives and cross cuts were made, and 11 surface trenches dug for a total length of 93.5m. Between 1980 and 1989, 49 holes were drilled for an advance of 5,690.8m. Sample material from all of these programs was routinely analysed for lead, zinc, and barite, and on occasion silver and gold. The deposit was the subject of a number of reserve estimates in the 1980s.



Section 2 Reporting of Exploration Results

(Criteria in this section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
		This work is documented in many reports which are certified by those geoscientists and Institutes that undertook the work. The work is considered to be of a standard equal to that found within today's exploration industry.
Geology	<i>Deposit type, geological setting and style of mineralization.</i>	The host rocks at Rupice comprise Middle Triassic limestone, dolostone, calcareous and dolomitic marl, and a range of mostly fine-grained siliciclastic rocks including cherty mudstone, mudstone, siltstone and fine-grained sandstone. The main mineralized horizon is a brecciated dolomitic unit that dips at around 50° to the northeast and has been preferentially mineralized with base, precious and transitional metals. The Triassic and Jurassic sequences have been deformed by early-stage ductile shearing and late stage brittle faulting. The Rupice polymetallic mineralization consists of sphalerite, galena, barite and chalcopyrite with gold, silver, tetrahedrite, boulangerite and bournonite, with pyrite. The majority of the high-grade mineralization is hosted within a brecciated dolomitic unit, which is interpreted to be cross-cut by northwest striking, westerly dipping syn-post mineral faulting. Thickening of the central portion of the orebody occurs in an area of structural complexity. Mineralized widths of up to 65m true thickness are seen in the central portion of the orebody. To date, the massive sulphide mineralization at Rupice has a defined strike length of 650m, with an average true-width thickness of around 20m. However, recent drilling northwest of Rupice has intercepted a massive sulphide body referred to as Rupice Northwest (RNW). RNW is not connected to Rupice mineralization. RNW is at a stratigraphically lower level (<i>footwall of Lower GYD unit</i>) than Rupice (<i>hangingwall of Lower GYD unit</i>) and is interpreted to overlap but not connect with Rupice through the area referred to as the 'Gap'. RNW currently has a strike extent of approximately 250m with mineralization remaining open in most directions. The RNW mineralization appears mostly not impacted by deformation at the scale of drilling and compared to Rupice is a continuous tabular stratabound mineralized body. Multiple mineralized intercepts at RNW have true thicknesses of over 40m along the center axis of mineralization. Mineralization away from the central NW-SE strike axis tapers away at the margins to <1.00m true thickness. This can be 60m to 80m away and either side from the strike axis center line. The up-dip extent of RNW has not as yet been closed-off, therefore a true SW-NE width of mineralization cannot be stated. The strike extent is similarly open. To the NW, the RNW mineralization appears to be thickening and widening on the last sections drilled. To the SE and closest to Rupice, mineralization is still continuous, and has a thickness of up to 20m. On the sections drilled to date, RNW is only closed on the NE side where it rapidly tapers out with the absence of the overlying GYD unit. Rupice NW mineralization is strongly associated with barite forming matrix to sulphides. Barite can be up 80% of mineralized zones. Galena, sphalerite, pyrite and chalcopyrite are the most visible and identifiable sulphides during logging. The footwall zone below massive and semi-massive sulphides is pervasively silica-sericite altered with fine disseminated sulphides throughout and crosscut by base metal stringer zones and mineralized faults / shears. This alteration zone can extend 20m to 30m below massive and semi-massive sulphides. Overall, the footwall zone appears enriched in zinc. On the hanging wall of Rupice NW there is a pyrite rich, low barite, high base metal content horizon of mineralization referred to as the Upper Zone. It is approximately 90m to 100m vertically above Rupice NW. It appears to be a mineralized zone occurring as matrix within a dolomite / limestone breccia. The mineralized Upper Zone marks the transition from Jurassic into mineralized Triassic sediments and generally occurs at the base of a major thrust zone and what is locally referred to as the Upper GYD unit.



Section 2 Reporting of Exploration Results

(Criteria in this section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
Drill hole information	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> - o <i>easting and northing of the drill hole collar</i> - o <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> - o <i>dip and azimuth of the hole</i> - o <i>downhole length and interception depth</i> - o <i>hole length.</i> <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	Drilling data for the reported drill holes is included in Tables 1-3 of Appendix 1.
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i>	Significant intercepts were calculated by applying a lower cut-off grade of 50g/t AgEq (<i>see notes in Table 1 for assumptions for AgEq & ZnEq calculations</i>), Grade recoveries of 90% and commodity prices as used for the Rupice updated MRE from 2020 were applied, since no metallurgical test work has been conducted on the RNW extension area. 1m minimum interval and maximum internal dilution of 5m. A top-cut was not applied. Significant intercepts were reported as weighted averages.
	<i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i>	Short lengths of significant high-grade results were defined as > 600 g/t AgEq, having a minimum 1m interval and maximum internal dilution of 5m. Results are shown in Table 1 of the main reporting document.
	<i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	Equivalent explanations are described in the body of the text.
Relationship between mineralization widths and intercept lengths	<i>These relationships are particularly important in the reporting of Exploration Results.</i>	Only downhole interval lengths are reported.
	<i>If the geometry of the mineralization with respect to the drill hole angle is known, its nature should be reported.</i>	The majority of the high-grade Rupice mineralization is hosted within a brecciated dolomitic unit. Thickening of the central portion of the orebody occurs in an area of interpreted local folding and deformation. Mineralized widths up to 65m true thickness are seen in the central portion of the orebody. To date, the massive sulphide mineralization at Rupice has a defined strike length of 650m with an average true-width thickness of around 20m. However, mineralization at Rupice still remains open along strike to the NW, SE, up-dip and down-dip. Recent drilling by Adriatic Metals BH was mostly inclined at between -55° and -67° to the south, perpendicular to the deposit strike, and intersected the mineralization reasonably orthogonally. Similarly for Rupice NW. Drilling at -45 to -90 degrees has intersected mineralization at a high angle to mineralization dipping to the NE and plunging to the NW from 30 to 40 degrees.
	<i>If it is not known and only the downhole lengths are reported,</i>	Only downhole lengths are reported.



Section 2 Reporting of Exploration Results

(Criteria in this section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
	<i>there should be a clear statement to this effect (e.g. 'downhole length, true width not known').</i>	
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Relevant maps and diagrams are included in the body of the report.
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high-grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	All assay tables for all reported holes are included in the main reporting document.
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	No substantive exploration data not already mentioned in the announcement or in this table have been used.
Further work	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	Further drilling will be undertaken in 2023 for mineralization along strike, and up and down dip. dependent on exploration success and funding. Adriatic Metals has committed to fully defining Rupice NW within its exploration tenement to complete an updated Rupice MRE and Maiden Rupice NW MRE. Drilling will be on a 40m section spacing, with mineralization pierce points nominally 30m between hole intercepts. Fan drilling from a single drill platform per section will be used to intersect the majority of mineralization on sections. Additional drill platforms will be constructed where a single fan cannot fully drill out a section. Specific focus was placed on resolving whether Rupice NW can be connected to the main body of Rupice mineralization. Drilling and geological modelling have resolved that Rupice and Rupice NW are stratigraphically separate but slightly (for now) overlapping mineralized bodies connected to the same mineralizing event. Further work on Rupice NW will focus on infill drilling to an Indicated level of resource risk, extending mineralization south-westward, south-eastward and once land access is secured, to the northwest beyond the current Rupice Exploitation License.