

Rare Earths Drilling Testing Shallow Mineralisation

Engage with this announcement on our interactive [Investor Hub](#)

ABx drilling is finding extensions of the T8 Rare Earths discovery. Assays pending

The grades of Tb & Dy in all of ABx's rare earth resources are the highest of any ionic adsorption clay deposit in Australia and amongst the highest globally

The lightweight rig is designed to have no impact on the cleared grazing land where these rare earths occur near surface, typically starting at 0.5 metres depth

Pursuant to approvals from government and landholders, ABx Group Limited (ASX: **ABX**) has commenced drilling to expand the high grade T8 rare earth elements (REE) mineralisation that ABx's scout drill campaign discovered in May 2025¹ - see Table 1, Figures 1 to 4. The first 3 holes have encountered the target horizon at surface, within 0.5 metres depth.

Table 1: REE discovery hole TB008 in tenement EL27/2025. Hole ended still in the mineralised layer

TB008		East 530787 Nth 5395777		Permanent Magnet REE						
From (m)	To (m)	TREO ppm	TREO-CeO ₂ ppm	Perm Mags ppm	Dy+Tb TREO %	Nd ₂ O ₃ ppm	Pr ₆ O ₁₁ ppm	Tb ₄ O ₇ ppm	Dy ₂ O ₃ ppm	Other REE ppm
0	1	276	165	57	3.2%	39	10	1	8	219
1	2	5,318	3,113	1,218	2.9%	849	213	22	134	4,100
2	3	1,404	1,045	322	4.6%	206	51	8	56	1,082

ABx's Tasmanian rare earth projects are suited to early low cost production because they are shallow, ionic absorption clay type of rare earth resources enriched in the most critical rare earths dysprosium (Dy) and terbium (Tb). ABx has strong relationships with planned processing operations in the USA, such as Ucore.²

Dr Mark Cooksey, Managing Director and CEO of ABx Group, commented:

"ABx is excited to be finding extensions of this shallow target horizon that hosts the T8 high grade rare earth mineralisation. ABx's REE mineralisation in northern Tasmania is exceptionally high grade in Dy & Tb, which is potentially globally significant and unmatched in Australia. ABx is investigating a low cost, low impact method of rapidly developing this rare earth province."

"China's restriction on exports of critical heavy rare earths, especially Dy & Tb, sends a clear message to the global market and ABx is in a unique position with its Dy & Tb-rich shallow clay-hosted rare earth deposit in a stable jurisdiction. Dy & Tb are vital for many products including modern cars, phones, military technologies and offshore wind turbines. This is recognised by the industry, for example our MoU to supply rare earth feedstock to Ucore, which is planning a Strategic Metals Complex in Louisiana with the support of the US Government."

¹ ASX Announcements, 5 & 7 May 2025

² ASX Announcement, 4 September 2024

For more information, please join ABx Group's interactive [Investor Hub](#)
ABx Group Limited

Suite 2, Level 11, 385 Bourke St, Melbourne VIC 3000, Australia
 ABN 14 139 494 885 P: +61 3 9692 7222 | F: +61 2 9956 7355



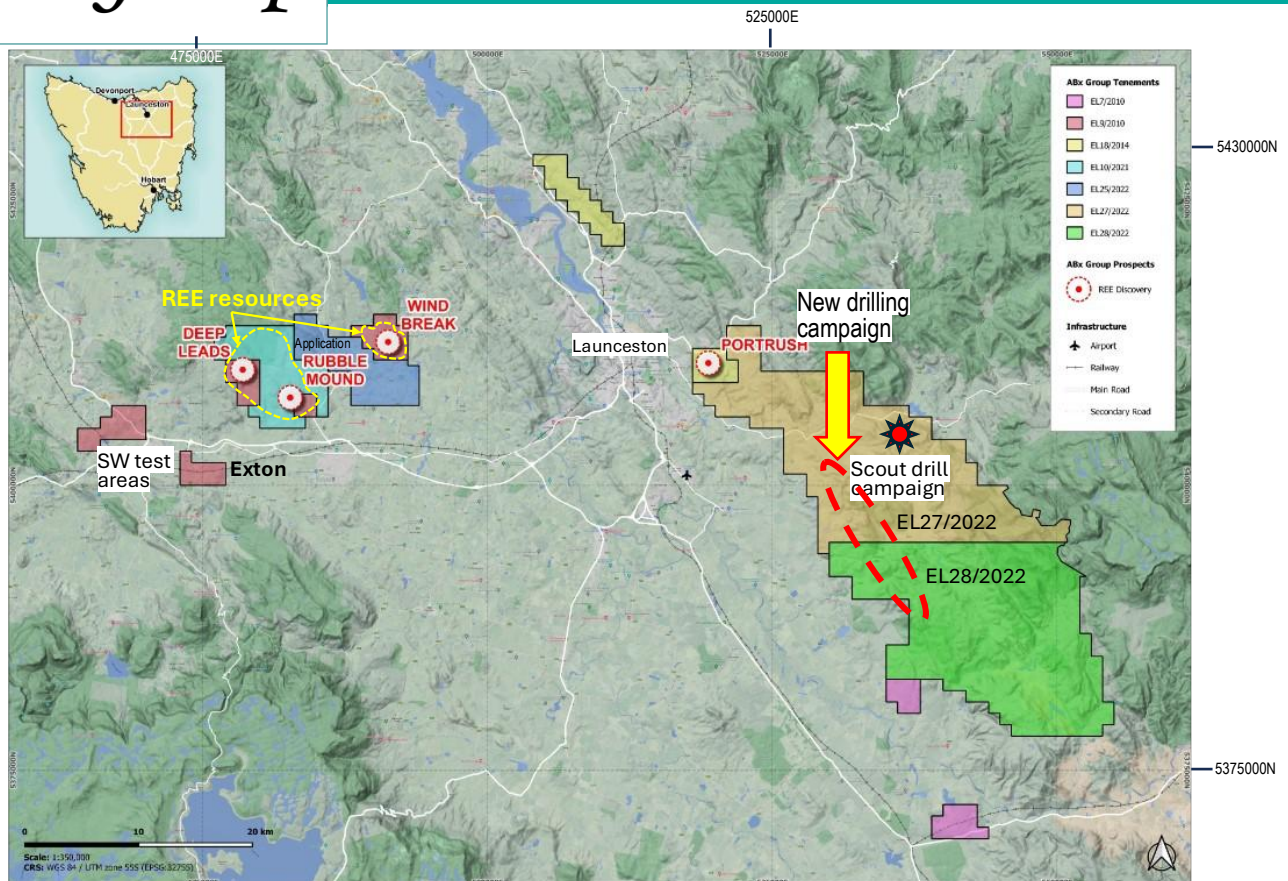


Figure 1: Location of T8 Drilling campaign in November 52 km east of the ABx's REE Resources



Figures 2-4: Commencing new drill program along strike from TB008 in EL27/2022 Temple Bar

This shallow mineralised layer starts immediately below the thin grey soil

Further reports: ABx looks forward to updating shareholders about the progress of its rare earths business, including the quality of the first mixed rare earths carbonate sample to be produced by ANSTO from the Deep Leads bulk sample in the near future, which is eagerly awaited by potential customers.³

This announcement is approved for release by the board of directors.

For further information please contact:

Dr Mark Cooksey

MD & CEO

ABx Group

+61 447 201 536

mcooksey@abxgroup.com.au

www.abxgroup.com.au

Media

Chapter One Advisors

David Tasker / Alex Baker

+61 433 112 936 / +61 432 801 745

dtasker@chapteroneadvisors.com.au /

abaker@chapteroneadvisors.com.au

³ ASX Announcement, 13 October 2025

About ABx Group Limited

ABx Group Limited (ABx) is a uniquely positioned Australian company delivering materials for a cleaner future.

The three priority projects are:

- **Heavy rare earths:** Supplying light and heavy rare earths from Tasmania into Western supply chains
 - Processing Options Analysis conducted in partnership with external experts
- **Clean fluorine chemical production:** Producing industrial chemicals from aluminium smelter by-product (ALCORE)
 - Continuous pilot plant under construction in Bell Bay, Tasmania
- **Near-term bauxite production:** Mining bauxite resources for the aluminium, cement and fertiliser industries
 - Agreements executed with Good Importing International for bauxite projects in Queensland and New South Wales, and \$2.7 million initial payment has been received
 - Approvals well advanced for DL130 bauxite project in northern Tasmania

ABx endorses best practices on agricultural land and strives to leave land and environment better than we find it. We only operate where welcomed.

Disclaimer Regarding Forward Looking Statements

This ASX announcement (Announcement) contains various forward-looking statements. All statements other than statements of historical fact are forward-looking statements. Forward-looking statements are inherently subject to uncertainties in that they may be affected by a variety of known and unknown risks, variables and factors which could cause actual values or results, performance, or achievements to differ materially from the expectations described in such forward-looking statements.

ABx does not give any assurance that the anticipated results, performance, or achievements expressed or implied in those forward-looking statements will be achieved.

Competent Persons Statement

The information in this report that relate to Exploration Information and Mineral Resources are based on information compiled by Ian Levy who is a member of The Australasian Institute of Mining and Metallurgy and the Australian Institute of Geoscientists. Mr Levy is a qualified geologist and a director of ABx Group Limited. Mr Levy has sufficient experience, which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of exploration Results, Mineral Resources and Ore Reserves. Mr Levy has consented in writing to the inclusion in this report of the Exploration Information in the form and context in which it appears.

Table 2 - Summary of resource estimation information of 20 November 2023 referred to above, in accordance with LR 5.8.1

Geology and geological interpretation	REE mineralisation occurs in clay layers that overlie a Jurassic age dolerite basement in a district with some residual weathered Tertiary age alkali basalt. Jurassic age tholeiitic dolerite and Tertiary age bauxite-laterite are the main bedrock geological units. Paleochannels host thicker clay zones which host the rare earth element mineralisation.
Sampling and sub-sampling techniques	Sampling was at 1 metre intervals. Subsampling for assaying is by quartering the clay samples twice and each time, mixing diagonally opposite quarters. Assay results from resampling correspond satisfactorily.
Drilling techniques	Auger drilling
Criteria used for classification, including drill and data spacing and distribution.	Not applicable for this report on a test of exploration technology.
Sample analytical method	Assay samples are analysed by standard NATA-approved induction coupled plasma analytical methods for rare earth elements at ALS labs in Brisbane (method ME-MS81) and LabWest in Perth (method MMA04). Interlab comparisons proved satisfactory.
Estimation methodology	Not applicable for this report about a scout drilling campaign
Cut-off grade	Not applicable for this report about a scout drilling campaign
Mining and metallurgical methods and parameters, and other modifying factors	Not applicable at this initial discovery stage.

JORC Code Appendix 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	Drill hole samples from auger drilling to 12 metres maximum depth but typically 3 to 5 metres depth. Most holes did not reach bedrock.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	Auger holes.
Drill sample recovery	- Method of recording & assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery & ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	- Weight tests indicated reliable sample recovery except for first metre in soils (not used in resource estimates) - No relationship between sample recovery and grade has been observed to date.
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative. Core (or costean, channel, etc) photography. - The total length and percentage of the relevant intersections logged.	Geologically logged by senior geologists. Every sample photographed, with photos, logs and assays entered into ABx's proprietary ABacus database.
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. - Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	Chips are subsampled using bauxite shovel and quartering method in accordance with ISO standards for fine damp clay material.
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. - Nature of quality control procedures adopted (eg standards, blanks, duplicates, external lab checks) & whether acceptable levels of accuracy (ie lack of bias) & precision have been established.	Assaying done at NATA-registered commercial labs of ALS Brisbane Australia and Labwest Minerals Analysis in Western Australia. Duplicate interlab assays and different lab assaying procedures corresponded well.

Criteria	JORC Code explanation	Commentary
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative company personnel. - The use of twinned holes. - Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. - Discuss any adjustment to assay data.	- All assaying done at NATA-registered commercial laboratories of ALS Brisbane Australia and Labwest Minerals Analysis Pty Ltd in Western Australia. - Duplicate interlab assays corresponded well. - No adjustment of assay data done.
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	- GPS hole locations have been tested for accuracy on many prospects, all satisfactorily – usually within 1m. - Grid Coordinates are GDA94 - Topographic control by Lidar topography
Data spacing and distribution	- Data spacing for reporting of Exploration Results. - Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. - Whether sample compositing has been applied.	- Drilling of scout holes at wide spacing up to 2 km - Geological continuity is not yet assessable by this wide-spaced scout drilling campaign - Grade continuity is not yet established - Sample compositing not applied
Orientation of data in relation to geological structure	- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. - If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	- Vertical holes through horizontal clay layers is appropriate - Clay layer drapes over topography and accumulates in gullies. Vertical holes is the appropriate orientation.
Sample security	The measures taken to ensure sample security.	Samples collected and bagged at every hole site and assembled onto pallets daily, shipped to lab weekly.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	Several audits confirmed reliability

Section 2 Reporting of Exploration Results (Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- Satisfactory to excellent. All tenements are in force, unencumbered and securely held by ABx - All drilling is on freehold land with access approvals by landholders
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	ABx is the first company to explore for Rare Earth Elements in northern Tasmania. No prior work has been done by other parties
Geology	Deposit type, geological setting and style of mineralisation.	- Bauxite deposit formed on Lower Tertiary basalts overlying Jurassic dolerite - REE of interest are all in clays
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar	- GPS location. - Airborne Radar RL and LiDAR topography - Lidar topography contoured at 1m height intervals

Criteria	JORC Code explanation	Commentary
	○ elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar ○ dip and azimuth of the hole ○ down hole length and interception depth ○ hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	• All holes are short straight vertical holes
Data aggregation methods	• In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated.	• All data are presented as received from labs • Intercept summaries, if and when presented, are length-weighted arithmetic averages • Total Rare Earth Oxides (TREO) are an aggregate of all rare earth oxides. TREO-CeO₂ is TREO minus Cerium oxide values.
Relationship between mineralisation widths & intercept lengths	• These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	• Mineralisation typically 3 to 6 metres thick and Drillholes are sampled at 1 metre intervals • Horizontal layers drilled by vertical holes means intercept thickness is true thickness
Diagrams	• Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	• Diagrams presented give appropriate information
Balanced reporting	• Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	• All new results are reported in this report and reference made to previous tabulation of data
Other substantive exploration data	• Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	• N.A. Information provided is appropriate.
Further work	• The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). • Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	• Still under assessment. • ABx used this area as a test of ABx's exploration technology and needs to assess the consequences of these discoveries.